

Essential



Industrial Safety Solutions

- *Worker & Workplace Safety*
- *Environmental Protection*

Justrite is a portfolio company of Justrite Safety Group.

For over a century, Justrite Safety Group has helped protect where the world works. Our mission is to identify workplace vulnerabilities and guide customers in creating an ecosystem of safety—so your team can work with confidence.

Confidence





Start with the EssentialSM



A Growing Justrite Family

In recent years we have grown, expanding Justrite Safety Group through the acquisition of other strong, valuable companies. Because of these exciting changes, we want to share our story with you—one of an unrivaled safety portfolio, expertise in environmental protection, a global network of brands, and a steadfast dedication to our customers' safety.

Start with the EssentialTM

The essence of our company is captured in a new tagline: Start with the EssentialSM. At Justrite, everything starts with safety. Protecting people, property and the planet is our first and greatest responsibility. We provide the essential safety products you need to protect your workers and workplace.

Our company logo has recently evolved. The new logo honors our heritage in fire safety, while reflecting our expertise in containment and environmental protection.



Justrite Safety Group offers industrial safety solutions and expert advice from our portfolio companies around the world.

We cover every facet of the industrial safety landscape—from the storage, containment and clean-up of hazardous materials to motion safety and emergency showers.

Whatever your needs, we can help you build the foundation of a safe, productive workplace.



Essential Industrial Safety Products



At Justrite, we partner with customers to better understand, anticipate and systematically address the safety challenges you face every day. Our extensive portfolio allows us to think holistically about your organization's vulnerabilities and deliver enterprise-wide compliance.

Justrite products and expertise help your organization to:

- Reduce fire risks
- Prevent environmental contamination
- Provide emergency relief to injured personnel
- Avoid injuries & accidents
- Avoid fines associated with non-compliance
- Stay in compliance to changing regulations
- Fulfill insurance carrier recommendations
- Improve housekeeping & operational efficiencies

Approval and Compliance Key

| | |
|---------------|---|
| FM | Tested and approved by FM Approvals |
| UL/ULC | Underwriters Laboratories listed in the U.S. and Canada |
| ULCLAS | Tested and Approved by UL; Classified to ANSI Z358.1 |
| TÜV | TÜV Technical Inspection Association certified |
| GS | Geprüfte Sicherheit – safety tested and GS certified by MPA Dresden |
| CE | Conformité Européenne – European conformity mark that is the manufacturer's declaration that a product meets applicable EC directives |
| N | Complies with National Fire Protection Association (NFPA) Flammable and Combustible Liquids Code 30 |
| O | Complies with Occupational Safety and Health Administration (OSHA) Regulations |
| I | Complies with the International Fire Code (IFC) |
| A | Complies with NFPA 1 Fire Code - 2012 Edition |
| A9 | Complies with NFPA 1 Fire Code - 2009 Edition |
| H | Complies with NFPA 400 Hazardous Material Code |
| AN | Meets or exceed American National Standards Institute (ANSI) Z358.1 |
| EN | Complies with European standards EN 14470-1 and EN 14727 |
| ENS | Complies with European standard for showers, EN15154 |
| C | Compressed Gas Association (CGA) P1 Standard for Safe Handling of Compressed Gases in Containers |
| G | Complies with NFPA 55 Compressed Gases and Cryogenic Fluids Code |
| U | U.S. Geological Survey High Hazards Zone Requirements |
| E | Complies with Environmental Protection Agency (EPA) Regulations |
| S | Supports EPA Spill Prevention, Control and Countermeasures Rule (SPCC) |
| V | Validated by the EPA Environmental Technology Verification Program |



Contents

Contents

| | |
|---------------------------------|---------|
| Safety & Storage Cabinets | 6–36 |
| Safety Cans & Containers | 37–64 |
| Smoking Receptacles | 65–67 |
| Gas-Cylinder Handling Equipment | 68–86 |
| Drum Funnels & Equipment | 87–92 |
| Spill Control & Environmental | 93–116 |
| Outdoor Safety Lockers | 117–122 |



Customized to Your Requirements

We offer custom spill berms, safety cabinets and HPLC safety cans. Custom colors for certain products are also available. Whatever the requirement or special need, Justrite safety experts will design and manufacture a solution that meets and exceeds your unique needs.

Free, Consultative Safety Survey

Our free, consultative STUD-E™ surveys address the inherent concerns with handling volatile hazardous liquids. STUD-E surveys are available in comprehensive formats for Storage, Transfer, Use, Disposal and Evaluation of hazardous materials. The surveys are designed to help you meet OSHA

and EPA regulations, and are backed by over a century's worth of safety experience. Put Justrite expertise to work for you to improve your overall safety program.

Providing Global Protection

Justrite safety products are available worldwide. For pricing and availability, simply contact an authorized distributor near you or visit our website at justrite.com.

For Justrite Authorized Distributors

Customer Access Network (CAN)—24/7 Support Sign-up today and call Customer Service at 800-798-9250 for your ID and password, or visit our website and go to Distributor Log-in.

Comprehensive

Safety & Storage Cabinets



Why do I need a safety cabinet?

One of the leading causes of industrial fires is the improper storage and handling of flammable liquids. Safety cabinets help you safely store fuels, chemicals, and solvents to reduce the risk of fire and protect your people and property.

Safety cabinets serve critical functions:

- Improve awareness—high-visibility cabinet color and prominent labeling identify potentially hazardous chemicals
- Keep dangerous liquids safely organized and segregated—for indoor use
- Increase maximum allowable quantities of flammable and combustible liquids in control areas
- Improve efficiency by locating materials near point-of-use
- Improve security with locking mechanism
- Ensure safe evacuation time in the event of a fire
- Provide compliance with federal OSHA regulations and the National Fire Protection Association

Approvals and Compliance

Each Justrite steel safety cabinet meets at least one or more of the following regulations:

- OSHA 1910.106
- National Fire Protection Association (NFPA) Flammable Liquid Code 30
- NFPA Fire Code 1
- International Fire Code (IFC)
- National Fire Code of Canada
- NFPA Hazardous Materials Code 400
- European EN standard 14470-1 and 14727

Most cabinets carry independent, third-party approval:

- FM Approvals
- MPA Dresden



Considerations when selecting a safety cabinet

- Federal, state, and local compliance requirements
- Size and type of container being stored
- Capacity needed
- Type of chemical being stored
- Security and safety features such as U-Loc™ padlockable handle, SpillSlope® shelves, Haz-Alert™ warning labels, all welded construction

10 Year
Limited Warranty



8 Safety & Storage Cabinets

Sure-Grip® EX safety storage cabinets offer top performance for indoor flammable liquid storage and protection.

Fusible links hold doors wide open and melt at 165 F (74 C) for automatic closure (on self-closing models).

Sturdy 18-gauge (1-mm) double wall steel construction with 1-1/2-in (38-mm) of insulating air space.

Easy-close, self-latching doors; U-Loc™ handle (shown below) does not require manual rotation to engage mandatory three-point latch.

Fully welded, not riveted, construction holds squareness for longer life and offers greater protection in a fire since air gaps are reduced.

Continuous piano hinge provides smooth closure.

Durable and chemical-resistant, lead-free powder-coat paint finish, inside and out, retains high gloss look and minimizes the effects of corrosion and humidity.

Dual vents with built-in flash arresters strategically placed at bottom and opposite top.




Concealed self-close mechanism provides obstruction-free access to top shelf space. Self-indexing doors guarantee they will close in sequence and ensure a tight closure from top to bottom (on self-closing models). **Patented.**

Patented SpillSlope® safety shelves direct spills to back and bottom of leakproof sump. Adjustable on 3-in (76-mm) centers, they meet ANSI standards with a 350-lb (159-kg) safe allowable load.

Welded shelf hangers interlock with shelf to offer maximum stability with no flimsy brackets to lose.

2-in (51-mm) leakproof containment sump holds leaks and meets EPA requirements.


45-gal (170-L) self-close door style



Stainless steel, 3-point bullet self-latching system provides fail-safe, positive door closure with increased heat resistance.



Complies with OSHA 29 CFR 1910.106 and NFPA Code 30, section 9.5.3



Adjustable leveling feet support cabinets on uneven surfaces.



U-Loc™ handle includes double key set or can be padlocked (not included) for greater security.



SpillSlope® safety shelves direct spills to back and bottom of leakproof sump. Meets ANSI MH28.1



Welded construction holds squareness for long life; door astragal provides extra sturdiness.



Highly visible HazAlert™ reflective label provides warning—"Flammable – Keep Fire Away" in English, Spanish, and French.



Built-in grounding connector Shown with optional ground wire 08500.

Sure-Grip® EX Classic Safety Cabinets

Protect workers, reduce fire risks, and improve productivity by storing flammable fuels and chemicals in OSHA- and NFPA-compliant safety cabinets

- Independently fire tested and approved by FM Approvals
- 18-gauge (1-mm) thick double-wall, welded steel with 1-1/2-in (38-mm) of insulating air space.
- Adjustable, patented SpillSlope® galvanized steel shelves direct spills to back and bottom of 2-in (51-mm) leakproof sump
- 3-point stainless steel bullet latching system
- Self-closing models feature a fusible link that holds doors open—in fire conditions it melts at 165 F (74 C) for automatic closure. Concealed mechanism offers obstruction-free access to contents.
- U-Loc™ handle with two keys—accepts optional padlock
- Trilingual warning with Haz-Alert™ reflective labels
- Includes dual vents with flame arresters, adjustable leveling feet, and grounding connector



Complies with OSHA and provides 10 minutes of evacuation time.



| Capacity Gal/L | Doors and Style | H x W x D | Shelves | Approv/Lstg Regulation | Model | CA Prop 65 |
|----------------|--------------------|----------------------|----------------|------------------------|--------|------------|
| 30/114 | 2 door, manual | 44 x 43 x 18 in | 1 | FM, N, O, A | 893000 | |
| | 2 door, self-close | 1118 x 1092 x 457 mm | | FM, N, O, A, I | 893020 | ⚠ |
| 45/170 | 2 door, manual | 65 x 43 x 18 in | 2 | FM, N, O, A | 894500 | |
| | 2 door, self-close | 1651 x 1092 x 457 mm | | FM, N, O, A, I | 894520 | ⚠ |
| 60/227 | 2 door, manual | 65 x 34 x 34 in | | FM, N, O, A | 896000 | |
| | 2 door, self-close | 1651 x 864 x 864 mm | | FM, N, O, A, I | 896020 | ⚠ |
| 90/341* | 2 door, manual | 65 x 43 x 34 in | FM, N, O, A | 899000 | | |
| | 2 door, self-close | 1651 x 1092 x 864 mm | FM, N, O, A, I | 899020 | ⚠ | |

*OSHA 29CFR 1910.106(d)(3) states that not more than 60 gallons (227 L) of Category 1, 2, or 3 flammable liquids, nor more than 120 gallons (454 L) of Category 4 flammable liquids may be stored in a safety cabinet.

| Accessories | Fits Cabinet Styles | W x D | Model |
|-------------------------|--|--------------------------------|-------|
| SpillSlope® steel shelf | 30 & 45 gallon (114 & 170 L) - 43 in W (1092 mm) | 39.375 x 14 in (1000 x 356 mm) | 29937 |
| | 30 gallon (114 L) - 36 in W (914 mm) | 32.375 x 20 in (822 x 508 mm) | 29942 |
| | 60 gallon (227 L) - 34 in W (864 mm) | 30.375 x 29 in (771 x 737 mm) | 29944 |
| | 90 gallon (341 L) - 43 in W (1092 mm) | 39.375 x 29 in (1000 x 737 mm) | 29945 |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

10 Safety & Storage Cabinets

Sure-Grip® EX Safety Cabinets – Optional Colors

Same benefits like Sure-Grip® EX classic yellow cabinets, in 3 different colors for color-coding convenience

- Differentiate different types of liquids
- Segregate incompatible liquids
- Quick visual reference for workers



893001



893003



893005

| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Red Model | Gray Model | White Model | CA Prop 65 |
|----------------|--------------------|---------------------------------------|----------------|------------------------|-----------|------------|-------------|------------|
| 30/114 | 2 door, manual | 44 x 43 x 18 in | 1 | FM, N, O, A | 893001 | 893003 | 893005 | |
| | 2 door, self-close | 1118 x 1092 x 457 mm | | FM, N, O, A, I | 893021 | 893023 | 893025 | ⚠ |
| | 2 door, manual | 35 x 36 x 24 in 889 x 914 x 610 mm | | FM, N, O, A | 893301 | 893303 | 893305 | |
| 45/170 | 2 door, manual | 65 x 43 x 18 in | 2 | FM, N, O, A | 894501 | 894503 | 894505 | |
| | 2 door, self-close | 1651 x 1092 x 457 mm | | FM, N, O, A, I | 894521 | 894523 | 894525 | ⚠ |
| 60/227 | 2 door, manual | 65 x 34 x 34 in | | FM, N, O, A | 896001 | 896003 | 896005 | |
| | 2 door, self-close | 1651 x 864 x 864 mm | | FM, N, O, A, I | 896021 | 896023 | 896025 | ⚠ |
| 90/341* | 2 door, manual | 65 x 43 x 34 in | FM, N, O, A | 899001 | 899003 | 899005 | | |
| | 2 door, self-close | 1651 x 1092 x 864 mm | FM, N, O, A, I | 899021 | 899023 | 899025 | ⚠ | |

*OSHA 29CFR 1910.106(d)(3) states that not more than 60 gallons (227 L) of Category 1, 2, or 3 flammable liquids, nor more than 120 gallons (454 L) of Category 4 flammable liquids may be stored in a safety cabinet.

Sure-Grip® EX Safety Cabinets – Single Door

Full size, full storage capacity safety cabinets with a unique single-door design

- Same benefits of Sure-Grip® EX classic cabinets, but with a bifold, sliding single door that self-latches and self-closes
- Fusible link holds door open and automatically closes it under fire conditions
- Heavy-duty steel dual-track guidance system ensures smooth closure



893080

| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Yellow Model | Red Model | Gray Model | White Model | CA Prop 65 |
|----------------|-------------------------------|---|---------|------------------------|--------------|-----------|------------|-------------|------------|
| 30/114 | 1 bi-fold sliding self-close | 44 x 43 x 18 in 1118 x 1092 x 457 mm | 1 | FM, N, O, A, I | 893080 | — | — | — | ⚠ |
| 45/170 | 1 bi-fold sliding, self-close | 65 x 43 x 18 in 1651 x 1092 x 457 mm | 2 | | 894580 | 894581 | — | — | ⚠ |
| 60/227 | 1 bi-fold sliding, self-close | 65 x 34 x 34 in 1651 x 864 x 864 mm | | | 896080 | 896081 | — | — | ⚠ |
| 90/341* | 1 bi-fold sliding, self-close | 65 x 43 x 34 in 1651 x 1092 x 864 mm | 899080 | | — | — | — | ⚠ | |

*OSHA 29CFR 1910.106(d)(3) states that not more than 60 gallons (227 L) of Category 1, 2, or 3 flammable liquids, nor more than 120 gallons (454 L) of Category 4 flammable liquids may be stored in a safety cabinet.

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



Colors to organize your storage.

Sure-Grip® EX Slimline Safety Cabinets

Safely store flammables when floor space is tight or use to expand storage alongside existing cabinets

- Fire tested and approved by FM Approvals; complies with OSHA and NFPA
- 18-gauge (1-mm) thick double-wall, welded steel with 1-1/2-in (38-mm) of insulating air space
- 3-point stainless steel bullet latching system
- U-Loc™ handle with two keys—accepts optional padlock
- Adjustable, patented SpillSlope® galvanized steel shelves direct spills to 2-in (51-mm) leakproof sump
- Trilingual warning with Haz-Alert™ reflective labels
- Includes dual vents with flame arresters, adjustable leveling feet, grounding connector
- Self-closing models equipped with fusible link holds door open during use and melts at 165 F (74 C) to automatically close under fire conditions



| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Yellow Model | Red Model | Gray Model | White Model | CA Prop 65 |
|------------------|--------------------|---|---------|------------------------|--------------|-----------|------------|-------------|------------|
| 22/83 (standard) | 1 door, manual | 65 x 23.25 x 18 in 1651 x 591 x 457 mm | 3 | FM, N, O, A | 892200 | 892201 | 892203 | 892205 | |
| | 1 door, self-close | | | FM, N, O, A, I | 892220 | 892221 | 892223 | 892225 | ⚠ |
| 54/204 (deep) | 1 door, manual | 65 x 23.25 x 34 in 1651 x 591 x 864 mm | | FM, N, O, A | 895400 | 895401 | 895403 | 895405 | |
| | 1 door, self-close | | | FM, N, O, A, I | 895420 | 895421 | 895423 | 895425 | ⚠ |

| Accessories | Fits Cabinet Styles | W x D | Model |
|-------------------------|---------------------------------|-------------------------------|-------|
| SpillSlope® steel shelf | 22 gallon (83 L) slimline | 19.625 x 14 in (498 x 356 mm) | 29936 |
| | 54 gallon (204 L) deep slimline | 19.625 x 29 in (498 x 737 mm) | 29941 |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

12 Safety & Storage Cabinets

Sure-Grip® EX Piggyback Safety Cabinets

Low-height design allows you to store flammables on bench tops or on top of 30- or 45-gallon (114- and 170-L) cabinets

- Expand storage and safety segregate liquids
- Complies with OSHA and NFPA, FM-approved
- All welded, double-walled 18-gauge (1-mm) steel with 1-1/2-in (38-mm) of insulating air space
- Failsafe, 3-point stainless steel bullet latching system
- Leakproof 2-in (51-mm) sump captures spills
- U-Loc™ handle with two keys—accepts optional padlock
- Trilingual warning with Haz-Alert™ reflective labels
- Includes dual vents with flame arresters, adjustable leveling feet, grounding connector
- Self-closing models equipped with fusible link holds doors open during use and melts at 165 F (74 C) to automatically close under fire conditions
- Wall mount with optional wall hanger assembly, no. 25950



Piggyback cabinets can be stacked for better organization.



891300

891700

| Capacity Gal/L | Number of and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Yellow Model | Red Model | Gray Model | White Model | CA Prop 65 |
|----------------|---------------------|---------------------|---------|------------------------|--------------|-----------|------------|-------------|------------|
| 12/45 | 2 door, manual | 18 x 43 x 18 in | 0 | FM, N, O, A | 891300 | 891301 | 891303 | 891305 | |
| | 2 door, self-close | 457 x 1092 x 457 mm | | FM, N, O, A, I | 891320 | 891321 | 891323 | 891325 | ⚠ |
| 17/64 | 2 door, manual | 24 x 43 x 18 in | 1 | FM, N, O, A | 891700 | 891701 | 891703 | 891705 | |
| | 2 door, self-close | 610 x 1092 x 457 mm | | FM, N, O, A, I | 891720 | 891721 | 891723 | 891725 | ⚠ |

| Extra Accessories | Fits Cabinet Styles | Dimensions W x D | Model |
|-------------------------|---|--------------------------------|-------|
| SpillSlope® steel shelf | 17 Gallon (64 L) piggyback | 39.375 x 14 in (1000 x 356 mm) | 29937 |
| Wall mount kit | 12 & 17 Gallon (45 L & 64 L) piggyback cabinets | — | 25950 |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

justrite.com See page 4 for Approval & Compliance Key

Sure-Grip® EX Countertop Safety Cabinets

- Compliant, compact design offers same fire protection of larger Justrite cabinets
- Use on workbenches for access to often-used liquids
- Door self-latches for secure closure. Self-close style also automatically closes when fusible link melts under fire conditions.
- Save space by mounting on wall with optional wall hanger assembly no. 25951



890400



Place cabinets near points-of-use to save time.

| Capacity Gal/L | Number of Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Yellow Model No | Red Model No | Gray Model No | White Model No | CA Prop 65 |
|----------------|-------------------------------|---------------------------------------|---------|------------------------|-----------------|--------------|---------------|----------------|------------|
| 4/15 | countertop; 1 door, manual | 22 x 17 x 17 in 559 x 432 x 432 mm | 1 | N, O, A | 890400 | 890401 | 890403 | 890405 | |
| | countertop; 1 door self-close | | | N, O, A, I | 890420 | 890421 | 890423 | 890425 | ⚠ |

| Accessories | Fits Cabinet Styles | W x D | Model |
|-------------------------|-------------------------|-------------------------------|-------|
| SpillSlope® steel shelf | 4 gallon (15 L) cabinet | 13.375 x 13 in (340 x 330 mm) | 29935 |
| Wall hanger mount kit | | — | 25951 |

Sure-Grip® EX Compac Safety Cabinets

- FM-approved, complies with OSHA and NFPA for storage of flammables
- Fire-resistant design includes double-walled steel with 1-1/2-in (38-mm) of insulating air space and 3-point stainless steel bullet latch for positive, failsafe door closure
- Adjustable SpillSlope® safety shelf directs spills to leakproof 2-in (51-mm) sump
- Dual vents with flame arresters, leveling feet, and grounding connector
- 12-gal (45-L) cabinets at 35-in (889-mm) high fits under most workbenches



891200



| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Yellow Model | Red Model | Gray Model | White Model | CA Prop 65 |
|----------------|---------------------------|---|---------|------------------------|--------------|-----------|------------|-------------|------------|
| 12/45 | compac; 1 door manual | 35 x 23.25 x 18 in 889 x 591 x 457 mm | 1 | FM, N, O, A | 891200 | 891201 | 891203 | 891205 | |
| | compac; 1 door self-close | | | FM, N, O, A, I | 891220 | 891221 | 891223 | 891225 | ⚠ |
| 15/57 | compac; 1 door manual | 44 x 23.25 x 18 in 1118 x 591 x 457 mm | | FM, N, O, A | 891500 | 891501 | 891503 | 891505 | |
| | compac; 1 door self-close | | | FM, N, O, A, I | 891520 | 891521 | 891523 | 891525 | ⚠ |

| Accessories | Fits Cabinet Styles | W x D | Model |
|-------------------------|---------------------------------------|-------------------------------|-------|
| SpillSlope® steel shelf | 12 & 15 gallon (45 L & 57 L) cabinets | 19.625 x 14 in (498 x 356 mm) | 29936 |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

14 Safety & Storage Cabinets

Mini Safety Cabinet

- Small footprint cabinet safely stores flammables within close reach—relocates easily
- Three bungee cords keep contents in place when transporting around shop floor
- Adjustable shelf maximizes cabinet space
- Complies with OSHA and NFPA



890200



Easily transport cabinet to locations throughout your facility.

| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Model |
|----------------|----------------------|--------------------------------------|---------|------------------------|--------|
| Aerosols | mini; 1 door, manual | 22 x 17 x 8 in 559 x 432 x 203 mm | 1 | N, O, A | 890200 |

Aerosol Can Benchtop Safety Cabinet

- OSHA- and NFPA-compliant compact cabinet offers hassle-free organization of aerosol cans anywhere
- Fits up to 24 cans in two steel roll-out shelves with easy glide plastic rollers and top guard protection
- Each shelf comes with an insert that holds twelve 2-3/4-in (70-mm) diameter x 10-in (254-mm) tall aerosol cans



890500



Shelves roll out for easy access.

| Capacity | Exterior H x W x D | Roll-out Shelves | Approv/Lstg Regulation | Model |
|----------|---------------------------------------|------------------|------------------------|--------|
| 24 cans | 27 x 21 x 18 in 686 x 533 x 457 mm | 2 | N, O, A | 890500 |

Sure-Grip® EX Undercounter Safety Cabinets

Position a safety cabinet under a counter to take advantage of storage space and keep liquids near benchtop work space

- Recessed toe kick improves ergonomics by allowing user to stand closer to work surface
- Dual back wall vents with flame arrester permit venting if needed
- Fire-resistant, leakproof design with 3-point bullet latch for failsafe closure
- SpillSlope® shelf directs spills to back and down to sump
- OSHA- and NFPA-compliant, FM-approved



Conveniently locate liquids near work areas.

| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Yellow Model | Red Model | Gray Model | White Model | CA Prop 65 |
|----------------|--------------------|--------------------|---------|------------------------|--------------|-----------|------------|-------------|------------|
| 22/83 | 2 door, manual | 35 x 35 x 22 in | 1 | FM, N, O, A | 892300 | 892301 | 892303 | 892305 | |
| | 2 door, self-close | 889 x 889 x 559 mm | | FM, N, O, A, I | 892320 | 892321 | 892323 | 892325 | ⚠ |

| Accessories | Fits Cabinet Styles | W x D | Model |
|-------------------------|---------------------------------------|------------------------------|-------|
| SpillSlope® steel shelf | 22 gallon (83 L) undercounter cabinet | 31.56 x 18 in (802 x 457 mm) | 29939 |

Sure-Grip® EX Wall-Mount Safety Cabinets

Make the most of usable storage space—hang cabinet above workbench for easy access to work solvents

- Fully compliant, fire-resistant design like larger Justrite safety cabinets
- Eye-level positioning allows easy access to often-used liquids
- Comes complete with mounting hardware

| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Model |
|----------------|-----------------|---|---------|------------------------|---------|
| 17/64 | 2 door, manual | 24 x 43 x 18 in 610 x 1092 x 457 mm | 1 | N, O, A | 8917008 |
| 20/76 | | 44 x 43 x 12 in 1118 x 1092 x 305 mm | 3 | FM, N, O, A | 893400 |

| Accessories | Fits Cabinet Styles | W x D | Model |
|-------------------------|-------------------------------------|-----------------------------------|-------|
| SpillSlope® steel shelf | 17 gallon (64 L) wall mount cabinet | 39.375 x 14 in (1000 x 356 mm) | 29937 |
| | 20 gallon (76 L) wall mount cabinet | 39.375 x 8.625 in (1000 x 219 mm) | 29938 |



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Sure-Grip® EX Safety Cabinet and Can Combo Package

Combination package of a safety cabinet with six safety cans—perfect for equipping a new facility with popular flammable storage products

- Cabinet meets OSHA and NFPA, FM-approved
- Type I cans also meet federal regulations, are accepted under CARB, and independently tested and approved by FM Approvals, UL listed in the U.S. and Canada, and are certified by TUV Technical Inspection Certification



8930208



8945008

| Capacity Gal/L | Doors and Style | Exterior H x W x D | Cabinet and Can Number | Approv/Lstg Regulation | Model | CA Prop 65 |
|----------------|----------------------|---|---------------------------------------|------------------------|---------|------------|
| 30/114 | 2 door, manual-close | 44 x 43 x 18 in 1118 x 1092 x 457 mm | 893000 cabinet with six 7150100 cans | FM, N, O, A | 8930008 | |
| | 2 door, self-close | | 893020 cabinet with six 7150100 cans | FM, N, O, A, I | 8930208 | ⚠ |
| 45/170 | 2 door, manual-close | 65 x 43 x 18 in 1651 x 1092 x 457 mm | 894500 cabinet with nine 7150100 cans | FM, N, O, A | 8945008 | |
| | 2 door, self-close | | 894520 cabinet with nine 7150100 cans | FM, N, O, A, I | 8945208 | ⚠ |

Sure-Grip® EX High Security Cabinets

Use in environments requiring increased security against unauthorized access of flammable liquids

- Fully compliant fire-resistant design, FM-approved
- High visibility steel crossbar across both doors with sidebars offer double layer steel strength, deters prying
- Side bars accept padlocks (not included) for increased security
- Includes two shelves; blue and green cabinet also include a poly liner for shelves and sump to protect against corrosion
- For correctional facilities, site trailers, and schools



| Capacity Gal/L | Color | Label | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Manual Close Model | Self-Close Model | CA Prop 65 |
|----------------|--------|-----------|---|---------|------------------------|--------------------|------------------|------------|
| 45/170 | yellow | flammable | 65 x 43 x 18 in 1651 x 1092 x 457 mm | 2 | FM, N, O, A | 29884Y | SC29884Y | ⚠ |
| | red | flammable | | | | 29884R | SC29884R | ⚠ |
| | green | pesticide | | | | 29884P | SC29884P | ⚠ |
| | blue | acid | | | | 29884B | SC29884B | ⚠ |

| Accessories | Fits Cabinet Styles | W x D | Model |
|----------------------------------|------------------------------------|--------------------------------|--------|
| SpillSlope® steel shelf | 30 & 45 gallon — 43 in W (1092 mm) | 39.375 x 14 in (1000 x 356 mm) | 29937 |
| Replacement security bar, red | 45 gallon | 2 x 0.25 in (51 x 6 mm) | 50961R |
| Replacement security bar, yellow | 45 gallon | 2 x 0.25 in (51 x 6 mm) | 50962Y |
| Set of two No. 5 Master Locks® | | | 50963A |

Master Lock® is a registered trademark of Master Lock Co.

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



90-Minute EN Safety Storage Cabinets

Extreme fire resistance for high-risk environments such as high occupancy sites, high-value/high asset settings, or remote areas that lack fire-fighting services

- Steel exterior with multiple layers of fire-resistant gypsum and mineral fiber insulation
- Intumescent strips expand to seal gaps in case of fire
- Hybrid-close door—manual close doors stop in any position, but self-close at 122 F (50 C) under fire conditions
- Independent cylinder locks on each door with locking state indicator
- Two top vents with butterfly valve close automatically at 158 F (70 C) in a fire
- Removable sump with perforated insert captures spills—keeps containers elevated to stay dry
- Transport base accepts pallet jack to move empty cabinet—accepts optional, removable base cover
- Meets EN, OSHA, NFPA and approved by FM Approvals and MPA Dresden



Ninety-minutes of fire protection provides high level of safety when point-of-use storage is required.



22605



22607 with optional base cover 22637

Powered by **asecos**

| Fire Rating (Minutes) | Capacity Gal/L (5 Gallon Can) | Maximum Capacity* (1 Liter Bottle) | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Model |
|-----------------------|-------------------------------|------------------------------------|----------------------|---|---------|------------------------|-------|
| 90 | 30/114 | 168 | 2 door, hybrid-close | 76.89 x 35.16 x 24.21 in (1953 x 893 x 615 mm) | 3 | FM, EN, N, O, A | 22605 |
| | 45/170 | 264 | | 76.89 x 46.97 x 24.21 in (1953 x 1193 x 615 mm) | | | 22607 |

*Achieved through the use of additional shelves, maximum capacity is an estimate and may vary depending upon container size. Check with local authority for maximum allowable quantity restrictions.

18 Safety & Storage Cabinets



Position single-door extreme fire resistance cabinets where space is limited. Add a second cabinet if storage needs increase.



30-Minute EN Safety Storage Cabinets

Safely store flammables—30 minutes of fire protection extends evacuation time

- Meets EN, OSHA, NFPA and approved by FM Approvals and MPA Dresden
- Two-toned yellow body of melamine resin and flame retardant plates, with a steel door covered by textured, power-coat finish
- Intumescent protection strips expand and seal gaps between the door(s) and frame
- Hybrid-close door(s)—manually close and stops in any position, but self-close at 122 F (50 C) under fire conditions
- Independent cylinder locks on doors with locking state indicator
- Air vents close at 158 F (70 C) in event of a fire
- Removable sump with perforated insert captures spills—keeps containers elevated to stay dry
- Transport base accepts pallet jack to move empty cabinet—accepts optional, removable base cover



22601



22603 with optional base cover 22635



22632



22631



22633



22634



22638

| Fire Rating (Minutes) | Capacity Gal/L (5 Gallon Can) | Maximum Capacity* (1 Liter Bottle) | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Model |
|-----------------------|-------------------------------|------------------------------------|----------------------|---|---------|------------------------|-------|
| 30 | 30/114 | 168 | 1 door, hybrid-close | 76.65 x 34.02 x 24.41 in (1947 x 864 x 620 mm) | 3 | FM, EN, N, O, A | 22601 |
| | 45/170 | 264 | 2 door, hybrid-close | 76.65 x 45.83 x 24.41 in (1947 x 1164 x 620 mm) | | | 22603 |

*Achieved through the use of additional shelves, maximum capacity is an estimate and may vary depending upon container size. Check with local authority for maximum allowable quantity restrictions.

| Accessories | Fits Cabinet Styles | Dimensions | Model |
|----------------------------|---|---|-------|
| Steel shelf, powder-coated | 30 and 90 minute - 30 gallon (114 L) | W x D: 29.21 x 17.3 in (742 x 435 mm) | 22630 |
| | 30 and 90 minute - 45 gallon (170 L) | W x D: 41.02 x 17.3 in (1042 x 435 mm) | 22631 |
| Polypropylene tray | 30 and 90 minute - 30 gallon (114 L) | H x W x D: 3.47 x 29.13 x 17.09 in (88 x 740 x 434 mm) | 22632 |
| Polyethylene tray | 30 and 90 minute - 45 gallon (170 L) | H x W x D: 1.97 x 40.95 x 16.93 in (50 x 1040 x 430 mm) | 22633 |
| Base cover | 30 minute - 30 gallon (114 L) | H x W: 3.43 x 30.95 in (87 x 786 mm) | 22634 |
| | 30 minute - 45 gallon (170 L) | H x W: 3.43 x 42.76 in (87 x 1086 mm) | 22635 |
| | 90 minute - 30 gallon (114 L) | H x W: 3.35 x 32.21 in (85 x 818 mm) | 22636 |
| | 90 minute - 45 gallon (170 L) | H x W: 3.35 x 44.02 in (85 x 1118 mm) | 22637 |
| Cabinet mover - Set of 2 | 30 and 90 minute - 30 & 45 gallon (114 & 170 L) | H x W x D: 3.54 x 5.51 x 23.62 in (90 x 140 x 600 mm) | 22638 |

Sure-Grip® EX Under Fume Hood Safety Cabinets

Fully compliant, designed for safe storage of solvents and flammable in laboratories

- Fits under fume hoods, benches, and counters—with ergonomic 4-in (102-mm) high x 3-in (77-mm) deep toe kick for standing close, less leaning
- 35-3/4-in (908-mm) height includes leg levelers installed and extended 5/8-in (15.9-mm)
- Welded, 18-gauge (1-mm) steel double-wall with 1-1/2-in (38-mm) insulating air space
- SpillSlope® shelf directs spills into 2-in (51-mm) leakproof sump
- Durable power-coat finish
- Reflective Haz-Alert™ hazard labels for easy visibility



Use these cabinets for the safe storage of flammables under fume hoods, benches or counters.



882410



882424



883607

| Capacity Gal/L | Doors and Style | Exterior H x W x D | Approv/Lstg Regulation | Yellow Model | Silver Model | Lt Neutral Model | CA Prop 65 |
|----------------|---------------------------------|---|------------------------|--------------|--------------|------------------|------------|
| 15/57 | 1 door, right hinge, manual | 35.75 x 24 x 21.625 in 908 x 610 x 549 mm | FM, O, A, N | 882400 | 882404 | 882407 | |
| | 1 door, left hinge, manual | | | 882410 | 882414 | 882417 | |
| | 1 door, right hinge, self-close | | FM, O, A, N, I | 882420 | 882424 | 882427 | ⚠ |
| | 1 door, left hinge, self-close | | | 882430 | 882434 | 882437 | ⚠ |
| 19/72 | 2 doors, manual | 35.75 x 30 x 21.625 in 908 x 762 x 549 mm | FM, O, A, N | 883000 | 883004 | 883007 | |
| | 2 doors, self-close | | FM, O, A, N, I | 883020 | 883024 | 883027 | ⚠ |
| 23/87 | 2 doors, manual | 35.75 x 36 x 21.625 in 908 x 914 x 549 mm | FM, O, A, N | 883600 | 883604 | 883607 | |
| | 2 doors, self-close | | FM, O, A, N, I | 883620 | 883624 | 883627 | ⚠ |
| 31/117 | 2 doors, manual | 35.75 x 48 x 21.625 in 908 x 1219 x 549 mm | FM, O, A, N | 884800 | 884804 | 884807 | |
| | 2 doors, self-close | | FM, O, A, N, I | 884820 | 884824 | 884827 | ⚠ |

| Accessories | Fits Cabinet Styles | Dimensions W x D | Model |
|-------------------------|---------------------|--------------------------------|-------|
| SpillSlope® steel shelf | 15 gallon (57 L) | 20.125 x 18 in (511 x 457 mm) | 29950 |
| | 19 gallon (72 L) | 26.125 x 18 in (664 x 457 mm) | 29951 |
| | 23 gallon (87 L) | 32.5 x 18 in (826 x 457 mm) | 29949 |
| | 31 gallon (117 L) | 44.333 x 18 in (1130 x 457 mm) | 29953 |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Sure-Grip® EX Flammable Waste Safety Cabinets

- Fire-resistant, fully compliant design for the temporary collection and segregation of flammable liquid waste
- Clearly marked to reduce mix up of contents
- SpillSlope® shelves capture spills in 2-in (51-mm) leakproof sump
- Three-point stainless steel bullet latch for positive closure
- U-Loc™ handle with two keys, accepts optional padlock
- Includes integral vents with flame arresters, built-in grounding connector, and leveling feet



8930053

| Capacity Gal/L | Doors | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Model | CA Prop 65 |
|----------------|--------------------|--|---------|------------------------|---------|------------|
| 30/114 | 2 door, manual | 44 x 43 x 18 in (1118 x 1092 x 457 mm) | 1 | FM, N, O, A | 8930053 | |
| | 2 door, self-close | | | FM, N, O, A, I | 8930253 | ⚠ |
| 45/170 | 2 door, manual | 65 x 43 x 18 in (1651 x 1092 x 457 mm) | 2 | FM, N, O, A | 8945053 | |
| | 2 door, self-close | | | FM, N, O, A, I | 8945253 | ⚠ |

Sure-Grip® EX Flammable Waste Drum Storage Cabinets

- Safely segregate and temporarily store large quantities of flammable waste
- 18-gauge (1-mm) double-wall, welded steel with 1-1/2-in (38-mm) of insulating air space for fire resistance
- Self-latching doors with 3-point stainless steel bullet latch for secure closure
- Half-depth shelf for extra storage—sized to provide enough space for a drum pump or funnel
- 2-in (51-mm) leakproof sump contains spills
- U-Loc™ handle with two keys, dual vents with flame arresters, built-in grounding connector, and leveling feet



8991053

| Drum Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Model | CA Prop 65 |
|------------------------------|--------------------|--|---------|------------------------|---------|------------|
| One vertical drum - 55/200 | 2 door, manual | 65 x 34 x 34 in (1651 x 864 x 864 mm) | 1 | FM, N, O, A | 8962053 | |
| | 2 door, self-close | | | FM, N, O, A, I | 8962253 | ⚠ |
| Two vertical drums - 55/200* | 2 door, manual | 65 x 59 x 34 in (1651 x 1499 x 864 mm) | | N, O, A | 8991053 | |

*OSHA 29CFR 1910.106(d)(3) states that not more than 60 gallons (227 L) of Category 1, 2, or 3 flammable liquids, nor more than 120 gallons (454 L) of Category 4 flammable liquids may be stored in a safety cabinet.

| Accessories | Fits Cabinet Styles | Dimensions W x D | Model |
|------------------------------------|--|--------------------------------|-------|
| SpillSlope® steel shelf | 30 & 45 gallon (114 & 170 L) - 43 in W (1092 mm) | 39.375 x 14 in (1000 x 356 mm) | 29937 |
| SpillSlope® half-depth steel shelf | Single vertical 55-gallon (200 L) drum | 30.375 x 14 in (771 x 356 mm) | 29946 |
| | Double vertical 55-gallon (200 L) drum | 55.375 x 14 in (1406 x 356 mm) | 29947 |
| Drum roller | Single vertical 55-gallon (200 L) drum | 29.5 x 30 in (749 x 762 mm) | 25920 |
| | Double vertical 55-gallon (200 L) drum | 55.5 x 30 in (1408 x 762 mm) | 25922 |
| Drum ramp for all drum cabinets | All drum cabinets | 28 x 24.5 in (711 x 622 mm) | 25932 |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Sure-Grip® EX Vertical Drum Safety Cabinets

- OSHA- and NFPA-compliant vertical storage for one or two 30- or 55-gallon (110- to 200-L) drums
- 18-gauge (1-mm) double-wall, welded steel with 1-1/2-in (38-mm) of insulating air space for fire resistance
- Half-depth shelf adjusts to accommodate a drum with pump or funnel, or stores spare drum accessories
- Models with drum rollers facilitate the movement of heavy drums; models with removable drum support keeps drum elevated off cabinet sump



Design allows cabinet to be used as a pumping station.

| Drum Capacity Gal/L | Style | Includes | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Yellow Model | Red Model | Gray Model | White Model | CA Prop 65 |
|---------------------|------------|---|---|---------|------------------------|--------------|-----------|------------|-------------|------------|
| One - 55/200 | manual | Drum Support | 65 x 34 x 34 in 1651 x 864 x 864 mm | 1 | FM, N, O, A | 896200 | 896201 | 896203 | 896205 | |
| | self-close | | | | FM, N, O, A, I | 896220 | 896221 | 896223 | 896225 | ⚠ |
| Two - 55/200* | manual | | 65 x 59 x 34 in 1651 x 1498 x 864 mm | | N, O, A | 899100 | 899101 | 899103 | 899105 | |
| | self-close | | | | N, O, A, I | 899120 | — | — | — | ⚠ |
| One - 55/200 | manual | Drum Rollers | 65 x 34 x 34 in 1651 x 864 x 864 mm | | FM, N, O, A | 896260 | 896261 | 896263 | 896265 | |
| | self-close | | | | FM, N, O, A, I | 896270 | 896271 | 896273 | 896275 | ⚠ |
| Two - 55/200* | manual | | 65 x 59 x 34 in 1651 x 1498 x 864 mm | | N, O, A | 899160 | 899161 | 899163 | 899165 | |
| | self-close | | | | N, O, A, I | 899170 | — | — | — | |
| Two - 30/220 | manual | 65 x 43 x 34 in 1651 x 1092 x 864 mm | FM, N, O, A | 899060 | 899061 | 899063 | 899065 | | | |
| | self-close | | FM, N, O, A, I | 899070 | 899071 | 899073 | 899075 | ⚠ | | |

*OSHA 29CFR 1910.106(d)(3) states that not more than 60 gallons (227L) of Category 1, 2, or 3 flammable liquids, nor more than 120 gallons (454L) of Category 4 flammable liquids may be stored in a safety cabinet.

Sure-Grip® EX Double-Duty Drum Safety Cabinets

- Two separate compartments fit one vertical 55- or 30-gallon (200- or 110-L) drum and up to twelve 5-gallon (19-L) safety cans
- Fully compliant, fire resistant design with three-point, self-latching doors
- Drum area features drum rollers in the sump and one half-depth SpillSlope® shelf
- Can area includes two full-size, adjustable SpillSlope® shelves



| Capacity Gal/L | Doors and Style | Exterior H x W x D | Approv/Lstg Regulation | Model |
|----------------|---------------------------------|--|------------------------|--------|
| 115/435* | 2 door, manual with rollers | 65 x 59 x 34 in (1651 x 1499 x 864 mm) | N, O, A | 899260 |
| | 2 door, self-close with rollers | | N, O, A, I | 899270 |

*OSHA 29CFR 1910.106(d)(3) states that not more than 60 gallons (227 L) of Category 1, 2, or 3 flammable liquids, nor more than 120 gallons (454 L) of Category 4 flammable liquids may be stored in a safety cabinet.

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Sure-Grip® EX Horizontal Drum Safety Cabinet

- Fire tested and approved by FM Approvals; 18-gauge (1-mm) double-wall, welded steel
- Holds a horizontally stored 55-gallon (200-L) drum for use in gravity-flow dispensing applications
- Interior provides space for a drip-can and includes tracks to guide drum cradle (sold separately below) into position
- Powder-coat finish, inside and out
- Leakproof, 2-in (51-mm) sump, dual vents with flame arresters
- Built-in grounding connector



899320 (shown with optional cradle 08800)



Use proper grounding techniques when dispensing flammable liquids

| Drum Capacity Gal/L | Doors and Style | Exterior H x W x D | Approv/Lstg Regulation | Model | CA Prop 65 |
|---------------------|--------------------|--|------------------------|--------|------------|
| One - 55/200 | 2 door, manual | 50 x 30 x 48 in (1270 x 762 x 1219 mm) | FM, N, O, A | 899300 | |
| | 2 door, self-close | | FM, N, O, A, I | 899320 | ⚠ |

Accessories for Drum Cabinets

- **Cabinet ramp** easily loads a drum into a cabinet using a cart. Ramp fits over the sill to keep securely in place. Tread design on surface maximizes traction. Fits all styles of Justrite drum cabinets. Uniform distributed load limit is 750-lb (340-kg). Not for use with wheeled drum cradle 08800.
- **Drum Roller** for vertical storage cabinet 8962001 (sold separately above) makes it easier to maneuver heavy drums.
- **Wheeled drum cradle** positions a horizontal drum for gravity-flow dispensing.



Ramp side rails provide strength and guidance



08800

| Description | Fits Cabinet sizes/UDL | W x D | Model |
|------------------------------------|---|--------------------------------|-------|
| SpillSlope® half-depth steel shelf | Single vertical 55-gallon (200 L) drum and double-duty 115 gallon (435 L) | 30.375 x 14 in (771 x 356 mm) | 29946 |
| SpillSlope® steel shelf | Double-duty 115 gallon (435 L) | 23 x 29 in (584 x 737 mm) | 29974 |
| SpillSlope® half-depth steel shelf | Double vertical 55 gallon (200 L) drum | 55.375 x 14 in (1406 x 356 mm) | 29947 |
| Drum roller | Single vertical 55 gallon (200 L) drum, UDL 1250 lbs | 29.5 x 30 in (749 x 762 mm) | 25920 |
| | Double vertical 55 gallon (200 L) drum, UDL 2000 lbs | 55.5 x 30 in (1408 x 762 mm) | 25922 |
| | Double vertical 30 gallon (114 L) drum, UDL 1250 lbs | 37 x 30 in (940 x 762 mm) | 25923 |
| Drum ramp for all drum cabinets | All drum cabinets, UDL 750 lbs | 28 x 24.5 in (711 x 622 mm) | 25932 |
| Drum cradle for single drum | Single horizontal 55 gallon (200 L) drum, UDL 600 lbs | 22.5 x 35.5 in (571 x 902 mm) | 08800 |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Sure-Grip® EX Classic Safety Cabinets for Combustibles

Separate and identify combustible liquids for safe storage of paints and inks

- Fully compliant, fire tested and approved by FM Approvals
- Sturdy double-wall, 18-gauge (1-mm) steel with 1-1/2-in (38-mm) of insulating air space
- SpillSlope® safety shelves adjust to accept a variety of smaller paint tins and aerosol cans
- Leakproof, 2-in (51-mm) sump captures spills
- 3-point stainless steel bullet latching system for fail-safe closure
- Includes dual vents with flame arresters, adjustable leveling feet, grounding connector



894511

893011

| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Red Model | Yellow Model | CA Prop 65 |
|----------------|----------------------------|--|---------|------------------------|-----------|--------------|------------|
| 20/76 | 1 door, manual | 44 x 23.25 x 18 in (1118 x 591 x 457 mm) | 2 | FM, N, O, A | 891511 | 891510 | |
| | 1 door, self-close | | | FM, N, O, A, I | 891531 | 891530 | ⚠ |
| 40/151 | 2 door, manual | 44 x 43 x 18 in (1118 x 1092 x 457 mm) | 3 | FM, N, O, A | 893011 | 893010 | |
| | 2 door, self-close | | | FM, N, O, A, I | 893031 | 893030 | ⚠ |
| | 1 sliding door, self close | | | FM, N, O, A, I | 893091 | 893090 | ⚠ |
| 60/227 | 2 door, manual | 65 x 43 x 18 in (1651 x 1092 x 457 mm) | 5 | FM, N, O, A | 894511 | 894510 | |
| | 2 door, self-close | | | FM, N, O, A, I | 894531 | 894530 | ⚠ |
| | 1 sliding door, self-close | | | FM, N, O, A, I | 894591 | 894590 | ⚠ |
| 96/363* | 2 door, manual | 65 x 34 x 34 in (1651 x 864 x 864 mm) | 5 | FM, N, O, A | 896011 | 896010 | |
| | 2 door, self-close | | | FM, N, O, A, I | 896031 | 896030 | ⚠ |

*OSHA 29CFR 1910.106(d)(3) states that not more than 60 gallons (227 L) of Category 1, 2, or 3 flammable liquids, nor more than 120 gallons (454 L) of Category 4 flammable liquids may be stored in a safety cabinet.

| Accessories | Fits Cabinet Styles | W x D | Model |
|-------------------------|--|------------------------------------|-------|
| SpillSlope® steel shelf | 20 gallon (76 L) free standing - 23.25 in W (591 mm) | 19..625 x 14 in (498 x 356 mm) | 29936 |
| | Aerosol can wall mount - 43 in W (1092 mm) | 39..375 x 8.625 in (1000 x 219 mm) | 29938 |
| | 30 & 45 gallon (114 & 170 L) or 40 & 60 gallon (151 & 227 L) - 43 in W (1092 mm) | 39..375 x 14 in (1000 x 356 mm) | 29937 |
| | 60 gallon (227 L) or 96 gallon (363 L) - 34 in W (864 mm) | 30.375 x 29 in (771 x 737 mm) | 29944 |

Sure-Grip® EX Wall Mount Cabinet for Aerosol Cans

Store multiple aerosol cans on a wall near workspace for easy access

- Same safety features of Justrite's larger safety cabinets for combustibles
- Mounts on wall to save floor space—comes with mounting hardware
- Depth of 12-in (305-mm) with 3 shelves—holds over 100 aerosol cans

| Nom Capacity Aerosol Cans | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Model |
|---------------------------|-----------------|---|---------|------------------------|---------|
| 168 | 2 door, manual | 44 x 43 x 12 in 1118 x 1092 x 305 mm | 3 | FM, N, O, A | 8934016 |



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Sure-Grip® EX Classic Safety Cabinets for Pesticides

Store agricultural and turf chemicals in indoor maintenance areas of golf courses, parks, nurseries, farms, lawn and pest control companies

- Complies with OSHA and NFPA; FM-approved
- Powder-paint finish, inside and out
- Double-wall, 18-gauge (1-mm) steel with 3-point stainless steel bullet latching system
- Includes two keys—U-Loc™ handle accepts optional padlock for added security
- SpillSlope® steel shelves fitted with polyethylene tray adjust on 3-in (77-mm) centers
- Leakproof 2-in (51-mm) sump, dual vents with flame arresters, adjustable leveling feet, grounding connector
- Thirty-gallon (114-L) models 893004 and 893024 include an additional polyethylene work tray to place on top of the cabinet for a handy work surface



| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Model | CA Prop 65 | |
|----------------|----------------------------|---|----------------|------------------------|----------------|------------|---|
| 12/45 | 1 door, manual, compac | 35 x 23.25 x 18 in (889 x 591 x 457 mm) | 1 | FM, N, O, A | 891204 | | |
| | 1 door, self-close, compac | | | FM, N, O, A, I | 891224 | ⚠ | |
| 30/114 | 2 door, manual | 44 x 43 x 18 in (1118 x 1092 x 457 mm) | | FM, N, O, A | 893004 | | |
| | 2 door, self-close | | | FM, N, O, A, I | 893024 | ⚠ | |
| 45/170 | 2 door, manual | 65 x 43 x 18 in (1651 x 1092 x 457 mm) | | 2 | FM, N, O, A | 894504 | |
| | 2 door, self-close | | | | FM, N, O, A, I | 894524 | ⚠ |
| 60/227 | 2 door, manual | 65 x 34 x 34 in (1651 x 864 x 864 mm) | FM, N, O, A | | 896004 | | |
| | 2 door, self-close | | FM, N, O, A, I | | 896024 | ⚠ | |
| 90/341* | 2 door, manual | 65 x 43 x 34 in (1651 x 1092 x 864 mm) | FM, N, O, A | | 899004 | | |
| | 2 door, self-close | | FM, N, O, A, I | | 899024 | ⚠ | |

*OSHA 29CFR 1910.106(d)(3) states that not more than 60 gallons (227 L) of Category 1, 2, or 3 flammable liquids, nor more than 120 gallons (454 L) of Category 4 flammable liquids may be stored in a safety cabinet.

| Accessories | Fits Cabinet Styles | W x D | Shelf & Tray Model | Shelf Only Model | Tray Only Model |
|-------------------------|--|--------------------------------|--------------------|------------------|-----------------|
| SpillSlope® steel shelf | 12 gallon (45 L) compac | 19.625 x 14 in (498 x 356 mm) | 29959 | 29936 | 29968 |
| | 30 & 45 gallon (114 & 170 L) - 43 in W (1092 mm) | 39.375 x 14 in (1000 x 356 mm) | 29958 | 29937 | 29962 |
| | 60 gallon (227 L) - 34 in W (864 mm) | 30.375 x 29 in (771 x 737 mm) | 29980 | 29944 | 29961 |
| | 90 gallon (341 L) - 43 in W (1092 mm) | 39.375 x 29 in (1000 x 737 mm) | — | 29945 | 29972 |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Safety Cabinets for Hazardous Materials

Identify and safely store hazardous materials such as acids, bases, oxidizers, or toxic materials

- Application specific-labels identify contents to safely store and segregate incompatible chemicals
- Double-wall, 18-gauge (1-mm) steel with 1-1/2-in (38-mm) air space; 2-in (52-mm) leakproof sump
- Self-closing door(s) with a 3-point, stainless steel bullet latching system self-latch and self-close
- Fusible link on door(s) melt at 165 F (74 C) for automatic closure under fire conditions
- SpillSlope® adjustable, steel shelves fitted with polyethylene trays for chemical resistance against leaks. Polyethylene liner included for bottom of sump.
- 30-gal (114-L) cabinet includes an extra polyethylene work tray that can be placed on top of cabinet for a handy work surface



Segregate and identify hazardous materials to ensure a safe working environment.



Self-closing mechanism provides obstruction-free access to top shelf space.



| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Model | CA Prop 65 |
|------------------------------------|--------------------|--|---------|------------------------|--------|------------|
| Classic Safety Cabinets | | | | | | |
| 30/114 | 2 door, self-close | 44 x 43 x 18 in (1118 x 1092 x 457 mm) | 1 | FM, H, A, I | 863028 | ⚠ |
| 45/170 | | 65 x 43 x 18 in (1651 x 1092 x 457 mm) | 2 | | 864528 | ⚠ |
| 60/227 | | 65 x 34 x 34 in (1651 x 864 x 864 mm) | | | 866028 | ⚠ |
| 90/341 | | 65 x 43 x 34 in (1651 x 1092 x 864 mm) | | | 869028 | ⚠ |
| Countertop Safety Cabinet | | | | | | |
| 4/15 | 1 door, self-close | 22 x 17 x 17 in (559 x 432 x 432 mm) | 1 | H, A, I | 860428 | ⚠ |
| Compac Safety Cabinets | | | | | | |
| 12/45 | 1 door, self-close | 35 x 23.25 x 18 in (889 x 591 x 457 mm) | 1 | FM, H, A, I | 861228 | ⚠ |
| 15/57 | | 44 x 23.25 x 18 in (1118 x 591 x 457 mm) | | | 861528 | ⚠ |
| Piggyback Safety Cabinets | | | | | | |
| 12/45 | 2 door, self-close | 18 x 43 x 18 in (457 x 1092 x 457 mm) | 0 | FM, H, A, I | 861328 | ⚠ |
| 17/64 | | 24 x 43 x 18 in (610 x 1092 x 457 mm) | 1 | | 861728 | ⚠ |
| Slimline Safety Cabinets | | | | | | |
| 22/83 (standard) | 1 door, self-close | 65 x 23.25 x 18 in (1651 x 591 x 457 mm) | 3 | FM, H, A, I | 862228 | ⚠ |
| 54/204 (deep) | | 65 x 23.25 x 34 in (1651 x 591 x 864 mm) | | | 865428 | ⚠ |
| Undercounter Safety Cabinet | | | | | | |
| 22/83 | 2 door, self-close | 35 x 35 x 22 in (889 x 889 x 559 mm) | 1 | FM, H, A, I | 862328 | ⚠ |

Accessories - For extra shelves, see page 30.

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

ChemCor® Lined Safety Cabinets for Hazardous Materials

Seamless ChemCor® finish protects interior cabinet surfaces from rust and corrosion

- All the same high-performance features of Justrite's Hazardous Material Cabinets with added protection against corrosion from drips and off-gassing from harsh chemicals
- Unique, flame-coated thermoplastic finish on interior doors, shelves, walls, ceiling and sump
- Non-porous, seam-free surface eliminates the need for corrosion-prone rivets or fasteners
- Resists staining and cleans up easily
- 30-gal (114-L) cabinet includes a polyethylene work tray for positioning on top of cabinet as a handy work surface



Label pack includes ten content specific labels.



| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Model | CA Prop 65 |
|------------------------------------|--------------------|--|---------|------------------------|---------|------------|
| Classic Safety Cabinets | | | | | | |
| 30/114 | 2 door, self-close | 44 x 43 x 18 in (1118 x 1092 x 457 mm) | 1 | FM, H, A, I | 8630282 | ⚠ |
| 45/170 | | 65 x 43 x 18 in (1651 x 1092 x 457 mm) | 2 | | 8645282 | ⚠ |
| 60/227 | | 65 x 34 x 34 in (1651 x 864 x 864 mm) | | | 8660282 | ⚠ |
| Countertop Safety Cabinet | | | | | | |
| 4/15 | 1 door, self-close | 22 x 17 x 17 in (559 x 432 x 432 mm) | 1 | H, A, I | 8604282 | ⚠ |
| Compac Safety Cabinets | | | | | | |
| 12/45 | 1 door, self-close | 35 x 23.25 x 18 in (889 x 591 x 457 mm) | 1 | FM, H, A, I | 8612282 | ⚠ |
| Piggyback Safety Cabinets | | | | | | |
| 12/45 | 2 door, self-close | 18 x 43 x 18 in (457 x 1092 x 457 mm) | 0 | FM, H, A, I | 8613282 | ⚠ |
| 17/64 | | 24 x 43 x 18 in (610 x 1092 x 457 mm) | 1 | | 8617282 | ⚠ |
| Slimline Safety Cabinets | | | | | | |
| 22/83 (standard) | 1 door, self-close | 65 x 23.25 x 18 in (1651 x 591 x 457 mm) | 3 | FM, H, A, I | 8622282 | ⚠ |
| Undercounter Safety Cabinet | | | | | | |
| 22/83 | 2 door, self-close | 35 x 35 x 22 in (889 x 889 x 559 mm) | 1 | FM, H, A, I | 8623282 | ⚠ |

Accessories - For extra shelves, see page 30.

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Sure-Grip® EX Classic Safety Cabinets for Corrosives

Protect personnel and laboratories from damaging chemicals by storing corrosives in specially designed safety cabinets

- Independently fire tested and approved by FM Approvals
- Powder-coat paint finish, inside and out
- Same fire-resistant design as Justrite cabinets for flammable storage
- Leakproof 2-in (51-mm) sump, dual vents with flame arresters, adjustable leveling feet, grounding connector
- Polyethylene trays fit over galvanized steel SpillSlope® shelves to help resist aggressive chemicals
- Polyethylene liner at bottom of sump removes for easy cleaning of drips and leaks
- Thirty-gal (114-L) models include an additional polyethylene work tray to place on top of the cabinet for a handy work surface



894502



893002



Safely store corrosives in fire-resistant steel safety cabinets.

| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Model | CA Prop 65 |
|----------------|------------------------------------|--|---------|------------------------|--------|------------|
| 30/114 | 2 door, manual | 44 x 43 x 18 in (1118 x 1092 x 457 mm) | 1 | FM, A9 | 893002 | |
| | 2 door, self-close | | | | 893022 | ⚠ |
| | 1 bi-fold sliding door, self-close | | | | 893082 | ⚠ |
| | 2 door, manual | | | | 893302 | |
| 45/170 | 2 door, manual | 65 x 43 x 18 in (1651 x 1092 x 457 mm) | | | 894502 | |
| | 2 door, self-close | | | | 894522 | ⚠ |
| | 1 bi-fold sliding door, self-close | | | | 894582 | ⚠ |
| 60/227 | 2 door, manual | 65 x 34 x 34 in (1651 x 864 x 864 mm) | 2 | FM, A9 | 896002 | |
| | 2 door, self-close | | | | 896022 | ⚠ |
| | 1 bi-fold sliding door, self-close | | | | 896082 | ⚠ |
| 90/341 | 2 door, manual | 65 x 43 x 34 in (1651 x 1092 x 864 mm) | | | 899002 | |
| | 2 door, self-close | | | | 899022 | ⚠ |
| | 1 bi-fold sliding door, self-close | | | | 899082 | ⚠ |

Accessories - For extra shelves, see page 30.

⚠ **WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Sure-Grip® EX Slimline Safety Cabinets for Corrosives

Compact footprint offers versatile storage options

- Same safety features as Justrite's larger corrosive safety cabinets, in a footprint that fits the tightest spaces
- Independently fire tested and approved by FM Approvals
- Modular size fits nicely alongside existing safety cabinets to expand storage capacity
- Includes polyethylene trays that fit on top of three galvanized steel SpillSlope® safety shelves



| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Model | CA Prop 65 |
|------------------|--------------------|--|---------|------------------------|--------|------------|
| 22/83 (standard) | 1 door, manual | 65 x 23.25 x 18 in (1651 x 591 x 457 mm) | 3 | FM, A9 | 892202 | |
| | 1 door, self-close | | | FM, A9 | 892222 | ⚠ |
| 54/204 (deep) | 1 door, manual | 65 x 23.25 x 34 in (1651 x 591 x 864 mm) | | FM, A9 | 895402 | |
| | 1 door, self-close | | | FM, A9 | 895422 | ⚠ |

Sure-Grip® EX Countertop and Compac Safety Cabinets for Corrosives

Make the most of your available space

- Keep your most frequently used fluids close at hand
- Same safety features as Justrite's larger size corrosive safety cabinet, for use on countertop or free-standing for smaller quantities of corrosives
- Baked-on blue epoxy powder-coat finish to resist acids, bases, and solvents
- Steel shelves include polyethylene liner and a separate polyethylene liner at bottom sump that removes for easy cleaning



| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Model | CA Prop 65 |
|----------------|--------------------------------|--|---------|------------------------|--------|------------|
| 4/15 | 1 door, manual, countertop | 22 x 17 x 17 in (559 x 432 x 432 mm) | 1 | A9 | 890402 | |
| | 1 door, self-close, countertop | | | A9 | 890422 | ⚠ |
| 12/45 | 1 door, manual, compac | 35 x 23.25 x 18 in (889 x 591 x 457 mm) | | FM, A9 | 891202 | |
| | 1 door, self-close, compac | | | FM, A9 | 891222 | ⚠ |
| 15/57 | compac; 1 door manual | 44 x 23.25 x 18 in (1118 x 591 x 457 mm) | FM, A9 | 891502 | | |
| | compac; 1 door self-close | | FM, A9 | 891522 | ⚠ | |

Accessories - For extra shelves, see page 30.

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Sure-Grip® EX Piggyback Safety Cabinets for Corrosives

Use on bench tops or add to taller cabinets to meet increased storage need

- Safely store acids or bases without taking up additional floor space—fits on top of 30- and 45-gallon (114- and 170-L) manual or self-closing Sure-Grip® EX cabinets
- Compact design permits stacking of piggyback cabinets, or use optional wall hanger assembly No. 25950 to mount cabinet to wall
- Complies with OSHA and NFPA; FM-approved
- Double-wall, 18-gauge (1-mm) steel with 3-point stainless steel bullet latching system
- Leakproof 2-in 51-mm) sump, dual vents with flame arresters, adjustable leveling feet, grounding connector



Expand storage capacity by mounting piggyback cabinet on top of Justrite's 30- or 45-gallon cabinet.



891702 stacked



891722



891302

| Capacity Gal/L | Doors and Style | Exterior H x W x D | Adjustable Shelves | Approv/Lstg Regulation | Model | CA Prop 65 |
|----------------|--------------------|---------------------------------------|--------------------|------------------------|--------|------------|
| 12/45 | 2 door, manual | 18 x 43 x 18 in (457 x 1092 x 457 mm) | 0 | FM, A9 | 891302 | |
| | 2 door, self-close | | | | 891322 | ⚠ |
| 17/64 | 2 door, manual | 24 x 43 x 18 in (610 x 1092 x 457 mm) | 1 | | 891702 | |
| | 2 door, self-close | | | | 891722 | ⚠ |

Accessories—see page 36.

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Sure-Grip® EX Undercounter Safety Cabinets for Corrosives

Safely store corrosives near point-of-use under lab counters for quick and easy access

- Powder-coat finish—inside and out for chemical resistance
- Fire-tested and approved by FM Approvals
- Same benefits as Justrite’s flammable storage cabinets— with the addition of polyethylene trays on top of galvanized SpillSlope® steel shelves for added resistance against damaging corrosive drips and leaks
- Leakproof 2-in (51-mm) sump includes a polyethylene sump liner that removes for easy cleaning
- Toe kick offers improved ergonomics allowing user to stand closer to counter—less leaning




Self-latching doors include paddle handle with cylinder lock.

| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Model | CA Prop 65 |
|----------------|--------------------|--------------------------------------|---------|------------------------|--------|------------|
| 22/83 | 2 door, manual | 35 x 35 x 22 in (889 x 889 x 559 mm) | 1 | FM, A9 | 892302 | |
| | 2 door, self-close | | | FM, A9 | 892322 | ⚠ |

Accessories for dark blue hazardous material cabinets or light blue corrosive storage cabinets

- Galvanized steel shelves hold up to 350 lb (159 kg) and adjust on 3-in (76-mm) centers
- Polyethylene trays fit over steel shelves for added corrosion protection against leaks when storing damaging corrosive liquids
- Available options include: combination tray with poly tray, steel shelf alone, or poly tray alone
- Use optional wall hanger assembly on smaller cabinets when wall mounting is desirable—comes in two sizes

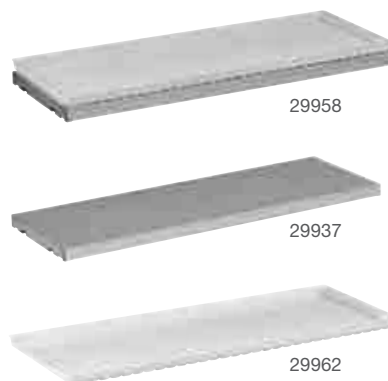

| Description | Fits Cabinet Styles | W x D | Shelf & Tray Model | Shelf Only Model | Tray Only Model |
|-------------------------|---|--------------------------------------|--------------------|------------------|-----------------|
| SpillSlope® steel shelf | 4 gallon (15 L) countertop | 13.375 x 13 in (340 x 330 mm) | 29973 | 29935 | 25934 |
| | 12 & 15 gallon (45 & 57 L) compact 22 gallon (83 L) slim | 19.625 x 14 in (498 x 356 mm) | 29959 | 29936 | 29968 |
| | 22 gallon (83 L) undercounter | 31.556 x 18 in (802 x 457 mm) | 29960 | 29939 | 29965 |
| | 17, 30 & 45 gallon (64, 114 & 170 L) - 43 in W (1092 mm) | 39.375 x 14 in (1000 x 356 mm) | 29958 | 29937 | 29962 |
| | 54 gallon (204 L) deep slimline | 19.625 x 29 in (498 x 737 mm) | — | 29941 | 29907 |
| | 60 gallon (227 L) - 34 in W (864 mm) | 30.375 x 29 in (771 x 737 mm) | 29980 | 29944 | 29961 |
| | 90 gallon (341 L) - 43 in W (1092 mm) | 39.375 x 29 in (1000 x 737 mm) | — | 29945 | 29972 |
| Wall mount kit | 4 gallon (15 L) countertop | — | 25951 | — | — |
| | 12 & 17 gallon (45 & 64 L) piggyback | | 25950 | | |
| Tray for cabinet top | 17, 30 & 45 gallon (64, 114 & 170 L) - 43 in W (1092 mm) | 43.5625 x 18.5625 in (1106 x 471 mm) | — | | 25933 |

| Description | W x D | Model |
|--|----------------------------------|-------|
| Label pack (replacement/retrofit) with "Hazardous—Keep Fire Away" warning and 10 content ID labels | — | 29017 |
| Single label: "Lithium-Ion Battery Storage Cabinet" | 12 in W x 3.5 in H (305 x 89 mm) | 29018 |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

ChemCor® Lined Safety Cabinets for Corrosives

100% seamless thermoplastic coating inside the cabinet provides superior corrosion protection combined with fire protection in a single cabinet

- Nonporous thermoplastic coating lines insides
- Specifically formulated powder-coat finish on exterior provides long life and extra resistance to deterioration from harsh chemicals
- Seam-free surfaces resists stains and clean easily
- Includes two labels to be placed on cabinet – “Base” or reflective Haz-Alert™ “Acid”
- Double-wall, 18-gauge (1-mm) steel with 3-point stainless steel bullet latching system
- Leakproof 2-in (51-mm) sump, dual vents with flame arresters, adjustable leveling feet, grounding connector



See next page for models in a variety of styles.



8831022



8837272



8849022

ChemCor® Lined Under Fume Hood Acid Cabinets

| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Approv/Lstg Regulation | Silver Model | Blue Model | Lt Neutral Model | CA Prop 65 |
|----------------|---------------------------------|---|---------|------------------------|--------------|------------|------------------|------------|
| 15/57 | 1 door, right hinge, manual | 35.75 x 24 x 21.625 in 908 x 610 x 549 mm | 1 | FM, A9 | 8825042 | 8825022 | 8825072 | |
| | 1 door, left hinge, manual | | | | 8825142 | 8825122 | 8825172 | |
| | 1 door, right hinge, self-close | | | | 8825242 | 8825222 | 8825272 | ▲ |
| | 1 door, left hinge, self-close | | | | 8825342 | 8825322 | 8825372 | ▲ |
| 19/72 | 2 door, manual | 35.75 x 30 x 21.625 in 908 x 762 x 549 mm | 1 | FM, A9 | 8831042 | 8831022 | 8831072 | |
| | 2 door, self-close | | | | 8831242 | 8831222 | 8831272 | ▲ |
| 23/87 | 2 door, manual | 35.75 x 36 x 21.625 in 908 x 914 x 549 mm | 1 | FM, A9 | 8837042 | 8837022 | 8837072 | |
| | 2 door, self-close | | | | 8837242 | 8837222 | 8837272 | ▲ |
| 31/117 | 2 door, manual | 35.75 x 48 x 21.625 in 908 x 1219 x 549 mm | 1 | FM, A9 | 8849042 | 8849022 | 8849072 | |
| | 2 door, self-close | | | | 8849242 | 8849222 | 8849272 | ▲ |

ChemCor® Lined Safety Cabinets for Corrosives



ChemCor® Lined Acid Cabinets - Free Standing

| Capacity Gal/L | Doors and Style | Exterior H x W x D | Shelves | Color | Approv/Lstg Regulation | Model | CA Prop 65 |
|--|--------------------------------|---|---------|-------|------------------------|---------|------------|
| 30/114 | 2 door, manual | 44 x 43 x 18 in 1118 x 1092 x 457 mm | 1 | Blue | FM, A9 | 8930022 | |
| | 2 door, self-close | | | | | 8930222 | ⚠ |
| | 1 bi-fold sliding, self-close | | | | | 8930822 | ⚠ |
| 45/170 | 2 door, manual | 65 x 43 x 18 in 1651 x 1092 x 457 mm | 2 | Blue | FM, A9 | 8945022 | |
| | 2 door, self-close | | | | | 8945222 | ⚠ |
| | 1 bi-fold sliding, self-close | | | | | 8945822 | ⚠ |
| 60/227 | 2 door, manual | 65 x 34 x 34 in 1651 x 864 x 864 mm | | | | 8960022 | |
| | 2 door, self-close | | | | | 8960222 | ⚠ |
| Slimline Safety Cabinets | | | | | | | |
| 22/83 | 1 door, manual | 65 x 23.25 x 18 in 1651 x 591 x 457 mm | 3 | Blue | FM, A9 | 8922022 | |
| | 1 door, self-close | | | | | 8922222 | ⚠ |
| Countertop and Compac Safety Cabinets | | | | | | | |
| 4/15 | 1 door, manual, countertop | 22 x 17 x 17 in 559 x 432 x 432 mm | 1 | Blue | A9 | 8904022 | |
| | 1 door, self-close, countertop | | | | | 8904222 | ⚠ |
| 12/45 | 1 door, manual, compac | 35 x 23.25 x 18 in 889 x 591 x 457 mm | | | FM, A9 | 8912022 | |
| | 1 door, self-close, compac | | | | | 8912222 | ⚠ |
| Undercounter Safety Cabinets | | | | | | | |
| 22/83 | 2 door, manual | 35 x 35 x 22 in 889 x 889 x 559 mm | 1 | Blue | FM, A9 | 8923022 | |
| | 2 door, self-close | | | | | 8923222 | ⚠ |
| Piggyback Safety Cabinets | | | | | | | |
| 12/45 | 2 door, manual | 18 x 43 x 18 in 457 x 1092 x 457 mm | 0 | Blue | FM, A9 | 8913022 | |
| | 2 door, self-close | | | | | 8913222 | ⚠ |
| 17/64 | 2 door, manual | 24 x 43 x 18 in 610 x 1092 x 457 mm | 1 | | | 8917022 | |
| | 2 door, self-close | | | | | 8917222 | ⚠ |

| Accessories | Fits Cabinet Styles | W x D | Model |
|----------------------------------|-----------------------------------|--------------------------------|-------|
| ChemCor® SpillSlope® steel shelf | 15 gallon (57 L) under fume hood | 20.125 x 18 in (511 x 457 mm) | 29934 |
| | 19 gallon (72 L) under fume hood | 26.125 x 18 in (664 x 457 mm) | 29930 |
| | 23 gallon (87 L) under fume hood | 32.5 x 18 in (826 x 457 mm) | 29940 |
| | 31 gallon (117 L) under fume hood | 44.333 x 18 in (1130 x 457 mm) | 29948 |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Polyethylene Cabinet for Corrosive Chemicals


Completely metal-free poly cabinet—never worry about rust again

- For strong acids such as hydrochloric, sulfuric, or nitric acid; or bases such as sodium, potassium, or calcium hydroxide
- Durable HDPE (high-density polyethylene) for chemical resistance
- Shelf adjusts on 3-in (76-mm) increments with a load capacity of 125-lbs (57-kgs)
- Removable sump cover serves as a bottom shelf, concealing the integrated, 8.5-gal (32-L capacity) leakproof sump
- Door accepts optional padlock
- Use for stand-alone storage for access to grooved top surface
- When used under a counter, recessed toe kick provides improved ergonomics
- Four pre-formed, rear vent locations provide a guide for an aftermarket vent kit (not included) if a pressurized vapor removal system is required
- Expand capacity by stacking two cabinets



Free-standing safe storage for harsh acids, or use undercounter for convenient access.

3 application specific labels provide for segregation of chemicals included on both cabinet styles.



| Description | Capacity | Doors | Exterior H x W x D | Shelves | Shelf Load lb/kg | Model |
|---|-------------------------------|--------|---|---------|------------------|-------|
| Stand-alone polyethylene cabinet | Thirty-six, 2.5-liter bottles | 2 door | 35 x 36 x 25 in (889 x 914 x 635 mm) | 1 | 125/57 | 24180 |
| Replacement polyethylene center shelf for 24180 | — | — | 33.375 W x 20.375 D in (848 W x 518 D mm) | — | 125/57 | 24103 |

Countertop Polyethylene Cabinet for Corrosives

- Point-of-use convenience for small quantities of acids or bases
- Completely metal-free—excellent chemical resistance against damaging spills or vapors
- Includes two poly shelves; use one inside to catch leaks, store the other under cabinet and remove for use as a worktop
- Hinge door from either side—accepts optional padlock



Compact design offers placement on lab counters for access to frequently used chemicals.

| Description | Capacity | Doors | Exterior H x W x D | Shelves | Shelf Load lb/kg | Model |
|---------------------------------|----------------------|--------|--|---------|------------------|-------|
| Countertop polyethylene cabinet | Two, 4-liter bottles | 1 door | 19.75 x 14.25 x 17.125 in (502 x 362 x 435 mm) | — | — | 24080 |

Wood Laminate Acid Cabinets

- Long lasting wood construction with stainless steel handles and hinges
- Shelf adjusts on 1-1/4-in (32-mm) centers
- Includes adjustable leg levelers, Haz-Alert™ reflective labels, and double key set
- Undercounter model 24140 includes a removable, easy-to-clean polyethylene work surface that is recessed 5/8-in (16-mm) to contain leaks



| Capacity | Number of Doors and Style | Exterior H x W x D | Shelves | Model |
|-------------------------------|---------------------------|--|---------|-------|
| Six, 2.5 liter bottles | 2 door, countertop | 18.5 x 24 x 16 in (470 x 610 x 406 mm) | 0 | 24120 |
| Thirty-six, 2.5 liter bottles | 2 door, stand alone | 35.75 x 36 x 22 in (908 x 914 x 559 mm) | 1 | 24140 |
| Forty-nine, 2.5 liter bottles | | 60 x 42 x 17.875 in (1524 x 1067 x 454 mm) | | 24150 |

24140 height dimension includes 0.75-in (19-mm) top. For undercounter usage, remove top for 22-in (559-mm) depth and adjust leg levelers which extend up to 0.75-in (19-mm).

| Accessories | Exterior W x D | Model |
|--------------------------------|--------------------------------|-------|
| Wood shelf and clips for 24140 | 34 x 16.875 in (864 x 429 mm) | 24168 |
| Wood shelf and clips for 24150 | 40 x 13.875 in (1016 x 352 mm) | 24167 |

Solid Polyethylene Acid Cabinets

- Suitable for highly aggressive liquids—no metal parts to corrode
- Leakproof 2-in (51-mm) sump
- Three-point door latch on larger units offer secure closure
- Shelf on larger units adjust on 3-in (76-mm) centers
- Door accepts optional padlock
- Toe kick on undercounter model offers improved ergonomics—less leaning



| Capacity | Doors and Style | Exterior H x W x D | Shelves | Model |
|-------------------------------|----------------------|--|---------|-------|
| Six, 2.5 liter bottles | 1 door, countertop | 22 x 17 x 17 in (559 x 432 x 432 mm) | – | 24004 |
| Thirty-six, 2.5-liter bottles | 2 door, undercounter | 35.75 x 36 x 21.75 in (908 x 914 x 552 mm) | 1 | 24010 |
| Thirty-six, 2.5-liter bottles | 2 door, stand alone | 36.75 x 36 x 21.75 in (933 x 914 x 552 mm) | | 24015 |

| Accessories | Fits Cabinet Sizes | W x D | Model |
|--|--------------------|--------------------------------|-------|
| Solid polyethylene shelf with shelf pegs | 36 in (914mm) W | 34.75 x 20.5 in (883 x 521 mm) | 24115 |

Document Storage Boxes

Keep your important papers readily available while protecting them from moisture and dirt

- Weather-resistant polyethylene storage boxes safely store manuals and documents
- Bright red color for visibility with smooth area that accepts ID label
- Label pack includes 2 blank labels and 2 printed labels (SDS and Instruction Manual)
- Includes heavy-duty double-sided tape for easy installation
- Large size accepts SDS binder; medium and large sized boxes accept padlock

Ideal for storage of safety data sheets, instruction sheets, receiving bills, evacuation plans, schedules, plant layouts, inventory checklists, operator manuals, emergency contacts, certificates, and medical records.



Double sided tape is provided for mounting on surfaces that should not be penetrated by hardware such as safety cabinets.



| Description | Approx Interior H x W x D | Exterior H x W x D | Lock Hole Dia | Single Unit Model | Master Carton Packs |
|--|---|---|----------------|-------------------|---------------------|
| Medium top opening | 11.5 x 8.75 x 1.625 in (292 x 222 x 41mm) | 12.5 x 10.25 x 2.25 in (318 x 260 x 57 mm) | 0.25 in/6 mm | S23303 | 23303 |
| Medium front opening | 12.25 x 8.625 x 1 in (311 x 219 x 25 mm) | 14.5 x 11 x 2.125 in (368 x 279 x 54 mm) | 0.375 in/10 mm | S23304 | 20 23304 |
| Tube twist-on lid | 12 x 3 dia in (305 x 76 dia mm) | 12.5 x 3.75 OD in (318 x 94 OD mm) | — | S23305 | 23305 |
| Large front opening | 13.25 x 10.75 x 2.25 in (337 x 273 x 57 mm) | 15.75 x 13.125 x 3.625 in (400 x 333 x 90 mm) | 0.375 in/10 mm | S23306 | 10 23306 |
| Label pack (4 yellow labels: 2 blank and 2 printed - SDS and instruction manual) | | | — | — | 20 23310 |

VaporTrap™ Safety Cabinet Filter

Improves your work environment by reducing employee's inhalation exposure to VOC's

- Reduce harmful volatile organic chemical vapors inside your safety cabinet
- Activated carbon filter medium contained in a stainless steel mesh cartridge adsorbs VOC vapors
- Magnetized base offers flexible placement anywhere within the cabinet
- Date notation area on label serves as a reminder for replacement—life cycle varies based upon vapor types and concentrations



For increased safety, position one or two VaporTrap™ Filters inside the cabinet.

Note: Due to variables such as the chemical itself, its purity, or its vapor pressure, temperature, humidity, charcoal age, etc., it is difficult to estimate VOC vapor adsorption rates. The Justrite VaporTrap™ Carbon Filter is not intended to be used as a substitute for using safe closed containers as required by OSHA and the EPA. It is important to clean up spills and residues from the cabinet and containers.

| Description | Nom. Dimensions Filter L x D | Model |
|---------------------------|------------------------------|-------|
| VaporTrap™ filter (2 pk.) | 8.75 x 2.25 in (222 x 57 mm) | 29916 |

Safety Cabinet Accessories

Accessories offer organization and convenience

Steel Shelf Dividers fit all Justrite cabinets with 14-in (355-mm) deep shelves. Simply place over shelf and slide into position as desired.

Seismic Bracket Kit provides increased stability—ideal for earthquake or hurricane prone areas. One kit secures any safety cabinet to a wall or floor. Because there are no holes created, the fire protection properties of the cabinet remain intact and the cabinet maintains FM approval.

Leg Riser Frame provides sturdy, stable support for easy relocation of empty cabinet with forklift or pallet jack. High leg frame makes it easy to clean underneath and keeps cabinet away from floor moisture. Includes leg levelers and safety warning label: “Forklift Only When Empty”.

Rolling Cart makes it easy to move a heavy safety cabinet—transport solvents and chemicals directly to your work area. All welded 1/8-in (3-mm) thick heavy-duty steel and 5-in (127-mm) poly caster wheels with brakes for added safety. Push handle is removable. Fits any cabinet 43-in W x 18-in D (1092-mm x 457-mm) with a maximum height of 44-in (1118-mm).



29985 - Set of 4



84000



84001



84002

| Description | Load Capacity lb/kg | H x W x D | Model |
|--|---------------------|---|-------|
| Shelf dividers for 30G/114L, 40G/151L, 45G/170L, 12G/45L & 15G/57L compac, 22G/83L slimline and 17G/64L piggyback | — | 2 x 2.031 x 14.171 in (51 x 52 x 360 mm) | 29985 |
| Shelf dividers for 22G/83L undercounter | — | 2 x 2.031 x 18.171 in (51 x 52 x 462 mm) | 29990 |
| Leg riser frame for 30G/114L and 45G/170L and fume hood cabinets 19G/72L, 23G/87L, 31G/117L | 1000/454 | 5.25 x 43.75 x 18.75 in (133 x 1111 x 476 mm) | 84002 |
| Rolling cart for 30G/114L and piggyback style | 500/227 | 42 x 43.25 x 18.25 in (1066 x 1099 x 464 mm) | 84001 |
| Seismic bracket kit fits all cabinet sizes | — | 4 x 48 x 4 in (102 x 1219 x 102 mm) | 84000 |

Safety Cans & Containers

Trusted



Why do I need a safety can?

Almost every place of business has occasion to use flammable liquids such as fuels, chemicals, and solvents. Whereas these liquids are relatively commonplace, it's important to understand the dangers they may present. For example, one gallon of vaporized gasoline can explode with the same force as twenty sticks of dynamite. Safety containers protect workers by minimizing the risk of accidents and fires when handling hazardous liquids.

Safety cans serve critical functions:

- Reduce the risk of fire and explosion when pouring and storing flammable liquids
- Provide compliance with federal OSHA regulations and fire codes
- Improve efficiency with ease-of-use features which enhance pouring and filling operations

Approval and Compliance


Approved by, or meet, at least one or more of the following:

- FM Approvals
- Underwriters Laboratories
- TÜV Technical Inspection Association
- OSHA 1910.106
- National Fire Protection Association (NFPA) Code 30
- UN/D.O.T. 49 CFR parts 100 to 185
- National Fire Code of Canada
- NFPA Fire Code 1
- International Fire Code (IFC)
- California Air Resources Board (CARB) Title 13



Types of Safety Containers

- Type I and Type II steel safety cans
- D.O.T. (Department of Transportation) safety cans
- Polyethylene safety cans
- Laboratory safety cans
- Quick-disconnect safety disposal cans
- Liquid disposal safety cans
- Oily waste cans
- Plunger and bench cans
- Dip, wash, and rinse tanks

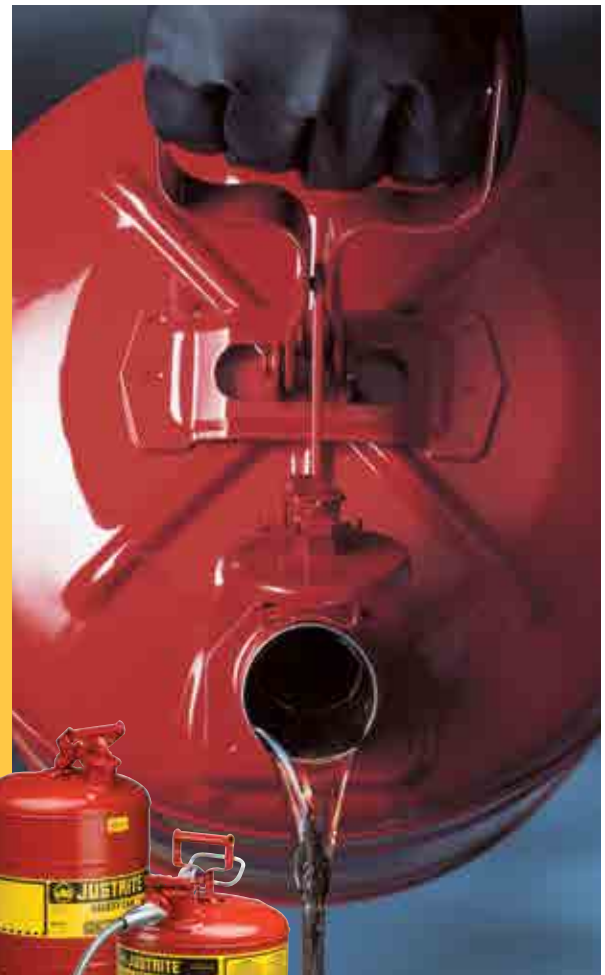

Safety in a Can!



Exclusive, vented Type II AccuFlow™ manifold with a Safe Squeeze® trigger handle provides the fastest smoothest, most controlled pouring. Patented.



Flexible 9-in (229-mm) hose on Type II AccuFlow™ offers targeted pouring into small openings.



Quick-fill port on Type II AccuFlow™ features an ergonomically designed lift lever that opens wide for easy filling.



Extra capacity in all cans accommodates oil additives for two cycle engines.



1/2-in (13-mm) grip lip along bottom supports pouring and resists accidental punctures when placed on uneven surfaces.



Stainless steel flame arrester stops flashback ignition. Long 3-1/2-in (88-mm) length offer safe secure insertion of gas nozzle.



Optional 2-position polypropylene funnel for Type I cans aids in pouring and folds down for compact storage and filling.



Large ID zone permits user labeling to avoid misuse, mishaps with incompatible mixtures, or to identify owner or department.

Comfortable, rounded handle doesn't cut into hand.

Leakproof, positive pressure relief lid automatically vents to prevent rupture or explosion. It is spring-loaded to self-close controlling vapors and spills.

Trilingual warning label

Free swinging handle with counter-balanced design leverages the weight of the can against the opening mechanism for easy pouring and carrying.


Reinforcing ribs strengthen walls to resist denting or implosion.

Double lock seams at base and top offer four thicknesses of steel for extra "bumper guard" protection.

24-gauge galvanized steel body and handle finished in an environmentally friendly, tough powder-coat finish resists solvents and stands up to abuse.

100% leak tested

Fully compliant—meets OSHA and NFPA

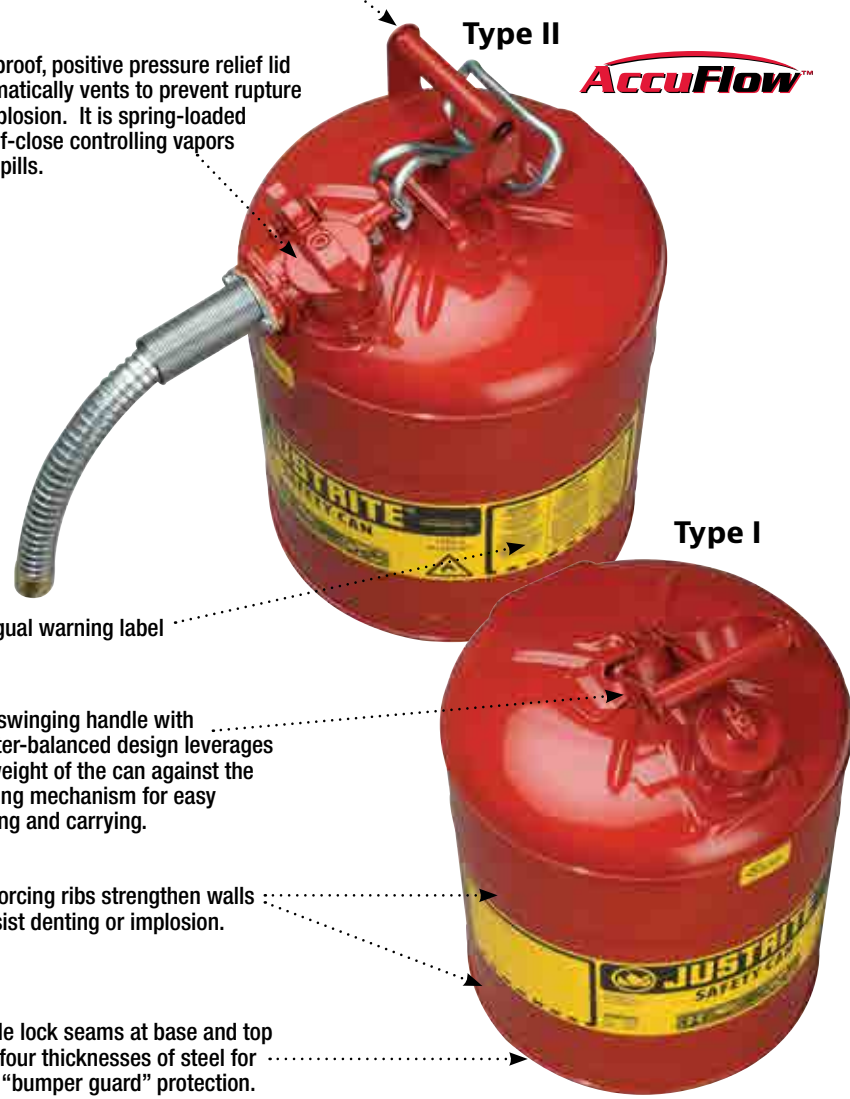

Type II



Type I

Type I Safety Cans

Protect workers and reduce fire risks by transferring, storing and dispensing flammable liquids in OSHA-approved, single-spout Type I safety cans

- Self-closing, leakproof lid protects vapors from escaping and guards against spills
- Positive-pressure relief cap automatically vents can to guard against rupture or explosion
- Stainless steel flame arrestor dissipates heat to stop flashback ignition
- Guaranteed 100% leakproof construction
- Large label ID zone on swing-handle cans provides writing space to identify contents
- Trigger-release handle on cans up to 1-quart (1-L)
- Swinging handles on cans 1-gallon or larger help carry heavier loads
- Tough powder-coat finish resists chemicals.



Swinging, full-fisted rounded handle eases carrying.

Type I Safety Can Funnel

- Polypropylene funnel for sizes 1-gallon (4-L) and larger
- Two positions: folds down for filling, stays up when pouring
- Big bowl protects against splashes



Convenient hinged design allows you to fill the can without removing the funnel.



7150100

7125100

7120100

7110100

10001

10101

10301

| Description and Capacity | Dimensions OD x H | Approv/Lstg Regulation | Red Can Model | Red Can with Funnel* Model |
|--|----------------------------------|---------------------------|------------------|-------------------------------|
| Trigger Handle Type I Safety Cans | | | | |
| 1 pint (0.5 L) steel safety can | 4.812 x 6.75 in (122 x 172 mm) | FM, UL/ULC, TÜV | 10001 | — |
| 1 quart (1 L) steel safety can | 4.812 x 8.25 in (122 x 210 mm) | | 10101 | |
| 1 gallon (4 L) steel safety can | 7.25 x 11.5 in (184 x 292 mm) | FM, UL/ULC | 10301 | |
| Swinging Handle Type I Safety Cans | | | | |
| 1 gallon (4 L) steel safety can | 9.5 x 11 in (241 x 279 mm) | FM, UL/ULC, TÜV | 7110100 | 7110110 |
| 2 gallon (7.5 L) steel safety can | 9.5 x 13.75 in (241 x 349 mm) | | 7120100 | 7120110 |
| 2.5 gallon (9.5 L) steel safety can | 11.75 x 11.5 in (298 x 292 mm) | | 7125100 | 7125110 |
| 5 gallon (19 L) steel safety can | 11.75 x 16.875 in (298 x 429 mm) | | 7150100 | 7150110 |
| Polypropylene funnel for 1 gallon (4L) and larger | 0.5 x 11.25 in (13 x 286 mm) | — | 11202Y | — |
| Bolt-on funnel with galvanized hose for 1 gallon (4L) and larger | 1 x 14 in (25 x 356 mm) | | 11089 | |

* Approvals apply to safety can only, not funnel.

Type I Safety Cans – Optional Colors

Enjoy the same benefits found in Justrite’s red Type I cans, in 3 other colors for color-coding convenience

- Differentiate different types of liquids and avoid accidental equipment damage
- Identify, organize and segregate incompatible liquids
- Quick visual reference for workers
- Typical industry convention is:
 - Red for gasoline □ Blue for kerosene
 - Yellow for diesel □ Green for oil
- Certified by FM Approvals, UL/ULC, and TÜV; meet OSHA and NFPA requirements

Safety Can with Funnel Value Package

Cost-saving combination pack includes can with funnel conveniently packed in one carton

- More convenient when pouring into small openings
- Two-position funnel - folds down when filling or storing, stays up when pouring



Funnel makes it easy to pour into small openings.



7150300, 7150400, 7150200

7125210

| Description and Capacity | Dimensions OD x H | Approv/Lstg Regulation | Yellow Can Model | Yellow Can with Funnel* Model | Blue Can Model | Blue Can with Funnel* Model | Green Can Model | Green Can with Funnel* Model |
|---|----------------------------------|---------------------------|---------------------|-------------------------------------|-------------------|-----------------------------------|--------------------|------------------------------------|
| Trigger Handle Type I Safety Cans | | | | | | | | |
| 1 pint (0.5 L) steel safety can | 4.812 x 6.75 in (122 x 172 mm) | FM, UL/ULC, TÜV | 10011 | — | — | — | — | — |
| 1 quart (1 L) steel safety can | 4.812 x 8.25 in (122 x 210 mm) | | 10111 | — | — | — | — | |
| Swinging Handle Type I Safety Cans | | | | | | | | |
| 1 gallon (4 L) steel safety can | 9.5 x 11 in (241 x 279 mm) | FM, UL/ULC, TÜV | 7110200 | 7110210 | 7110300 | 7110310 | 7110400 | 7110410 |
| 2 gallon (7.5 L) steel safety can | 9.5 x 13.75 in (241 x 349 mm) | | 7120200 | 7120210 | 7120300 | 7120310 | 7120400 | 7120410 |
| 2.5 gallon (9.5 L) steel safety can | 11.75 x 11.5 in (298 x 292 mm) | | 7125200 | 7125210 | 7125300 | 7125310 | 7125400 | 7125410 |
| 5 gallon (19 L) steel safety can | 11.75 x 16.875 in (298 x 429 mm) | | 7150200 | 7150210 | 7150300 | 7150310 | 7150400 | 7150410 |

* Approvals apply to safety can only, not funnel.

42 Safety Cans & Containers



Type II AccuFlow™ Safety Cans

Go beyond protection and compliance with the added convenience of AccuFlow™ with Safe-Squeeze® trigger for safe and controlled pouring

- Vented design provides smooth, slug-free liquid flow
- Flexible 9-in (229-mm) long metal hose helps control the pour into small openings
- Stainless steel flame arrester prevents flashback ignition
- Two-openings – one for targeted pouring, one with ergonomically designed lift-lever for easy filling
- Sealed lid features automatic positive-pressure relief to protect against explosion
- Large label ID zone provides writing space to identify contents, department location, or individual user name
- Tough powder-coat finish resists chemicals
- Certified by FM Approvals, UL/ULC, and TÜV; meet OSHA and NFPA requirements



| Description and Capacity | Hose OD x L | Can OD x H | Approv/Lstg Regulation | Red Can Model |
|---|--------------------------------|--------------------------------|------------------------|---------------|
| 1 gallon (4 L) steel safety can with hose | 0.625 x 9 in (16 x 229 mm) | 9.5 x 10.5 in (241 x 267 mm) | FM, UL/ULC, TÜV | 7210120 |
| 2 gallon (7.5 L) steel safety can with hose | | 9.5 x 13.25 in (241 x 337 mm) | | 7220120 |
| 2.5 gallon (9.5 L) steel safety can with hose | | 11.75 x 12 in (298 x 305 mm) | | 7225120 |
| 5 gallon (19 L) steel safety can with hose | 11.75 x 17.5 in (298 x 445 mm) | 7250120 | | |
| 2.5 gallon (9.5 L) steel safety can with hose | 1 x 9 in (25 x 229 mm) | 11.75 x 12 in (298 x 305 mm) | | 7225130 |
| 5 gallon (19 L) steel safety can with hose | | 11.75 x 17.5 in (298 x 445 mm) | | 7250130 |

Type II AccuFlow™ Safety Cans – Optional Colors

Enjoy the same safety features found in Justrite's red AccuFlow™ cans, in 3 additional colors for color-coding convenience

- Differentiate different types of liquids and avoid accidental equipment damage
- Identify, organize and segregate incompatible liquids
- Quick visual reference for workers
- Typical industry convention is:
 - Red for gasoline □ Blue for kerosene
 - Yellow for diesel □ Green for oil
- Certified by FM Approvals, UL/ULC, and TÜV; meet OSHA and NFPA requirements



Safe-Squeeze® trigger on AccuFlow™ safety can provides finger tip control when filling up equipment.



7250230

AccuFlow™



7225330



7210420

| Description and Capacity | Hose OD x L | Can OD x H | Approv/Lstg Regulation | Yellow Can Model | Blue Can Model | Green Can Model |
|---|--------------------------------|--------------------------------|------------------------|------------------|----------------|-----------------|
| 1 gallon (4 L) steel safety can with hose | 0.625 x 9 in 16 x 229 mm | 9.5 x 10.5 in (241 x 267 mm) | FM, UL/ULC, TÜV | 7210220 | 7210320 | 7210420 |
| 2 gallon (7.5 L) steel safety can with hose | | 9.5 x 13.25 in (241 x 337 mm) | | 7220220 | 7220320 | 7220420 |
| 2.5 gallon (9.5 L) steel safety can with hose | | 11.75 x 12 in (298 x 305 mm) | | 7225220 | 7225320 | 7225420 |
| 5 gallon (19 L) steel safety can with hose | 11.75 x 17.5 in (298 x 445 mm) | 7250220 | | 7250320 | 7250420 | |
| 2.5 gallon (9.5 L) steel safety can with hose | 1 x 9 in 25 x 229mm | 11.75 x 12 in (298 x 305 mm) | | 7225230 | 7225330 | 7225430 |
| 5 gallon (19 L) steel safety can with hose | | 11.75 x 17.5 in (298 x 445 mm) | | 7250230 | 7250330 | 7250430 |



Type II AccuFlow™ Transport and Dispensing Cans

Provides D.O.T. compliant travel mode for over-the-road transport of flammable liquids and FM-approved usage mode for on-site fuel dispensing

- Heavy-duty roll-bars protect the spout from damage to prevent dangerous fuel spillage during transport
- Usage mode for on-site fuel dispensing
- Eliminates vapor release and spills when in travel mode by engaging the hold-down bracket with easy-to-grasp tightening screw
- Bracket tethered to spout features a fusible link that melts at 165 F (74 C) to prevent pressure build-up at elevated temperatures
- Patented AccuFlow™ manifold includes air displacement vent for smooth, glug-free liquid flow
- Easy-to-use flow-control Safe-Squeeze® trigger provides fast, precision pouring
- FM-approved and meets D.O.T. UN marking 1A1/Y1.2/100



| Description and Capacity | Hose OD x L (mm) | Can OD x H (mm) | Approv/Lstg Regulation | D.O.T. Red Model | D.O.T. Yellow Model | CA Prop 65 |
|--------------------------------------|----------------------------|--------------------------------|------------------------|------------------|---------------------|------------|
| 2.5 gallon (9.5L) D.O.T. Type II can | 0.625 x 9 in (16 x 229 mm) | 11.75 x 13 in (298 x 330 mm) | FM, D.O.T., UN | 7325120 | 7325220 | ⚠ |
| 2.5 gallon (9.5L) D.O.T. Type II can | 1 x 9 in (25 x 229 mm) | | | 7325130 | 7325230 | ⚠ |
| 5 gallon (19L) D.O.T. Type II can | 0.625 x 9 in (16 x 229 mm) | 11.75 x 18.5 in (298 x 470 mm) | | 7350110 | 7350210 | ⚠ |
| 5 gallon (19L) D.O.T. Type II can | 1 x 9 in (25 x 229 mm) | | | 7350130 | 7350230 | ⚠ |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Type I Poly Safety Cans

Chemical-resistant HDPE cans offer safe storage for flammable corrosives in a space-saving design

- Independently fire tested and approved by FM Approvals
- Durable one-piece body construction that resist dents, punctures, and chips to withstand abusive environments
- Patented conductive current-carrying carbon insert embedded into the rib of containers completes a ground path between the cover assembly and the flame arrester. When used with a grounding strip, this prevents the creation of a static arc during filling or pouring.
- Self-closing cap, pressure-relief mechanism and flame arrester prevent ignition sources from entering without restricting liquid flow in or out of the can
- Resistant to tough acids and heat
- Suitable for most high-purity liquids



Use smaller capacity safety cans with flame arresters to safely dispense and store chemicals found in laboratories.



Patented conductive current carrying carbon insert



14561




14160 with 11201



12162

| Description and Capacity | W x L x H | OD x L | Approv/Lstg Regulation | Red Model | White Model |
|--|--|--------|------------------------|-----------|-------------|
| 0.5 gallon (2 L) oval polyethylene safety can | 4.625 x 7.625 x 9.5 in 117 x 194 x 241 mm | — | FM | 14065 | — |
| 1 gallon (4 L) oval polyethylene safety can | 4.625 x 7.625 x 12.75 in 117 x 194 x 324 mm | | | 14160 | 12162 |
| 2.5 gallon (9.5 L) round polyethylene safety can | 10.75 x 14.25 in 273 x 362 mm | — | FM, UL | 14261 | — |
| 5 gallon (19 L) round polyethylene safety can | 12.75 x 16 in 324 x 406 mm | | | 14561 | — |



14411

11201

| Accessories | W x L x H | OD x L | Approv/Lstg Regulation | Model |
|---|-----------|---------------------------------|------------------------|-------|
| Polyethylene funnel for oval cans | — | 0.562 x 6.5 in 14.3 x 165 mm | — | 11201 |
| Bolt-on funnel with galvanized hose for 2.5 gallon (9.5 L) and 5 gallon (19 L) cans | — | 1 x 13.5 in 25 x 343 mm | — | 14411 |

Safety Dispensing Containers

Same benefits of our classic Type I safety cans, but also include faucets for safe dispensing of hazardous liquids into small flasks and beakers

- All styles are FM-approved
- Fill spouts feature self-closing pressure-relief caps and stainless-steel flame arresters
- Self-closing faucets provide trouble-free dispensing
- **Polyethylene Safety Dispensing Cans** provide superb corrosion protection, and a unique current-carrying carbon insert embedded into the container allows for proper grounding
- **Steel & Poly Shelf Cans** have a faucet mounted 2-in (51-mm) above the bottom to eliminate the need to lift the cans during dispensing
- **Steel-Tilt Cans** have a faucet on top and the can rests in a sturdy metal cradle. Cradle base measures 13.8125- by 14-in (351-mm x 356-mm).



Tilt cradle allows can to swing forward for dispensing while holding can securely on bench top.



| Description and Capacity | Can OD x H | Approv/Lstg Regulation | Red Can Model | Yellow Can Model | CA Prop 65 |
|--|--------------------------------|------------------------|---------------|------------------|------------|
| 2.5 gallon (9.5 L) steel safety shelf can with bottom faucet 08540 | 11.75 x 11.5 in | FM | 7225140 | 7225240 | |
| 2.5 gallon (9.5 L) steel safety shelf can with bottom faucet 08902 | 298 x 292 mm | | 7225150 | 7225250 | |
| 5 gallon (19 L) steel safety shelf can with bottom faucet 08540 | 11.75 x 16.875 in | | 7150140 | 7150240 | |
| 5 gallon (19 L) steel safety shelf can with bottom faucet 08902 | 298 x 429 mm | | 7150150 | 7150250 | |
| 5 gallon (19 L) tilt steel safety can with top faucet 08540 and stand | 11.75 x 15.875 in | | 7150146 | | |
| 5 gallon (19 L) tilt steel safety can with top faucet 08902 and stand | 298 x 403 mm | FM, UL | 7150156 | | |
| 5 gallon (19 L) steel safety can with top faucet 08540 | 11.75 x 15.875 in | FM | 7150147 | | |
| 5 gallon (19 L) steel safety can with top faucet 08902 | 298 x 403 mm | | 7150157 | | |
| 1 gallon (4 L) oval polyethylene safety shelf can with self-close stainless steel faucet 08919 | 7.25 x 11.5 in 184 x 292 mm | | 14169 | — | |
| 5 gallon (19 L) polyethylene safety shelf can with self-close bottom faucet 08540 | 11.5 x 17 in 292 x 432 mm | | 14545 | | ⚠ |
| 5 gallon (19 L) polyethylene tilt safety can with self-close faucet 08540 and stand | 11.5 x 17 in | | 14535 | | ⚠ |
| 5 gallon (19 L) polyethylene safety can with self-close top faucet 08540 | 292 x 432 mm | 14540 | | ⚠ | |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Squeeze Bottles

Made of polyethylene with a stainless-steel wire, squeeze bottles provide safe dispensing of flammable liquids directly on small components or subassemblies with a minimum of over-spray. Squeezing the bottle produces a fine stream of liquid. Stem can be shaped to dispense into hard-to-get areas. Intended for daily use only.



Squeeze bottle to target liquid directly onto cleaning cloths or parts.

| Description and Capacity | OD x H | Model |
|---|-------------------------------|-------|
| 1 pint (0.5 L) polyethylene squeeze bottle with flexible dispensing tube, translucent | 3 x 7.5 in 76 x 191 mm | 14009 |
| 1 quart (1 L) polyethylene squeeze bottle with flexible dispensing tube, translucent | 3.5 x 9.125 in 89 x 232 mm | 14011 |

Bottle Jacket

Two-piece bottle jacket provides added protection of a polyethylene cover around chemical glass bottles. Jacket acts as a shock absorber to minimize breakage and spills due to bumps or falls. One-gallon (4-L) bottle fits into the bottom half of the jacket and lid twists on securely for safe pouring. Translucent color aids in detecting liquid level.

| Description and Capacity | OD x H | Model |
|---|---------------------------|-------|
| Translucent polyethylene bottle jacket for 1 gallon (4 L) bottles | 6 x 14 in 152 x 356 mm | 12009 |



Self-Closing Containers for Non-flammable Corrosives

Improve safety and ensure containment with translucent high-density polyethylene laboratory containers. Spring-close cap provides a tight seal. Flame arrester-free spout allows quick pouring of non-flammable corrosives. Oval containers have trigger handle for one-handed pouring. The 2- to 5-gallon (7.5- to 19-L) sizes have fixed position on handle.



| Description and Capacity | OD x H | Spout Dia | Model |
|--|--|-------------------|-------|
| 1 gallon (4 L) oval polyethylene container with stainless steel hardware | 4.625 x 7.625 x 12.75 in 117 x 194 x 324 mm | 1.45 in 37 mm | 12161 |
| 2 gallon (7.5 L) wide mouth polyethylene container with stainless steel hardware | 12 x 14.75 in 305 x 375 mm | 3.625 in 92 mm | 12762 |
| 2.5 gallon (9.5 L) polyethylene container with stainless steel hardware | 10.75 x 15.25 in 273 x 387 mm | 1.45 in 37 mm | 12260 |
| 5 gallon (19 L) wide mouth polyethylene container with stainless steel hardware | 12 x 20 in 305 x 508 mm | 3.625 in 92 mm | 12765 |

HPLC Safety Disposal Cans

Quick-disconnect fittings and coalescing carbon filters keep labs and personnel safe with a compliant solution to HPLC waste collection

- Provides vapor and fire protection
- Safeguards against accidental spills
- Hands free solvent collection suitable for either pump-fed or gravity-flow HPLC waste methods
- Translucent polyethylene container allows quick visual inspection of liquid level
- Two disconnect fittings eliminate back pressure in liquid flow disposal line and provide controlled handling of vapor
- Pouring spout equipped with stainless steel flame arrester to prevent flashback ignition
- Easy-on, easy-off quick-disconnect mechanism prevents leaks, drips or vapor release
- Coalescing/carbon filter controls odors
- Automatically sealed after disconnecting
- FM-approved; meets OSHA, NFPA and EPA requirements



Manifold kit provides a convenient, cost effective way to collect waste from multiple HPLC machines.

Coalescing carbon filter
Optional filters are for use with only round style cans

Optional manifold
Valved quick-disconnect fittings automatically close when decoupled to prevent vapor or liquid release

Translucent color lets you check liquid level at a glance

Oval-style maximizes storage space and features one-handed pouring from narrow 1-7/16-in (36-mm) spout



Create custom cans, with up to eight ports, for multiple HPLC units. See our custom-can form online at justrite.com

| Capacity | OD x H | Fitting No 1 for Liquid Intake | | | Fitting No 2 for Vapor Release | | | Model |
|---|--|--------------------------------|--------|-------------------|--------------------------------|--------|-------------------|---------|
| | | Material | O-Ring | Tubing* Size ID | Material | O-Ring | Tubing* Size ID | |
| 1 gallon (4 L) oval can | 7.75 x 5.25 x 12.75 in 197 x 133 x 324 mm | Polypropylene | EPDM | 0.375 in 10 mm | Polypropylene | EPDM | 0.375 in 10 mm | 12160 |
| 2 gallon (7.5 L) round can | 12 x 14.75 in 305 x 375 mm | Stainless steel | PTFE | | Stainless steel | PTFE | | TF12752 |
| 2 gallon (7.5 L) round can | | Polypropylene | EPDM | | Polypropylene | EPDM | | BY12752 |
| 2 gallon (7.5 L) round can | | Stainless steel | PTFE | | Stainless steel | PTFE | | TF12755 |
| 5 gallon (19 L) round can | 12 x 20 in 305 x 508 mm | Polypropylene | EPDM | | Polypropylene | EPDM | | BY12755 |
| 5 gallon (19 L) round can | | Stainless steel | PTFE | | Stainless steel | PTFE | | PP12755 |
| 5 gallon (19 L) round can | | Stainless steel | PTFE | 0.25 in 6 mm | Stainless steel | PTFE | 12770 | |
| 5 gallon (19 L) round can with faucet no. 08916 | | | | | | | 0.375 in 10 mm | 12771 |
| 5 gallon (19 L) round can with faucet 08916 | | | | | | | | 12771 |

* Tubing not supplied with containers.

Coalescing Carbon Filters

Use with HPLC cans to minimize odor and capture 99% of liquid particulates released as gaseous vapor. Vent filter snaps conveniently into the quick-disconnect fitting. Carbon filter cartridge color indicator beads change from purple to black when replacement is necessary. Replace the coalescing filter after three or four carbon filter cycles. Meets EPA 40 CFR 264.173.

| Description | Attachment/Use With | Model |
|--|---|-------|
| Coalescing/carbon filter combo with stainless steel fittings | Disconnect cans with stainless steel fittings | 28162 |
| Coalescing/carbon filter combo with polypropylene fittings | Disconnect cans with polypropylene fittings | 28161 |

| Carbon Filter Replacements | Attachment/Use With | Model |
|---|---|-------|
| Colormetric/carbon filter 3-pack replacements | 28162 or 28161 Coalescing/carbon filter | 28157 |

NOTE: When using HPLC carbon filter with FM approved Justrite safety disposal can, the Justrite safety disposal container has not been FM approved or tested in assembly with the HPLC filter attached. However, the container does comply with US OSHA 1910 and NFPA Code 30 requirements, both with and without the HPLC filter. Do not transport safety container while carbon filter is attached.



Filter Replacement Window

28161

28162




28157

HPLC PTFE Manifold and Compression Fittings

Enables up to six waste lines (per manifold) from HPLC processes to be fed into a single intake fitting. Safety container with manifold installed is OSHA compliant and meets NFPA Code 30. Use on round containers; not for use on oval style can.

| Description | Attachment/Use With | Model |
|---|--|-------|
| PTFE manifold with stainless steel fitting | Containers with stainless steel fittings | 28177 |
| PTFE manifold with polypropylene fitting | Containers with polypropylene fittings | 28178 |
| PTFE manifold with stainless stacker connector | 28177 or 28178 | 28179 |
| OD 0.0625 in hard wall ETFE tubing compression fittings with ferrules (package of six - blue) | | 28188 |
| OD 0.125 in hard wall ETFE tubing compression fittings with ferrules (package of six - green) | | 28189 |
| OD 2 mm hard wall ETFE tubing compression fittings with ferrules (package of six - yellow) | | 28121 |
| OD 2.5 mm hard wall ETFE tubing compression fittings with ferrules (package of six - orange) | | 28122 |
| OD 3 mm hard wall ETFE tubing compression fittings with ferrules (package of six - red) | | 28123 |

Polytetrafluoroethylene (PTFE) is a synthetic fluoropolymer. Ethylene tetrafluoroethylene (ETFE) is a fluorine based plastic.



28178



28189



Manifold 28177 with stacker 28179 and tubing connector package 28188 and 28189.

Spill Basin

Durable polyethylene basin keeps work area clean around HPLC cans and captures any inadvertent leakage from HPLC inflow tubes.

| Description | W x L x H | Model |
|-----------------|--|-------|
| 5 gallon (19 L) | 14.875 x 14.875 x 7.625 (379 x 379 x 194 mm) | 84003 |



84003 with TF12755

VaporTrap™ Solvent Waste Systems

Closed, leakproof system helps eliminate spills and filters volatile organic vapors from being released into the air

- Collect from one or more HPLC machines—polypropylene cap with acetal homopolymer adapter offers a wide range of tubing port configurations with and without hose barb ports
- Two-piece cap design eliminates the need to disconnect tubing from the adapter to install a closed cap
- Carbon exhaust filter traps potentially harmful vapors
- Adapter and high-density polyethylene (HDPE) carboy provide excellent chemical compatibility against aggressive liquids
- Rectangular shape saves bench space
- Large top handles for an ergonomic full-hand grip for added safety when moving the carboy, and clear graduation marks with ±5% accuracy
- Optional filter replacement indicator shows when filter is saturated and needs replacement



Improve air quality in labs by using a carbon exhaust filter which traps solvent vapors—install in horizontal or vertical position.

Tubing Sizing Guide for Ports

See Tubing Sizing Guide on page 54 to help determine port size needed.



| Accessories | Model |
|---|-------|
| Replacement carbon exhaust filter, package of two Filter size: 1.9 OD x 7 in | 12849 |
| Carbon exhaust filter indicator, package of two | 12952 |
| Replacement fittings, six 1/8 in fittings and six 1/4 in plugs, one pack | 12851 |

| Carboy Size | W x L X H* | Material Type | Cap Size | 1/8 in Tubing OD Ports | 1/4 in Tubing OD Ports | 1/4 in or 3/8 in Tubing ID Hose Barb Ports | Model |
|-------------------|--|---------------|----------|------------------------|------------------------|--|-------|
| 1.1 gallon (4 L) | 6.1 x 6.1 x 15.75 in (155 x 155 x 400 mm) | HDPE | 83 mm | 6 | — | — | 12800 |
| 1.3 gallon (5 L) | 5.2 x 8.7 x 18.75 in (132 x 221 x 476 mm) | | | | | | 12801 |
| 2.6 gallon (10 L) | 6.4 x 10.75 x 21.9 in (163 x 273 x 556 mm) | | | | | | 12802 |
| 5.3 gallon (20 L) | 8.1 x 13.6 x 26.7 in (206 x 345 x 678 mm) | | | | | | 12803 |
| 1.1 gallon (4 L) | 6.1 x 6.1 x 15.75 in (155 x 155 x 400 mm) | HDPE | 83 mm | 6 | — | 1 | 12805 |
| 1.3 gallon (5 L) | 5.2 x 8.7 x 18.75 in (132 x 221 x 476 mm) | | | | | | 12806 |
| 2.6 gallon (10 L) | 6.4 x 10.75 x 21.9 in (163 x 273 x 556 mm) | | | | | | 12807 |
| 5.3 gallon (20 L) | 8.1 x 13.6 x 26.7 in (206 x 345 x 678 mm) | | | | | | 12808 |
| 1.1 gallon (4 L) | 6.1 x 6.1 x 15.75 in (155 x 155 x 400 mm) | HDPE | 83 mm | 4 | 3 | — | 12810 |
| 1.3 gallon (5 L) | 5.2 x 8.7 x 18.75 in (132 x 221 x 476 mm) | | | | | | 12811 |
| 2.6 gallon (10 L) | 6.4 x 10.75 x 21.9 in (163 x 273 x 556 mm) | | | | | | 12812 |
| 5.3 gallon (20 L) | 8.1 x 13.6 x 26.7 in (206 x 345 x 678 mm) | | | | | | 12813 |
| 1.1 gallon (4 L) | 6.1 x 6.1 x 15.75 in (155 x 155 x 400 mm) | HDPE | 83 mm | 4 | 4 | — | 12815 |
| 1.3 gallon (5 L) | 5.2 x 8.7 x 18.75 in (132 x 221 x 476 mm) | | | | | | 12816 |
| 2.6 gallon (10 L) | 6.4 x 10.75 x 21.9 in (163 x 273 x 556 mm) | | | | | | 12817 |
| 5.3 gallon (20 L) | 8.1 x 13.6 x 26.7 in (206 x 345 x 678 mm) | | | | | | 12818 |
| 1.1 gallon (4 L) | 6.1 x 6.1 x 15.75 in (155 x 155 x 400 mm) | HDPE | 83 mm | 4 | 3 | 1 | 12820 |
| 1.3 gallon (5 L) | 5.2 x 8.7 x 18.75 in (132 x 221 x 476 mm) | | | | | | 12821 |
| 2.6 gallon (10 L) | 6.4 x 10.75 x 21.9 in (163 x 273 x 556 mm) | | | | | | 12822 |
| 5.3 gallon (20 L) | 8.1 x 13.6 x 26.7 in (206 x 345 x 678 mm) | | | | | | 12823 |

*Note: Height includes filter oriented in horizontal position.

VaporTrap™ UN/DOT Solvent Waste Systems

Ensure safe transport of hazardous liquids in United Nations/Department of Transportation certified carboys

- UN/DOT certified carboy and 70-mm closed cap (UN Rating 3H1/Y1.8/100) designed for HPLC waste collection from single and multiple machines—for easy, single use disposal for laboratory waste
- For packaging group II and hazardous chemicals
- High-density polyethylene (HDPE) cap with acetal homopolymer adapter offers a wide range of top connection options—select tubing port configurations to accommodate various tubing sizes to create a closed loop system to prevent leaks or spills
- Two-piece design eliminates the need to disconnect tubing from the adapter to install a closed cap
- Carbon exhaust filter prevents volatile organic compound vapors from being released into the air, protecting workers from inhaling dangerous fumes
- Optional filter replacement indicator shows when filter is saturated and needs replacement



Safely dispose of laboratory waste—simply remove cap with filter and replace with closed cap for transport.



12846

12841

| Carboy Size | W x L X H* | Material Type | Cap Size | 1/16 in Tubing OD Ports | 1/8 in Tubing OD Ports | 1/4 in Tubing OD Ports | 1/4 in or 3/8 in Tubing ID Hose Barb Ports | Model |
|---------------------|--|---------------|----------|-------------------------|------------------------|------------------------|--|-------|
| 3.6 gallon (13.5 L) | 9.25 x 11.3 x 13.1 in (235 x 287 x 333 mm) | HDPE | 70 mm | 6 | — | — | — | 12836 |
| 5.3 gallon (20 L) | 9.25 x 11.3 x 17.5 in (235 x 287 x 445 mm) | | | | | | | 12837 |
| 3.6 gallon (13.5 L) | 9.25 x 11.3 x 13.1 in (235 x 287 x 333 mm) | HDPE | 70 mm | — | 6 | — | — | 12838 |
| 5.3 gallon (20 L) | 9.25 x 11.3 x 17.5 in (235 x 287 x 445 mm) | | | | | | | 12839 |
| 3.6 gallon (13.5 L) | 9.25 x 11.3 x 13.1 in (235 x 287 x 333 mm) | HDPE | 70 mm | — | 6 | — | 1 | 12840 |
| 5.3 gallon (20 L) | 9.25 x 11.3 x 17.5 in (235 x 287 x 445 mm) | | | | | | | 12841 |
| 3.6 gallon (13.5 L) | 9.25 x 11.3 x 13.1 in (235 x 287 x 333 mm) | HDPE | 70 mm | — | 4 | 3 | — | 12842 |
| 5.3 gallon (20 L) | 9.25 x 11.3 x 17.5 in (235 x 287 x 445 mm) | | | | | | | 12843 |
| 3.6 gallon (13.5 L) | 9.25 x 11.3 x 13.1 in (235 x 287 x 333 mm) | HDPE | 70 mm | — | 4 | 4 | — | 12844 |
| 5.3 gallon (20 L) | 9.25 x 11.3 x 17.5 in (235 x 287 x 445 mm) | | | | | | | 12845 |
| 3.6 gallon (13.5 L) | 9.25 x 11.3 x 13.1 in (235 x 287 x 333 mm) | HDPE | 70 mm | — | 4 | 3 | 1 | 12846 |
| 5.3 gallon (20 L) | 9.25 x 11.3 x 17.5 in (235 x 287 x 445 mm) | | | | | | | 12847 |

*Note: Height includes filter oriented in horizontal position.

UN/DOT Approved Carboys

| Capacity | W x L X H | Material Type | Cap Size | Model |
|---------------------|--|---------------------------|----------|-------|
| 3.6 gallon (13.5 L) | 9.25 x 11 x 11 in (235 x 279 x 279 mm) | High-density polyethylene | 70 mm | 12950 |
| 5.3 gallon (20 L) | 9 x 11 x 15.5 in (229 x 279 x 394 mm) | | | 12951 |

| Accessories | Model |
|---|-------|
| Replacement carbon exhaust filter, package of two. Filter size: 1.9 OD x 7 in | 12849 |
| Carbon exhaust filter indicator, package of two | 12952 |
| Replacement fittings, six 1/8 in fittings and six 1/4 in plugs, one pack | 12851 |



12952



12849

High-Density Polyethylene (HDPE) Carboys

Excellent chemical compatibility for storing and dispensing solvents, buffers, reagents and powders

- Interchangeable caps and adapters provide top connection flexibility
- Constructed from USP Class VI, FDA grade HDPE resin for excellent chemical resistance
- Material, volume, and metric graduation marks
- Choose amber carboy for light-sensitive applications
- Polypropylene cap with platinum-cured silicone gasket provides a tight spill-proof seal
- Larger 120-mm neck size for easy cleaning
- Compatible with interchangeable adapters
- Leakproof polypropylene spigots include spigot lever with two flow rates, continuous or manual, and feature an internal luer taper that fits a male barb adapter
- See page 54 for a wide range of adapters, more spigots, and versatile barbs for alternate bottom hosing connection options



Rectangular design saves valuable floor space—larges handles and base with molded hand-grip makes it easy to lift and pour.

| Capacity | W x L x H* | Cap Size | Model |
|---|--|----------|-------|
| High-Density Polyethylene Carboys | | | |
| 0.7 gallon (2.5 L) | 5 x 6.7 x 12 in (127 x 170 x 305 mm) | 83 mm | 12907 |
| 1.3 gallon (5 L) | 5.2 x 8.7 x 16.3 in (132 x 221 x 414 mm) | | 12908 |
| 2.6 gallon (10 L) | 6.4 x 10.75 x 19.5 in (163 x 273 x 495 mm) | | 12909 |
| 5.3 gallon (20 L) | 8.1 x 13.6 x 24.2 in (206 x 345 x 615 mm) | | 12910 |
| | 8.1 x 13.6 x 25.2 in (206 x 345 x 640 mm) | 12911 | |
| 10.6 gallon (40 L) | 9.8 x 17.1 x 30.4 in (249 x 434 x 772 mm) | 120 mm | 12912 |
| 19.8 gallon (75 L) | 14.4 x 18.7 x 30 in (366 x 475 x 762 mm) | | 12913 |
| High-Density Polyethylene Carboys with Spigots | | | |
| 1.3 gallon (5 L) | 5.2 x 12 x 16.3 in (132 x 305 x 414 mm) | 83 mm | 12914 |
| 2.6 gallon (10 L) | 6.4 x 13 x 19.5 in (163 x 330 x 495 mm) | | 12915 |
| 5.3 gallon (20 L) | 8.1 x 15.25 x 24.2 in (206 x 387 x 615 mm) | | 12916 |
| | 8.1 x 15.25 x 25.2 in (206 x 387 x 640 mm) | 12917 | |
| 10.6 gallon (40 L) | 9.8 x 18.75 x 30.4 in (249 x 476 x 772 mm) | 120 mm | 12918 |
| High-Density Polyethylene Carboys, Amber | | | |
| 0.7 gallon (2.5 L) | 5 x 6.7 x 12 in (127 x 170 x 305 mm) | 83 mm | 12919 |
| 1.3 gallon (5 L) | 5.2 x 8.7 x 16.3 in (132 x 221 x 414 mm) | | 12920 |
| 2.6 gallon (10 L) | 6.4 x 10.75 x 24.2 in (163 x 273 x 615 mm) | | 12921 |
| 5.3 gallon (20 L) | 8.1 x 13.6 x 25.2 in (206 x 345 x 640 mm) | 120 mm | 12922 |
| 10.6 gallon (40 L) | 9.8 x 17.1 x 30.4 in (249 x 434 x 772 mm) | | 12923 |
| High-Density Polyethylene Carboys, Amber, with Spigots | | | |
| 1.3 gallon (5 L) | 5.2 x 12 x 16.3 in (132 x 305 x 414 mm) | 83 mm | 12924 |
| 2.6 gallon (10 L) | 6.4 x 13 x 19.5 in (163 x 330 x 495 mm) | | 12925 |
| 5.3 gallon (20 L) | 8.1 x 15.25 x 25.2 in (206 x 387 x 640 mm) | 120 mm | 12926 |
| 10.6 gallon (40 L) | 9.8 x 18.75 x 30.4 in (249 x 476 x 772 mm) | | 12927 |

*Note: Length includes spigot, where applicable.



12911



12907

12924

Polypropylene Carboys

Polypropylene construction allows for proper sterilization between uses

- Constructed from USP Class VI, FDA grade material PP resin for good chemical compatibility with reagents, buffers, and powders
- Autoclavable at 15 PSI and 250 F (121 C) for 20 minutes
- Polypropylene cap with platinum-cured silicone gasket provides a tight spill-proof seal
- Space-saving rectangular design with large handles and molded hand-grip for easy lifting and pouring
- Material, volume, and metric graduation marks
- Larger 120-mm neck size for easy cleaning
- Choose dark amber carboy for light sensitive applications and heat stability
- Compatible with interchangeable adapters
- Leakproof polypropylene spigots include spigot lever with two flow rates, continuous or manual, and feature an internal luer taper that fits a male barb adapter
- See page 54 for a wide range of adapters, more spigots, and versatile barbs for alternate bottom hosing connection options



Made from a hard, opaque material, dark amber carboys offer good chemical resistance and protection from light.

| Capacity | W x L X H* | Cap Size | Model |
|--|--|----------|-------|
| Polypropylene Carboys | | | |
| 0.7 gallon (2.5 L) | 5 x 6.7 x 12 in (127 x 170 x 305 mm) | 83 mm | 12928 |
| 1.3 gallon (5 L) | 5.2 x 8.7 x 16.3 in (132 x 221 x 414 mm) | | 12929 |
| 2.6 gallon (10 L) | 6.4 x 10.75 x 19.5 in (163 x 273 x 495 mm) | | 12930 |
| 5.3 gallon (20 L) | 8.1 x 13.6 x 24.2 in (206 x 345 x 615 mm) | | 12931 |
| | 8.1 x 13.6 x 25.2 in (206 x 345 x 640 mm) | 12932 | |
| 10.6 gallon (40 L) | 9.8 x 17.1 x 30.4 in (249 x 434 x 772 mm) | 120 mm | 12933 |
| 19.8 gallon (75 L) | 14.4 x 18.7 x 30 in (366 x 475 x 762 mm) | | 12934 |
| Polypropylene Carboys with 3" Sanitary Neck | | | |
| 2.6 gallon (10 L) | 6.4 x 10.75 x 19.2 in (163 x 273 x 488 mm) | — | 12935 |
| 5.3 gallon (20 L) | 8.1 x 13.6 x 23.8 in (206 x 345 x 605 mm) | | 12936 |
| 10.6 gallon (40 L) | 9.8 x 17.1 x 29 in (249 x 434 x 737 mm) | | 12937 |
| Polypropylene Carboys with Spigots | | | |
| 1.3 gallon (5 L) | 5.2 x 12 x 16.3 in (132 x 305 x 414 mm) | 83 mm | 12938 |
| 2.6 gallon (10 L) | 6.4 x 13 x 19.5 in (163 x 330 x 495 mm) | | 12939 |
| 5.3 gallon (20 L) | 8.1 x 15.25 x 24.2 in (206 x 387 x 615 mm) | | 12940 |
| | 8.1 x 15.25 x 25.2 in (206 x 387 x 640 mm) | 12941 | |
| 10.6 gallon (40 L) | 9.8 x 18.75 x 30.4 in (249 x 476 x 772 mm) | 120 mm | 12942 |
| Polypropylene Carboys, Dark Amber | | | |
| 1.3 gallon (5 L) | 5.2 x 8.7 x 16.3 in (132 x 221 x 414 mm) | 83 mm | 12943 |
| 5.3 gallon (20 L) | 8.1 x 13.6 x 25.2 in (206 x 345 x 640 mm) | 120 mm | 12945 |

*Note: Length includes spigot, where applicable.



12929



12930



12938



Interchangeable Carboy Caps and Adapters

- Leakproof, polypropylene quick-connect caps and adapters offer easy port changes
- Autoclavable at 15 PSI and 250 F (121 C) for 20 minutes
- Two-piece cap and adapter design prevents tube twisting when opening
- Designed to be stackable, caps feature large grips for easy opening and tightening
- Caps included platinum-cured silicone gasket for a tight spill-proof seal
- Adapters are available with quick-connect hose barb options including two, three, or four port combination, as well as hose barb options for top connection flexibility



Twenty-four popular models meet a variety of applications.

Tubing Sizing Guide for Ports

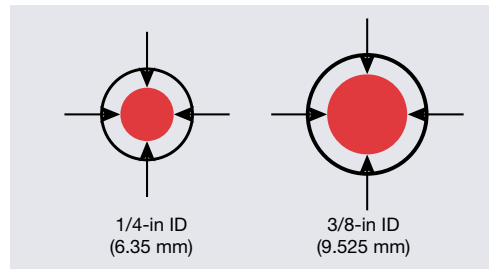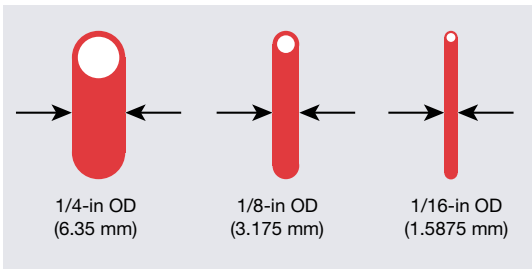

For measuring OD for ports, place the tube next to each of the images to determine the correct size of the tubing.

For measuring ID for hose barb ports, place end of tube flat on image below and determine if the dark area is contained by the tubing.

| Description | OD X H | Cap Size | Hose Barb Size | Quick Disconnects | Model | |
|--|-----------------------------|-----------------|---------------------------|-------------------|-------|-------|
| Caps | | | | | | |
| Closed cap, package of two | 5 x 2.6 in (127 x 66 mm) | 83 mm | — | — | 12857 | |
| Open cap with closed adapter, package of two | 5 x 3 in (127 x 76 mm) | | 1/4 in (6.4 mm) | | 12858 | |
| Open cap with two hose barbs and vent | 5 x 4.6 in (127 x 117 mm) | | 1/2 in (12.7 mm) | | 12859 | |
| Open cap with two hose barbs and vent | | | 12860 | | | |
| Closed cap, package of two | 7.5 x 4 in (191 x 102 mm) | 120 mm | — | — | 12861 | |
| Open cap with closed adapter, package of two | 7.5 x 4.4 in (191 x 112 mm) | | 12862 | | | |
| Adapters | | | | | | |
| Closed adapter, clear top | 3.2 x 1 in (81 x 25 mm) | 83 mm | — | — | 12868 | |
| Adapter with two hose barbs | 3.2 x 2.8 in (81 x 71 mm) | | 1/4 in (6.4 mm) | 2 | 12869 | |
| Adapter with two hose barbs | | | 3/8 in (9.5 mm) | | 12870 | |
| Adapter with three hose barbs | | | 1/4 in (6.4 mm) | 3 | 12871 | |
| Adapter with three hose barbs | | | 3/8 in (9.5 mm) | | 12872 | |
| Adapter with four hose barbs | | | 1/4 in (6.4 mm) | 4 | 12873 | |
| Adapter with four hose barbs | | | 3/8 in (9.5 mm) | | 12874 | |
| Adapter with two hose barbs and vent | | | 3.2 x 1.9 in (81 x 48 mm) | 1/4 in (6.4 mm) | — | 12875 |
| Adapter with two hose barbs and vent | | | | 1/2 in (12.7 mm) | | 12876 |
| Closed adapter | 4.7 x 2.1 in (119 x 53 mm) | | — | — | 12877 | |
| Adapter with two hose barbs | 4.7 x 3.7 in (119 x 94 mm) | 1/4 in (6.4 mm) | 2 | 12878 | | |
| Adapter with two hose barbs | | 3/8 in (9.5 mm) | | 12879 | | |
| Adapter with three hose barbs | | 1/4 in (6.4 mm) | 3 | 12880 | | |
| Adapter with three hose barbs | | 3/8 in (9.5 mm) | | 12881 | | |
| Adapter with four hose barbs | | 1/4 in (6.4 mm) | 4 | 12882 | | |
| Adapter with four hose barbs | | 3/8 in (9.5 mm) | | 12883 | | |
| Adapter, converts 83 mm adapters to 120 mm | 4.7 x 1.7 in (120 x 43 mm) | — | — | 12884 | | |

Liquid Disposal Safety Cans

HDPE disposal cans provide a solution for the containment of liquid flammable or corrosive waste

- Durable poly in safety red or translucent white to easily detect liquid level
- Current-carrying, patented carbon insert embedded in the container allows for proper grounding
- Stainless steel handle and hardware with latch-catch system hold the cap open for easy filling and pouring
- Provides superior chemical resistance and leak protection
- Broad-base design prevents accidental tip over



Large opening with cap held open provides convenient filling and pouring.

Model numbers 14265 and 14565 include built-in polyethylene fill gauge indicator pops up to warn you that the container is almost full.



14762

14265

12772

| Description and Capacity | OD x H | Approv/Lstg Regulation | Red Model | White Model | |
|--|------------------------------|------------------------|-----------|-------------|-------|
| 2 gallon (7.5 L) polyethylene can with stainless steel hardware with 08530 fill gauge built-in | 12 x 14.75 in (305 x 375 mm) | — | 14265 | — | |
| 2 gallon (7.5 L) polyethylene can with stainless steel hardware | | FM | 14762 | 12751 | |
| 5 gallon (19 L) polyethylene can with stainless steel hardware | 14765 | | 12754 | | |
| 5 gallon (19 L) polyethylene can with stainless steel hardware with 08530 fill gauge built-in | 12 x 20 in (305 x 508 mm) | | — | 14565 | — |
| 5 gallon (19 L) polyethylene can with stainless steel hardware and faucet | | | FM | — | 12772 |
| Replacement flame arrester, stainless steel | — | — | 11406 | 11406 | |

Countertop Lab Tray

Polyethylene tray catches drips or spills and keeps counter clean and uncontaminated

- Provides extra corrosion protection
- Slightly curved edge and ribbed bottom keeps containers from sitting in pooled liquid
- Also fits on top of steel shelves (fits models 29939 and 29949)

| Description | Nominal L x D | Model |
|---------------------|---------------------------------|-------|
| Countertop lab tray | 31.125 x 18.5 in (791 x 470 mm) | 29965 |



Drain Cans

Safely collect waste liquids from parts washing equipment with no spills or mess

- Features a wide-mouth, 8.875in (225-mm) plated steel funnel that catches drainage – position under rinse tanks to collect used solvents
- Built-in flame arrester on funnel protects liquid contents from ignition sources
- 0.75-in (19-mm) threaded plug permits disposal of waste liquids into a permanent receptacle
- Removable funnel for easy cleaning
- Optional drain can cover for funnel top keeps dirt out



Position drain cans under rinse tanks to safely collect used solvents.

| Description and Capacity | OD x H | Approv/Lstg Regulation | Model |
|--|----------------------------------|------------------------|-------|
| 3 gallon (11 L) steel drain can | 11.625 x 12.25 in (295 x 311 mm) | FM | 10903 |
| 5 gallon (19 L) steel drain can | 11.625 x 16.75 in (295 x 425 mm) | | 10905 |
| Optional drain can cover fits both sizes | | | 11176 |

Biohazard Waste Cans

Sturdy, leakproof steel cans with automatic self-closing lids provide safe, temporary collection of biological waste

- Safely store contaminated laundry and other regulated waste (no sharps)
- Great for medical facilities and research labs
- Meets OSHA 29 CFR 1910.1030 for the segregation of infectious waste
- Foot-operated, self-closing lid reduces risk of contamination
- Lessen disruptive closure noise with SoundGard™ models
- Optional label kit 25880 complies with California Health and Safety Code 118280



| Description and Capacity | OD x H | Approv/Lstg Regulation | White Model | Red Model | SoundGard™ White Model | SoundGard™ Silver Model |
|---|-----------------------------------|------------------------|-------------|-----------|------------------------|-------------------------|
| 6 gallon (20 L) biohazard can | 11.875 x 15.875 in (302 x 403 mm) | FM, TÜV | 05910 | 05910R | 05915 | 05914 |
| 10 gallon (34 L) biohazard can | 13.937 x 18.25 in (354 x 464 mm) | | 05930 | 05930R | 05935 | 05934 |
| 100 red liner bags, 11 microns thick | 33 x 24 in (838 x 610 mm) | — | | | 05901 | |
| Code compliant label kit for California (three labels and instructions) | | | | | 25880 | |

Oily Waste Cans

Dispose of oil-soaked rags and prevent fires caused by stray sparks or spontaneous combustion

- Lid stays closed when not in use to isolate contents from fire sources and limit available oxygen
- Round construction and elevated base allow circulation of air around can to disperse heat and reduce moisture build-up and rusting
- Durable steel construction with a powder-coat finish provides chemical resistance
- Swinging carry handle for portability
- Warning label with pictographs reduces miscommunication
- FM-approved; meets OSHA requirements



Foot pedal provides hands-free opening. When released, cover self-closes to reduce oxygen source and prevent a fire from starting.



09400



09100

09300

09500

09700

| Description and Nominal Gallon Capacity | OD x H | Approv/Lstg Regulation | Red Model | |
|---|-----------------------------------|------------------------|---------------|----------------|
| | | | Foot-Operated | Hand-Operated* |
| 0.45 gallon (2 L) oily waste can | 7 x 10.5 in (178 x 267 mm) | FM, NESAM, EPA | — | 09400 |
| 2 gallon (8 L) oily waste can | 9.625 x 9.125 in (244 x 232 mm) | FM | — | 09200 |
| 6 gallon (20 L) oily waste can | 11.875 x 15.875 in (302 x 403 mm) | FM, UL, TÜV | 09100 | 09110 |
| 10 gallon (34 L) oily waste can | 13.938 x 18.25 in (354 x 464 mm) | | 09300 | 09310 |
| 14 gallon (52 L) oily waste can | 16.063 x 20.25 in (408 x 514 mm) | | 09500 | 09510 |
| 21 gallon (80 L) oily waste can | 18.375 x 23.438 in (467 x 595 mm) | | 09700 | 09710 |

*Hand-operated models do not have TÜV certification.



Use quiet-closing SoundGard™ oily waste cans in environments where others are working close by.

Oily Waste Cans—Optional Colors

Enjoy the same safety features found in Justrite's red oily waste cans, in additional colors for versatile waste collection

- Prevent fires caused by stray sparks or spontaneous combustion
- Color identification helps segregate different types of waste rags and wipes or differentiate multiple work shifts or departments
- SoundGard™ style in silver or red lessens noise closure for quiet-working settings
- Foot-operated models offer hands-free opening
- FM-approved; meets OSHA requirements



09101



09104

| Description and Nominal Gallon Capacity | OD x H | Approv/Lstg Regulation | Standard Yellow Model | |
|---|-----------------------------------|------------------------|-----------------------|----------------|
| | | | Foot-Operated | Hand-Operated* |
| Standard Oily Waste Cans | | | | |
| 2 gallon (8 L) oily waste can | 9.625 x 9.125 in (244 x 232 mm) | FM | — | 09200Y |
| 6 gallon (20 L) oily waste can | 11.875 x 15.875 in (302 x 403 mm) | FM, UL, TÜV | 09101 | 09111 |
| 10 gallon (34 L) oily waste can | 13.938 x 18.25 in (354 x 464 mm) | | 09301 | 09311 |
| 14 gallon (52 L) oily waste can | 16.063 x 20.25 in (408 x 514 mm) | | 09501 | 09511 |
| 21 gallon (80 L) oily waste can | 18.375 x 23.438 in (467 x 595 mm) | | 09701 | 09711 |

*Hand-operated models do not have TÜV certification.

| Description and Nominal Gallon Capacity | OD x H | Approv/Lstg Regulation | SoundGard™ Foot-Operated | |
|---|-----------------------------------|------------------------|--------------------------|--------------|
| | | | Red Model | Silver Model |
| SoundGard™ Oily Waste Cans | | | | |
| 0.45 gallon (1.7 L) oily waste can | 4.625 x 6.50 in (117 x 165 mm) | FM | 09410* | — |
| 6 gallon (20 L) oily waste can | 11.875 x 15.875 in (302 x 403 mm) | FM, UL, TÜV | 09108 | 09104 |
| 10 gallon (34 L) oily waste can | 13.938 x 18.25 in (354 x 464 mm) | | 09308 | 09304 |
| 14 gallon (52 L) oily waste can | 16.063 x 20.25 in (408 x 514 mm) | | 09508 | 09504 |
| 21 gallon (80 L) oily waste can | 18.375 x 23.438 in (467 x 595 mm) | | 09708 | 09704 |

*0.45 gal (1.7 L) is hand-operated.



09410

Sound-muffling SoundGard™ lid significantly reduces noise closure.

Safety Drum Covers

- Converts open-top 30- or 55-gallon (110- or 200-L) steel drums into self-closing, fire-safe waste receptacles for combustible waste
 - ✓ 55-gallon (200-L) size fits drums from 22.50-in to 22.75-in (565- to 578-mm) diameter
 - ✓ 30-gallon (110-L) size fits drums 18.375-in (467-mm) diameter
- Replaceable fusible-link assembly melts at 165 F (74 C) to automatically slam shut cover if there is a fire in the drum
- Durable steel construction with powder-coat finish
- FM-approved and TÜV certified



High-visibility red finish provides awareness in the workplace.

| Description and Capacity | Approv/Lstg Regulation | Red Model | Yellow Model | CA Prop 65 |
|---|------------------------|-----------|--------------|------------|
| Self-close drum cover with fusible link for 55 gallon (200 L) drums | FM, TÜV | 26750 | 26751 | ⚠ |
| Self-close drum cover with fusible link for 30 gallon (110 L) drums | FM, TÜV | 26730 | — | ⚠ |
| Open head 55-gallon (200 L) drum | — | 26054 | — | |

Note: Drum and cover purchased separately.

Safety Drum Lids with Vapor Control

- Turns ordinary 55-gallon drums into fire-safe hazardous waste collection centers
- Controls odors and VOC emissions when disposing solvent-soaked rags
- Durable steel construction with power-coat finish
- All have gaskets and vents to comply with NESAM/EPA
 - ✓ Manual latching lid accepts an optional padlock (Model 26752)
 - ✓ Spring-loaded self-latching lid with gravity close seals drum (Model 26753)
 - ✓ Manual latching lid with easy-access port allows for fast discard (Vapor-Trap™ Model 26754)
- FM-approved

| Description and Capacity | Approv/Lstg Regulation | Model |
|--|------------------------|-------|
| Manual latching lid for 55 gallon (200 L) drums | FM, TÜV, NESAM, EPA | 26752 |
| Self-latching lid for 55 gallon (200 L) drums | FM, TÜV, NESAM, EPA | 26753 |
| Manual latching VaporTrap™ lid with port for 55 gallon (200 L) drums | FM, TÜV, NESAM, EPA | 26754 |
| Open head 55 gallon (200 L) drum | — | 26054 |

Note: Drum and lid purchased separately.



26752

Manual latching lid with gasket and vent



26754

Manual latching lid with gasket, vent, and easy-access port



26753

Self-closing lid with gasket and vent

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Cease-Fire® Waste Receptacles

The safe answer to waste paper and other solvent-free combustibles accumulation

- Brushed aluminum head models for easy cleaning and corrosion resistance
- Durable steel head models with red powder-coat paint for abusive conditions
- Rust preventative interior coating
- Specially contoured design directs smoke and gas from any fire inside the container, back into the combustion area
- Cuts off the air supply and extinguishes flames in seconds
- FM-approved



| Description and Capacity | Opening Dia | OD x H | Approv/Lstg Regulation | Gray Model | Black Model | White Model | |
|---|-------------------|----------------------------------|------------------------|------------|-------------|-------------|--------|
| 4.5 gallon (17 L) drum with aluminum head | 5 in (127 mm) | 12.125 x 14.25 in (308 x 362 mm) | FM, UL | 26604G | 26604K | 26604W | |
| 6 gallon (23 L) drum with aluminum head | | 12.125 x 16.75 in (308 x 425 mm) | | 26606G | 26606K | 26606W | |
| 12 gallon (45 L) drum with aluminum head | 5.25 in (133 mm) | 15.125 x 21 in (384 x 533 mm) | | 26612G | 26612K | 26612W | |
| 15 gallon (57 L) drum with aluminum head | | 15.125 x 25.75 in (384 x 654 mm) | | 26615G | 26615K | 26615W | |
| 30 gallon (110 L) drum with aluminum head | 7 in (179 mm) | 19.875 x 29.75 in (505 x 756 mm) | | FM | 26630G | 26630K | 26630W |
| 55 gallon (200 L) drum with aluminum head | 7.875 in (200 mm) | 24 x 35.5 in (610 x 902 mm) | | | 26655G | 26655K | 26655W |
| 12 gallon (45 L) drum with heavy-duty steel head | 5.25 in (133 mm) | 14.5 x 21 in (368 x 533 mm) | FM, UL | 26412 | — | — | |
| 15 gallon (57 L) drum with heavy-duty steel head | | 14.5 x 25.75 in (368 x 654 mm) | | 26415 | | | |
| 30 gallon (110 L) drum with heavy-duty steel head | 7 in (179 mm) | 19.25 x 29.75 in (489 x 756 mm) | | 26430 | | | |
| 55 gallon (200 L) drum with heavy-duty steel head | 7.875 in (200 mm) | 23.75 x 35.5 in (603 x 902 mm) | FM | 26455 | | | |



Efficiently wet wipes with a simple pump action.

Safety Plunger Cans

Moisten cleaning cloths quickly and easily—smart-pump brings more liquid to the top and requires less time between refills

- Dispense flammable liquids and solvents safely, without waste or exposure
- Pump base design leaves less liquid in the bottom before requiring a refill
- Rugged 24-gauge steel cans with powder-coat finish for chemical resistance
- High-density polyethylene container option for greater corrosion resistance
- Approved by FM Approvals and TÜV



Perforated dasher dissipates heat.

| Description and Capacity | Dasher Assembly | Smart-Pump Assembly | Dasher Dia | OD x H | Approv/Lstg Regulation | Red Model | Yellow Model | CA Prop 65 |
|--|-----------------|---------------------|---------------|---------------------------------|------------------------|-----------|--------------|------------|
| 1 pint (0.5 L) steel plunger can | steel | brass & Ryton® | 5 in (128 mm) | 4.875 x 5.25 in 124 x 133 mm | FM, TÜV | 10008 | 10018 | |
| 1 quart (1 L) steel plunger can | | | | 7.25 x 5.625 in 184 x 143 mm | | 10108 | 10118 | |
| 2 quart (2 L) steel plunger can | | | | 7.25 x 7.875 in 184 x 200 mm | | 10208 | 10218 | |
| 1 gallon (4 L) steel plunger can | | | | 7.25 x 10.5 in 184 x 267 mm | | 10308 | 10318 | |
| 1 quart (1 L) polyethylene plunger can | brass | | | 5.5 x 8.25 in 140 x 210 mm | | 14018 | — | ⚠ |

Ryton® is a registered trademark of Chevron Phillips Chemical Company.

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Safety Bench Cans

- Simple downward push soaks parts in solvent for easy cleaning
- Durable 24-gauge steel with powder-coat finish for chemical resistance
- Flash-arresting plated steel dasher plate for safety
- All styles FM-approved—most certified by TÜV
- Hinged cover minimizes evaporation losses
- Protected rim reduces the possibility of hand injury



Clean small parts by pushing down dasher plate and agitate in cleaning solvent.



10370



10291



10471

| Description and Capacity | Dasher Dia | OD x H | Approv/Lstg Regulation | Red Model | Yellow Model |
|--|--------------------|---------------------------------|------------------------|-----------|--------------|
| 1 quart (1 L) steel bench can | 4.5 in (114 mm) | 4.875 x 5.5 in (124 x 140 mm) | FM, TÜV | 10175 | 10171 |
| 2 quart (2 L) steel bench can | | 9.375 x 3.25 in (238 x 83 mm) | | 10295 | 10291 |
| 1 gallon (4 L) steel bench can | 7.5 in (191 mm) | 9.375 x 4.5 in (238 x 114 mm) | | 10375 | 10385 |
| 1 gallon (4 L) steel bench can with parts basket | | | | 10370 | 10380 |
| 2 gallon (8 L) steel bench can | 9.75 in (248 mm) | 11.5 x 5.875 in (292 x 149 mm) | | 10575 | 10578 |
| 3 gallon (11 L) steel bench can with parts basket | 12.125 in (308 mm) | 13.5 x 6 in (343 x 152 mm) | | 10775 | — |
| 6 quart (6 L) steel swab pail | 7.5 in (191 mm) | 9.375 x 7.5 in (238 x 191 mm) | FM | 10471 | |
| Optional basket for bench cans 1 gallon (4 L) and larger | | 6.4375 x .4375 in (164 x 11 mm) | — | 11171 | |

Safety Dispenser Cans

- Safe, convenient way to release small amounts of liquid
- Allows for easy, one-hand dispensing of liquids directly onto work surfaces or into lab beakers
- Leakproof, self-closing, brass dispenser valve minimizes spills and controls excess
- FM-approved brass valves—ideal for use with flammables
- Textured, high-density polyethylene body provides a firm grip



14012

14010

14004

14002



14010 / 14004

| Description and Capacity | OD x H | Spout Opening ID | Approv/Lstg Regulation | Model | CA Prop 65 |
|--|------------------------------|------------------|------------------------|-------|------------|
| 4 ounce (0.12 L) polyethylene dispenser can, translucent | 2.25 x 5.5 in (57 x 140 mm) | 0.25 in (6 mm) | FM | 14002 | ⚠ |
| 8 ounce (0.24 L) polyethylene dispenser can, red | | | | 14004 | ⚠ |
| 8 ounce (0.24 L) polyethylene dispenser can, translucent | 3.125 x 5.5 in (79 x 140 mm) | | | 14005 | ⚠ |
| 1 quart (1 L) polyethylene dispenser can, red | | | | 14010 | ⚠ |
| 1 quart (1 L) polyethylene dispenser can, translucent | | | | 14012 | ⚠ |
| | 4 x 10.5 in (102 x 267 mm) | | | | |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Safety Cleaning Tanks

Self-closing dip tanks and wash tanks provide a safe, portable solution to parts cleaning

- Clean parts where the volume of work does not warrant a larger rinse tank
 - Use dip tanks for singular, larger piece parts
 - Wash tanks include baskets for cleaning small parts
- Tanks and baskets constructed of sturdy, 24-gauge coated steel with powder-coat finish for chemical resistance
- Tank cover stays open for convenient access; self-closing mechanism and fusible link melts at 165 F (74 C) to snap the cover shut in case of fire
- Models with removable, high-density polyethylene liner permit use with harsh, corrosive chemicals



27606



27716




| Description and Capacity | OD x H | Approv/Lstg Regulation | Red Model | Yellow Model | CA Prop 65 |
|--|----------------------------------|------------------------|-----------|--------------|------------|
| Dip Tanks | | | | | |
| 1 gallon (4 L) steel dip tank | 9.375 x 5.5 in (238 x 140 mm) | FM, TÜV | 27601 | 27611 | ⚠ |
| 2 gallon (8 L) steel dip tank | 9.375 x 10 in (238 x 254 mm) | | 27602 | 27612 | ⚠ |
| 3.5 gallon (13 L) steel dip tank | 11.375 x 11.25 in (289 x 286 mm) | | 27603 | 27613 | ⚠ |
| 5 gallon (19 L) steel dip tank | 13.75 x 13 in (349 x 330 mm) | | 27605 | 27606 | ⚠ |
| 8 gallon (30 L) steel dip tank | 15.625 x 14.25 in (397 x 362 mm) | | 27608 | 27618 | ⚠ |
| 5 gallon (19 L) steel dip tank with HDPE liner | 13.75 x 13 in (349 x 330 mm) | — | 27615 | 27616 | ⚠ |
| Wash Tanks | | | | | |
| 1 gallon (4 L) steel wash tank with basket | 9.375 x 10 in (238 x 254 mm) | FM, TÜV | 27711 | 27811 | ⚠ |
| 2 gallon (8 L) steel wash tank with basket | 11.375 x 11.25 in (289 x 286 mm) | | 27712 | 27812 | ⚠ |
| 3.5 gallon (13 L) steel wash tank with basket | 13.75 x 13 in (349 x 330 mm) | | 27713 | 27813 | ⚠ |
| 6 gallon (23 L) steel wash tank with basket | 15.625 x 14.25 in (397 x 362 mm) | | 27716 | 27816 | ⚠ |
| 3.5 gallon (13 L) steel wash tank with HDPE liner and basket | 13.75 x 13 in (349 x 330 mm) | — | 27723 | 27724 | ⚠ |

Parts basket simplifies cleaning small parts

| Parts Basket Model | Fits Tank Size (D x H) | Dip Tank | | Wash Tank | |
|--------------------|----------------------------------|----------|-------------------|-----------|-------------------|
| | | Model | Capacity | Model | Capacity |
| — | 9.375 x 5.5 in (238 x 140 mm) | 27601 | 1 gallon (4 L) | — | — |
| 27901 | 9.375 x 10 in (238 x 254 mm) | 27602 | 2 gallon (8 L) | 27711 | 1 gallon (4 L) |
| 27902 | 11.375 x 11.25 in (289 x 286 mm) | 27603 | 3.5 gallon (13 L) | 27712 | 2 gallon (8 L) |
| 27903 | 13.75 x 13 in (349 x 330 mm) | 27605 | 5 gallon (19 L) | 27713 | 3.5 gallon (13 L) |
| 27923 | 13.75 x 13 in (349 x 330 mm) | 27615 | 5 gallon (19 L) | 27723 | 3.5 gallon (13 L) |
| 27906 | 15.625 x 14.25 in (397 x 362 mm) | 27608 | 8 gallon (30 L) | 27716 | 6 gallon (23 L) |

Note: Tank sizes for dip and wash tanks are the exact same; however, liquid capacity differs when using a parts basket because the liquid volume is displaced by the basket.

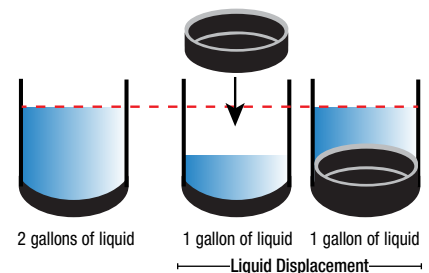

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Safety Rinse Tanks

Easily clean large parts with big-capacity rinse tanks—available in floor standing, benchtop and twin chamber styles

- Generously sized to immerse parts 16-in deep by 35-in wide (406-mm by 889-mm)
- All chambers feature a 0.75-in (19-mm) drain plug for easy solvent replacement
- Floor standing rinse tanks feature self-closing covers operated by foot treadle
 - Adjustable-rate pneumatic cylinder prevents cover from slamming shut when treadle is released
- Benchtop rinse tanks allow easy point-of-use access on workbenches
 - Lift-and-latch style cover includes a fusible link that melts under fire conditions to automatically close cover
- Twin chamber rinse tanks are divided between sections to permit cleaning heavy grime on one side, and using a clean solvent rinse on the other



Foot treadle opens the rinse tank cover, leaving hands free for cleaning.



27220



27110



27260



27311

| Floor Standing and Benchtop Rinse Tanks | Tank W x D x H | Overall Height | Approv/Lstg Regulation | Red Model | CA Prop 65 | Yellow Model | CA Prop 65 |
|--|--------------------|-------------------|------------------------|-----------|------------|--------------|------------|
| 11 gallon (42 L) steel floor standing rinse tank | 24 x 16 x 8.75 in | 32.75 in (832 mm) | FM | 27110 | ⚠ | — | — |
| 11 gallon (42 L) steel bench top rinse tank | 610 x 406 x 222 mm | 8.75 in (222 mm) | | 27311 | ⚠ | — | — |
| 22 gallon (83 L) steel floor standing rinse tank | 35.25 x 16 x 12 in | 32.75 in (832 mm) | | 27220 | ⚠ | 27221 | ⚠ |
| 22 gallon (83 L) steel bench top rinse tank | 895 x 406 x 305 mm | 12 in (305 mm) | | 27322 | ⚠ | — | — |

| Twin Chamber Rinse Tanks | Tank W x D x H | Overall Height | Approv/Lstg Regulation | Red Model | CA Prop 65 |
|---|---|-------------------|------------------------|-----------|------------|
| 2 x 4 gallon (8 x 15 L) steel floor standing rinse tank | 24 x 16 x 8.75 in (610 x 406 x 222 mm) | 32.75 in (832 mm) | FM | 27140 | ⚠ |
| 2 x 9 gallon (8 x 34 L) steel floor standing rinse tank | 35.25 x 16 x 12 in (895 x 406 x 305 mm) | | | 27260 | ⚠ |

| Accessories | L x W x D | Model |
|---|--|-------|
| Sediment screen for rinse tank models 27110, 27311 | 23 x 13.75 x 0.75 in (584 x 349 x 19 mm) | 27004 |
| Sediment screen for rinse tank models 27220, 27221, 27322 | 35 x 13.75 x 0.75 in (889 x 349 x 19 mm) | 27006 |
| Parts basket for rinse tank models 27110, 27311 | 16 x 13 x 4 in (406 x 330 x 102 mm) | 27003 |
| Parts basket for rinse tank models 27220, 27322 | 28 x 13 x 4 in (711 x 330 x 102 mm) | 27005 |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Smoking Receptacles

Supportive Solutions



Original Smoker's Cease Fire® Cigarette-Butt Receptacles

Enhance your business image and keep entrances clean from cigarette litter, with minimal maintenance

- Made of flame-retardant and sturdy polyethylene that won't rust, dent or crack
- Innovative self-extinguishing design safely collects unsightly cigarette litter and reduces the risk of fire
- Tie-down notches offer security and greater stability under severe weather conditions
- Units include a galvanized steel bucket that collects thousands of butts
- Personal Smoker's Cease-Fire features a compact design measuring 11-in diameter by 30-in high (762 x 279-mm)—suitable for lighter smoking traffic areas
- Optional disposable bucket liners available for maximum cleaning convenience—simply remove bag, tightly close it off and discard



Ideal for any establishment—clean grounds help maintain your business image.

Large covered head dissipates heat and keeps rain out


1-1/2-in (38-mm) opening easily accepts butts and discourages waste from being dropped in

Extinguishing spot

Molded-in graphics easily identify opening for cigarette butt disposal

Large internal neck cavity minimizes clogging

Broad 16-1/2-in (419-mm) base for stability

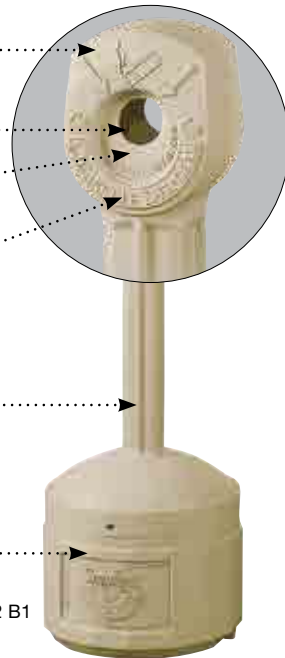

Patent: US 6,626,322 B1



| Description | Capacity | H x Dia | Approv/Lstg Regulation | Pewter Gray Model | Adobe Beige Model | Deco Black Model | Terra Cotta Model | Forest Green Model |
|---|-------------------|--------------------------------|------------------------|-------------------|-------------------|------------------|-------------------|--------------------|
| Original Smoker's Cease Fire® | 4 gallons 15 L | 38.5 x 16.5 in 978 x 419 mm | FM | 26800 | 26800B | 26800D | 26800T | 26800G |
| Personal Smoker's Cease Fire® | 1 gallon 4 L | 30 x 11 in 762 x 279 mm | | 26806 | 26806B | 26806D | 26806T | 26806G |
| Disposable bucket liner Original Smoker's Cease Fire® - 10 pack with twist ties. | | | FM* | 26827 | | | | |
| Bucket liner master pack for Original Smoker's Cease Fire® 25 packs of ten with twist ties | | | — | 26830 | | | | |

* The liner and smoker receptacle used together are an FM-approved system. The bucket liner is for hygienic purposes, and only for use within the Smoker's Cease-Fire® system.

Elite™ Smoker's Cease Fire® Cigarette-Butt Receptacles

Attractive contemporary styling with fire safe construction approved by FM Approvals

- Hides unsightly cigarette butts and reduces the risk of fire
- Polyethylene construction with stainless-steel snuffer discourages use of top to put out cigarette
- Removable steel pail with optional disposable bucket liner for easy cleaning—simply remove liner, tightly close and discard
- Optional cable kit available for severe weather or security



26827 / 26830



268503

268501

268502



Simply drop in lit cigarette or use perforated snuffer.

| Description | Color | H x Dia | Approv/Lstg Regulation | Capacity | Model |
|---|------------|---------------------------|------------------------|------------------|--------|
| Elite™ Smoker's | Cool Gray | 38 x 12 in (965 x 305 mm) | FM | 4 gallons (15 L) | 268501 |
| | Sierra Tan | | | | 268502 |
| | Deco Black | | | | 268503 |
| Anchoring cable kit | | | | | 268505 |
| Brass padlock | | | | | 268506 |
| Disposable bucket liner - 10 pack with twist ties. | | | FM* | — | 26827 |
| Liner master pack - 25 packs of ten with twist ties | | | | | 26830 |
| Replacement pail | | | | | 26802 |

* The liner and smoker receptacle used together are an FM-approved system. The bucket liner is for hygienic purposes, and only for use within the Smoker's Cease-Fire® system.

Heavy Duty Butt Cans

Position slim-styled, self-extinguishing smoking receptacles near entryways to encourage proper disposal

- Fire-safe galvanized steel two-piece base with neck features a tough powder coat finish to resist rust
- Polyethylene top keeps rain out
- Easy-to-empty by untwisting compression nut where neck meets the base—no separate screws to lose
- Perfect for outdoor industrial settings such as factories, backdoor entrances, alleyways, loading docks, and service and repair shops

| Description | H x Dia | Capacity | Safety Red Model |
|---------------------|---------------------------------|--------------------|------------------|
| Heavy duty butt can | 34 x 11.50 in (860 x 292 mm) | 2.50 gallons (9 L) | 26810R |
| | 38.50 x 11.50 in (980 x 292 mm) | 5 gallons (19 L) | 26811R |



26810R

26811R



Gas-Cylinder Handling Equipment

Dedicated



Why do I need special equipment for handling gas cylinders?

Compressed-gas-cylinders are inherently dangerous, heavy, and awkward to move and store. Improper handling could result in serious injuries and a broken valve could quickly turn the cylinder into a powerful rocket or devastating torpedo.

Minimize your risk for accidents with proper training and always consult the Safety Data Sheet (SDS) for information on the gases you will be using. Never compromise safety by using inferior equipment for transporting and storing industrial, medical, and commercial gases. Use quality, heavy-duty Justrite® gas-cylinder products to avoid potential injuries and incidents.

Ensure compliance with applicable regulations—key excerpts include:

| NFPA 55 | NFPA 1 | CGA P-1 | OSHA |
|------------|---------------|---------|--------------|
| 71.8.3 | 63.3.1.9.4 | 5.5 | 1926.350(a)7 |
| 71.8.4 | 63.3.1.9.5 | 5.6 | |
| 71.9.2 | 63.3.1.11.2.2 | 5.8.4 | |
| 7.1.11.2.2 | 63.3.3.3.2.2 | 6.4.3 | |
| 7.3.3.2.2 | 63.3.10.2 | | |

Types of gas-cylinder equipment

Hand Trucks:

- Single
- Double
- With firewall
- With hoist ring
- Lift-and-Load

Forkliftable:

- Pallets
- Barricade racks

Barricade Racks

Storage Stands and Process Stations:

- Floor mount stands
- Small gas-cylinder stands
- Process station

Carts and Mobile Stands:

- Over-the-road transport stand

Support Brackets:

- Wall mount
- Bench mount

Safety Snap Cap

Aluminum Cylinder Lockers:

- Vertical cylinder storage
- Horizontal LPG cylinder storage



■ Exceptional workmanship and unique features help you safely transport industrial, medical, and commercial use compressed gases with confidence and ease.

1. Triple grip push handle greatly enhances safety of top heavy loads by expanding grip area for improved leverage and swing radius
2. Steel encased Marinite® I* creates a one-hour fire barrier between the fuel and oxygen cylinders—exceeds minimum NFPA 55, NFPA 1, OSHA and CGA standards
3. Constructed using 1.25-in (32-mm) diameter round steel tube with continuous welding of optimum safety, strength, and longevity
4. Corrosion-resistant powder-coat finish throughout for long life and smooth handling
5. Tool box with integral lockable lid for torch storage
6. Locking posts and collar plates ensure total cylinder immobilization
7. Extensive structural framing with 0.375-in (10-mm) thick hoist plate permits safe lifting by hoist rigs to eliminate unauthorized access or theft
8. Exclusive vinyl bumper guard edging helps grip cylinder and reduces damaging scratches and dents. Durable 1.5-in (38-mm) wide poly straps with steel cinch buckles hold cylinders tightly in place. Welded loop chain provides a secondary means of securement. Two straps and one chain per cylinder.
9. Exclusive heavy-duty, 11-gauge (3-mm) floor plate with safety fins prevent warping or breakage. Unique zero-lift height eliminates need to lift cylinder during loading and unloading. Large 16-in (406-mm) pneumatic wheels have dual ball bearings for easier rolling—less effort required.



*Marinite® I is a registered trademark of BNZ Materials, Inc.

Single Gas-Cylinder Hand Trucks

Specially designed to load and transport heavy gas-cylinders and minimize accidents or injuries

- Constructed of 1-in (25-mm) and 1.25-in (32-mm) diameter steel tubing with continuous welding
- V-shaped cylinder support cradles keep cylinder secure, reducing cylinder rolling common in curved back designs
- Durable, 1.5-in (38-mm) wide poly straps with steel cinch buckles, lab tested to 1138-lb (516-kg), for safe transport
- Heavy-duty, 11-gauge (3-mm) floor plate with safety fins prevent warping or breaking
- Unique zero-lift height loading eliminates the need to lift cylinder during loading and unloading
- Corrosion-resistant powder-coat finish

Models 35004, 35006, and 35008 include 3-in (5-mm) swivel caster assemblies for stable transport—fold flat for storage.



Hand trucks feature heavy floor plate with zero-lift height load.

Four wheels for easier, safer transport.



| Max Cylinder Diameter in/mm | Wheel Type | Wheel Size in/mm | Rear Casters in/mm | H x W x D | Straps per Cylinder | Weight Capacity lb/kg | Approv/Lstg Regulation | Model |
|-----------------------------|----------------|------------------|--------------------|---------------------------------------|---------------------|-----------------------|------------------------|-------|
| 12/305 | Semi-pneumatic | 8/203 | — | 47 x 18 x 16 in (1194 x 457 x 406 mm) | 1 | 300/136 | O, C, G, A | 35000 |
| 12/305 | Pneumatic | 10.5/267 | — | 47 x 23 x 18 in (1194 x 584 x 457 mm) | 1 | 700/318 | | 35002 |
| 12/305 | Semi-pneumatic | 8/203 | 3/76 | 47 x 18 x 16 in (1194 x 457 x 406 mm) | 1 | 700/318 | | 35004 |
| 12/305 | Pneumatic | 10.5/267 | 3/76 | 47 x 21 x 19 in (1194 x 533 x 483 mm) | 1 | 1000/454 | | 35006 |
| 12/305 | Flat-free | 10/254 | 3/76 | 47 x 21 x 19 in (1194 x 533 x 483 mm) | 1 | 1000/454 | | 35008 |
| 18/457 | Pneumatic | 16/406 | — | 49 x 36 x 32 in (1245 x 914 x 813 mm) | 2 | 1000/454 | | 35010 |
| 18/457 | Flat-free | 10/254 | — | 49 x 36 x 32 in (1245 x 914 x 813 mm) | 2 | 700/318 | | 35012 |

Double Gas-Cylinder Hand Trucks

Never compromise safety when handling heavy compressed gas-cylinders—transport two gas cylinders and avoid accidents

- Constructed of 1-in (25-mm) and 1.25-in (32-mm) diameter steel tubing with continuous welding
- 11-gauge (3-mm) steel floor plate with safety fins prevents warping or breaking
- The unique zero-lift height floor plate lays flat, eliminates the need to lift cylinder during loading and unloading
- Corrosion-resistant powder coat finish for long life
- Heavy-duty 1.5-in (38-mm) wide poly straps, lab tested to 1138-lb (516-kg), with steel cinch buckles—eliminates potential cylinder rolling
- All main wheels have dual ball bearings for easier rolling—less effort required

Models 35032 and 35036 include wide-set, dual rear casters for increased stability and maneuverability.



Double cylinder hand truck holds gas-cylinders in place independently for improved safety.



Bumper guard vinyl edging reduces scratches/dents.

| Max Cylinder Diameter in/mm | Wheel Type | Wheel Size in/mm | Rear Casters in/mm | H x W x D | Straps per Cylinder | Weight Capacity lb/kg | Approv/Lstg Regulation | Model |
|-----------------------------|------------|------------------|--------------------|---------------------------------------|---------------------|-----------------------|------------------------|-------|
| (1) 10/254 (1) 13/330 | Pneumatic | 10.5/267 | — | 47 x 33 x 19 in (1194 x 838 x 483 mm) | 1 | 700/318 | O, C, G, A | 35028 |
| (1) 10/254 (1) 13/330 | Flat-free | 10/254 | — | 47 x 33 x 19 in (1194 x 838 x 483 mm) | 1 | 700/318 | | 35030 |
| (1) 10/254 (1) 13/330 | Pneumatic | 10.5/267 | 3/76 | 47 x 32 x 20 in (1194 x 800 x 508 mm) | 1 | 1000/454 | | 35032 |
| (1) 10/254 (1) 13/330 | Pneumatic | 16/406 | 5/127 | 47 x 34 x 27 in (1194 x 864 x 686 mm) | 1 | 1000/454 | | 35036 |
| (1) 10/254 (1) 13/330 | Steel | 20/508 | — | 47 x 32 x 27 in (1194 x 813 x 610 mm) | 1 | 600/272 | | 35020 |
| (1) 10/254 (1) 13/330 | Pneumatic | 16/406 | — | 47 x 34 x 27 in (1194 x 864 x 686 mm) | 1 | 1000/454 | | 35038 |

Accessories for Double-Cylinder Hand Trucks

| Description | H x W x D* | Model |
|--|-------------------------------------|-------|
| Tool tray attachment | 8 x 20 x 5 in (203 x 508 x 127 mm) | 35388 |
| Tool tray attachment with lockable lid | 8 x 20 x 5 in (203 x 508 x 127 mm) | 35386 |
| Cylinder locking post and collar, set of two | 43 x 4 x 8 in (1092 x 102 x 203 mm) | 35384 |

*Actual tool box dimensions are 5 x 20 x 5 in (203 x 508 x 127 mm)



Gas-Cylinder Hand Trucks with Firewall

Transport safely with one-hour fire barrier—designed for fuel and oxidizer cylinders used in welding applications

- Durable 1.25-in (32-mm) diameter steel tube construction with continuous welding
- 11-gauge (3-mm) steel floor plate made
- The zero-lift height eliminates need to lift cylinder during loading and unloading
- Corrosion-resistant powder-coat finish
- Heavy-duty 1.5-in (38-mm) wide poly straps, lab tested to 1138-lb (516-kg), with cinch buckles eliminate cylinder rolling potential. Secondary loop chains included.
- Triple-grip push handle enhances safety on top-heavy loads with improved leverage and swing radius
- Hoist-lift models include locking posts and collar plates and tool box attachment with integral lockable lid

Models 35044 and 35052 include 5-in (127-mm) wide-set, dual rear swivel casters for increased stability and maneuverability.



Firewalls exceed minimum separation requirements for extended storage of fuels and oxidizers in close proximity.



To eliminate unauthorized access or theft of gas-cylinders, construction sites often use a hand truck with hoist lift to suspend the unit.

| Max Cylinder Diameter in/mm | Wheel Type | Wheel Size in/mm | Rear Casters in/mm | Hoist Ring w/Locking Posts | Tool Box | H x W x D | Straps per Cylinder | Approv/Lstg Regulation | Weight Capacity lb/kg | Model |
|-----------------------------|------------|------------------|--------------------|----------------------------|----------|---------------------------------------|---------------------|------------------------|-----------------------|-------|
| (1) 10/254 (1) 13/330 | Pneumatic | 16/406 | — | — | — | 61 x 35 x 26 in (1549 x 889 x 660 mm) | 2 + Chain | O, C, G, A | 1000/454 | 35040 |
| (1) 10/254 (1) 13/330 | Pneumatic | 10.5/267 | — | — | — | 61 x 35 x 23 in (1549 x 889 x 584 mm) | 2 + Chain | | 700/318 | 35042 |
| (1) 10/254 (1) 13/330 | Pneumatic | 16/406 | 5/127 | — | — | 61 x 35 x 26 in (1549 x 889 x 660 mm) | 2 + Chain | | 1000/454 | 35044 |
| (1) 10/254 (1) 13/330 | Steel | 20/508 | — | — | — | 61 x 32 x 28 in (1549 x 813 x 711 mm) | 2 + Chain | | 600/272 | 35046 |
| (1) 10/254 (1) 13/330 | Steel | 20/508 | — | Yes | Yes | 64 x 32 x 28 in (1626 x 813 x 711 mm) | 2 + Chain | | 600/272 | 35048 |
| (1) 10/254 (1) 13/330 | Pneumatic | 16/406 | — | Yes | Yes | 64 x 35 x 26 in (1626 x 889 x 660 mm) | 2 + Chain | | 600/272 | 35050 |
| (1) 10/254 (1) 13/330 | Pneumatic | 16/406 | 5/127 | Yes | Yes | 64 x 35 x 26 in (1626 x 889 x 660 mm) | 2 + Chain | | 600/272 | 35052 |

Accessories for Gas-Cylinder Hand Trucks with Firewall

| Description | H x W x D* | Model |
|--|-------------------------------------|-------|
| Tool tray attachment | 8 x 20 x 5 in (203 x 508 x 127 mm) | 35388 |
| Tool box attachment with lockable lid | 8 x 20 x 5 in (203 x 508 x 127 mm) | 35386 |
| Cylinder locking post and collar, set of two | 43 x 4 x 8 in (1092 x 102 x 203 mm) | 35384 |

*Actual tool box dimensions are 5 x 20 x 5 in (203 x 508 x 127 mm)

74 Gas-Cylinder Handling Equipment

Gas-Cylinder Hand Trucks with Hoist Ring

Move gas-cylinders easily in construction locations with poor accessibility, or from floor-to-floor—good for welding gas-cylinders on jobsite

- Structural steel framing with 0.375-in (10-mm) thick hoist plates
- Fully welded construction using 1.25-in (32-mm) diameter steel tube
- 11-gauge (3-mm) steel floor plate
- Zero-lift height loading eliminates the need to lift cylinder during loading and unloading
- Triple-grip handle design helps control improved leverage and swing radius.
- Corrosion-resistant powder-coat finish throughout
- Two heavy-duty 1.5-in (38-mm) wide poly straps, lab tested to 1138-lb (516-kg), with steel cinch buckles eliminate cylinder rolling potential


Models 35022 and 35026 include dual rear swivel casters for increased stability and maneuverability—35022 also includes a tool tray. Caster carriage steel hinge bars for folding against rear of truck and easy storage.



Hoist rings for transport and lifting of cylinders, or lowering into hard-to-access areas such as boats and submarines.



- 1 – Robust hoist rig
- 2, 3, 4 – Triple grip handle to control heavy loads
- 5, 6 – Locking system with collar and post for total immobilization

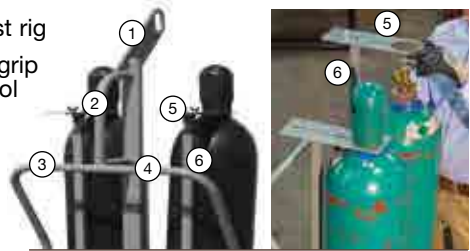

| Cylinder Capacity | Max Cylinder Diameter in/mm | Wheel Type | Wheel Size in/mm | Rear Casters in/mm | Tool Tray | H x W x D | Straps per Cylinder | Approv/ Lstg Regulation | Weight Capacity lb/kg | Model |
|-------------------|-----------------------------|------------|------------------|--------------------|---------------------------------------|---------------------------------------|---------------------|-------------------------|-----------------------|-------|
| 1 | 12/305 | Pneumatic | 10.5/267 | — | — | 70 x 21 x 19 in (1778 x 533 x 483 mm) | 2 | O, C, G, A | 300/136 | 35016 |
| 2 | (1) 10/254 (1) 13/330 | | | 3/76 | Yes | 69 x 35 x 22 in (1753 x 889 x 559 mm) | | | 600/272 | 35022 |
| | (1) 10/254 (1) 13/330 | | | — | — | 69 x 35 x 22 in (1753 x 889 x 559 mm) | | | 600/272 | 35024 |
| | (1) 10/254 (1) 13/330 | | | 3/76 | — | 69 x 35 x 22 in (1753 x 889 x 559 mm) | | | 600/272 | 35026 |
| | (1) 10/254 (1) 13/330 | Steel | 20/508 | — | 69 x 32 x 28 in (1753 x 813 x 711 mm) | 600/272 | | | 35018 | |
| | (1) 10/254 (1) 13/330 | Pneumatic | 16/406 | — | 69 x 35 x 26 in (1753 x 889 x 660 mm) | 600/272 | | | 35034 | |

Extra Accessories for Gas-Cylinder Hand Trucks with Hoist Ring

| Description | H x W x D* | Model |
|---------------------------------------|------------------------------------|-------|
| Tool tray attachment | 8 x 20 x 5 in (203 x 508 x 127 mm) | 35388 |
| Tool box attachment with lockable lid | 8 x 20 x 5 in (203 x 508 x 127 mm) | 35386 |

*Actual tool box dimensions are 5 x 20 x 5 in (203 x 508 x 127 mm)

Lift-and-Load Cylinder Hand Truck

Safely raise and position gas-cylinders using integral jack and hand crank

- Lift system with 11-inch (279-mm) extension makes lifting easy with approximately 10 turns of the crank per vertical inch
- Built-in clamping system with chain secures the cylinder for lifting and transport
- Pneumatic main wheels and rear swivel casters increase stability and maneuverability
- Fully welded construction
- Powder-coat finish



35054



Chain clamping system secures cylinder for lifting and transport



Lift-and-Load hand truck allows user to install heavy cylinders onto raised locations.

| Max Cylinder Diameter in/mm | Wheel Type | Wheel Size in/mm | Rear Casters in/mm | H x W x D | Approv/Lstg Regulation | Weight Capacity lb/kg | Model |
|-----------------------------|------------|------------------|--------------------|---------------------------------------|------------------------|-----------------------|-------|
| 12/305 | Pneumatic | 10.5/267 | 3/76 | 56 x 22 x 20 in (1422 x 559 x 508 mm) | O, C, G, A | 1000/454 | 35054 |

Safety Snap Cap for Gas-Cylinders

Protect and limit access to valve control

- Meets ISO 11117, DOT 49 CFR, CSA B340, and CGA V-9
- Fits most North American gas-cylinders
- Provides a lockout device that prevents unauthorized use—includes brass padlock
- Welded steel construction and powder-coat finish provides many years of use



Easily access the valve without having to remove the cap or regulator

| Description | H x W x D | Approv/Lstg Regulation | Model |
|--|-------------------------------------|------------------------|-------|
| High pressure, fine thread, 3.125 in x 11UN | 7.5 x 5 x 4 in (191 x 127 x 102 mm) | O, C, G, A | 35358 |
| Low pressure, fine thread, 3.5 in x 11UN | | | 35360 |
| High pressure, coarse thread, 3.125 in x 7UN | | | 35362 |
| Low pressure, coarse thread, 3.5 in x 8UN | | | 35364 |


Gas-Cylinder Barricade Racks

Recommended for indoor or outdoor bulk cylinder storage—meet USGS high-hazard seismic zone requirements when properly mounted

- Square steel structural tubing—continuously seam welded at all junction points
- Exterior-grade powder-coat finish for durability and corrosion resistance
- Tops ground smooth and HDPE end caps prevent and injuries.
- Two levels of steel chains for each cylinder to the rack
- Pre-drilled holes for floor mounting
- For seismic installations, add model 35350 S4-rated anchor bolts (sold separately).
- For applications where both fuels and oxidizers are stored near one another, use a one-hour fire barrier between barricade racks



Secure and store cylinders in a barricade rack—visually inspect on a routine basis for any indication of leakage or problems.

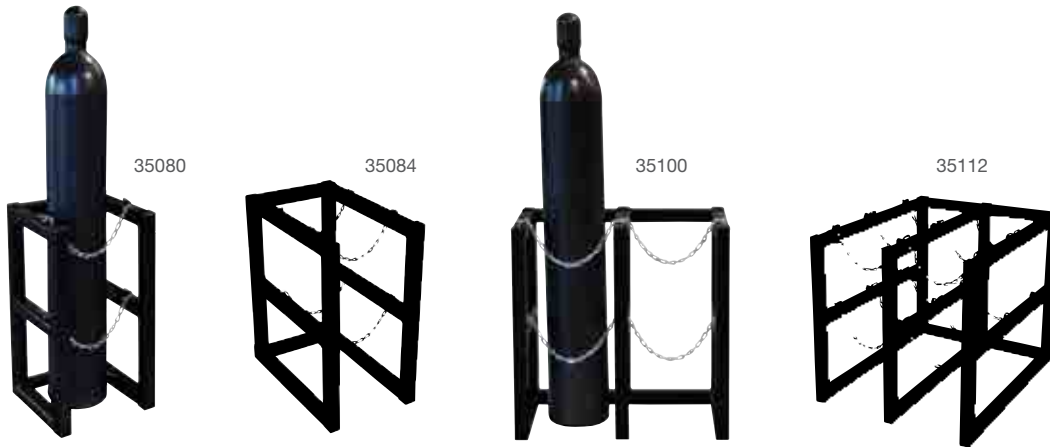

| Cylinder Capacity | Max Cylinder Diameter in/mm | Cylinder Orientation W x D | Mount Holes | H x W x D | Approv/Lstg Regulation | Model |
|-------------------|-----------------------------|----------------------------|-------------|---------------------------------------|------------------------|-------|
| 1 | 12/305 | 1 x 1 | 3 | 30 x 16 x 16 in (762 x 406 x 406 mm) | O, C, G, A, U | 35080 |
| 2 | 12/305 | 1 x 2 | 4 | 30 x 16 x 26 in (762 x 406 x 660 mm) | | 35084 |
| 3 | 12/305 | 1 x 3 | 4 | 30 x 16 x 38 in (762 x 406 x 965 mm) | | 35090 |
| 4 | 12/305 | 1 x 4 | 4 | 30 x 16 x 50 in (762 x 406 x 1270 mm) | | 35096 |
| 2 | 12/305 | 2 x 1 | 3 | 30 x 30 x 16 in (762 x 762 x 406 mm) | O, C, G, A, U | 35100 |
| 4 | 12/305 | 2 x 2 | 6 | 30 x 30 x 26 in (762 x 762 x 660 mm) | | 35106 |
| 6 | 12/305 | 2 x 3 | 6 | 30 x 30 x 38 in (762 x 762 x 965 mm) | | 35112 |
| 8 | 12/305 | 2 x 4 | 6 | 30 x 30 x 50 in (762 x 762 x 1270 mm) | | 35118 |

See next page for more sizes.




End tops are capped with high-density polyethylene caps to reduce injuries from sharp edges while preventing dirt build-up and corrosion inside tube for a clean, quality look.




35122



35106



35188



35150



35172

Custom-made barricade racks

Options include stainless steel construction, process rails, and fire barriers attached to racks.

Visit justrite.com



Gas-Cylinder Barricade Racks (continued)

| Cylinder Capacity | Max Cylinder Diameter in/mm | Cylinder Orientation W x D | Mount Holes | H x W x D | Approv/Lstg Regulation | Model |
|-------------------|-----------------------------|----------------------------|-------------|--|------------------------|-------|
| 3 | 12/305 | 3 x 1 | 4 | 30 x 44 x 16 in (762 x 1118 x 406 mm) | O, C, G, A, U | 35122 |
| 6 | 12/305 | 3 x 2 | 8 | 30 x 44 x 26 in (762 x 1118 x 660 mm) | | 35128 |
| 9 | 12/305 | 3 x 3 | 8 | 30 x 44 x 38 in (762 x 1118 x 965 mm) | | 35134 |
| 12 | 12/305 | 3 x 4 | 8 | 30 x 44 x 50 in (762 x 1118 x 1270 mm) | | 35140 |
| 4 | 12/305 | 4 x 1 | 5 | 30 x 58 x 16 in (762 x 1473 x 406 mm) | O, C, G, A, U | 35144 |
| 8 | 12/305 | 4 x 2 | 10 | 30 x 58 x 26 in (762 x 1473 x 660 mm) | | 35150 |
| 12 | 12/305 | 4 x 3 | 10 | 30 x 58 x 38 in (762 x 1473 x 965 mm) | | 35156 |
| 16 | 12/305 | 4 x 4 | 10 | 30 x 58 x 50 in (762 x 1473 x 1270 mm) | | 35162 |
| 5 | 12/305 | 5 x 1 | 6 | 30 x 70 x 16 in (762 x 1778 x 406 mm) | O, C, G, A, U | 35166 |
| 10 | 12/305 | 5 x 2 | 12 | 30 x 70 x 26 in (762 x 1778 x 660 mm) | | 35172 |
| 15 | 12/305 | 5 x 3 | 12 | 30 x 70 x 38 in (762 x 1778 x 965 mm) | | 35178 |
| 20 | 12/305 | 5 x 4 | 12 | 30 x 70 x 50 in (762 x 1778 x 1016 mm) | | 35182 |
| 1 | 22/559 | 1 x 1 | 4 | 40 x 28 x 26 in (1016 x 711 x 660 mm) | O, C, G, A, U | 35186 |
| 1 | 33/305 | 1 x 1 | 4 | 40 x 38 x 36 in (1016 x 965 x 914 mm) | | 35184 |
| 2 | 22/559 | 2 x 1 | 6 | 40 x 54 x 26 in (1016 x 1372 x 660 mm) | | 35188 |
| 2 | 33/305 | 2 x 1 | 6 | 40 x 74 x 36 in (1016 x 1880 x 914 mm) | | 35190 |

Extra Accessories for Barricade Racks

| Description | H x W x D | Model |
|--|---------------------------------------|-------|
| Seismic-rated anchor, package of 1 | 0.5 in OD x 5.5 in (8 mm OD x 127 mm) | 35350 |
| One-hour fire barrier, one cylinder deep | 60 x 12 x 2 in (1524 x 305 x 51 mm) | 35352 |
| One-hour fire barrier, two cylinders deep | 75 x 28 x 2 in (1905 x 711 x 51 mm) | 35354 |
| One-hour fire barrier, four cylinders deep | 75 x 52 x 2 in (1905 x 1321 x 51 mm) | 35356 |



35350 Seismic anchor


Cylinder Forklift and Barricade Rack Pallets

Transport multiple gas cylinders securely with a forklift – heavy-gauge, powder-coated steel construction ensures longevity and chemical resistance

- **Pallet models:** 7.75-in wide (197-mm) forklift channels with two-way access; includes a 10,000-lb (4,536-kg) DOT compliant strap that attaches to frame at 12-, 24- or 36-in (305-, 610- or 915-mm) from the deck.
- **Model 35222** incorporates a one-hour fire-rated barrier for storage of fuels and oxidizers near each other.
- **Forklift barricade rack models:** rectangular steel tube with two levels of steel chains for each cylinder; hinged ramp for easy loading and unloading. Tops ground smooth and capped with HDPE prevent corrosion and injuries.
- **Individually-secured cylinder models:** heavy-duty 1.5-in (38-mm) wide poly straps, tested to 1138-lb (516-kg), feature steel cinch buckles for secure attachment of cylinder—two straps per cylinder
- **Low-profile model 35230** makes cylinder loading easier. Optional 41-in (1041-mm) chain set, model **35366**, for a secondary means of support.



Model 35222 forklift barricade rack with one-hour firewall permits storage of fuels and oxidizers in close proximity of each other.



| Cylinder Capacity | Max Cylinder Diameter in/mm | Cylinder(s)/ Load Type | Ramp | Securement Style | H x W x D* | Approv/Lstg Regulation | Weight Capacity lb/kg | Model |
|-------------------|-----------------------------|--------------------------|------|-----------------------------|--|------------------------|-----------------------|-------|
| 6 (1) | 9/229 (21/534) | Multiple end | — | Ratchet strap x 1 | 38 x 24 x 36 in (965 x 610 x 914 mm) | O, C, G, A | 2400/1089 | 35210 |
| 6 (1) | 9/229 (21/534) | Multiple end | Yes | | 38 x 24 x 54 in (965 x 610 x 1372 mm) | | 2400/1089 | 35212 |
| 14 (2) | 9/229 (21/534) | Multiple end | — | | 38 x 32 x 48 in (965 x 813 x 1219 mm) | | 3600/1633 | 35214 |
| 14 (2) | 9/229 (21/534) | Multiple end | Yes | | 38 x 32 x 66 in (965 x 813 x 1676 mm) | | 3600/1633 | 35216 |
| 21 (4) | 9/229 (21/534) | Multiple end | — | | 38 x 48 x 48 in (965 x 1219 x 1219 mm) | | 6000/2722 | 35218 |
| 21 (4) | 9/229 (21/534) | Multiple end | Yes | | 38 x 48 x 66 in (965 x 1219 x 1676 mm) | | 6000/2722 | 35220 |
| 12 (2) | 9/229 (21/534) | Multiple back to back | — | Ratchet strap x 2 | 78 x 32 x 48 in (1981 x 813 x 1219 mm) | | 4000/1814 | 35222 |
| 6 | 10/254 | Barricade | Yes | 2 Chains per cylinder | 37 x 24 x 54 in (940 x 610 x 1372 mm) | | 1800/816 | 35224 |
| 12 | 11/279 | Barricade | Yes | | 33 x 48 x 66 in (838 x 1219 x 1676 mm) | | 3600/1633 | 35226 |
| 2 | 12/305 | Individual end | — | 2 Poly straps w/steel cinch | 33 x 24 x 24 in (838 x 610 x 610 mm) | | 800/363 | 35228 |
| 4 | 12/305 | Low profile back to back | — | | 32 x 39 x 24 in (813 x 991 x 610 mm) | | 1200/544 | 35230 |
| 4 | 12/305 | Individual back to back | — | | 34 x 24 x 36 in (864 x 610 x 914 mm) | | 1200/544 | 35232 |
| 6 | 12/305 | Individual back to back | — | | 34 x 24 x 36 in (864 x 610 x 914 mm) | 1800/816 | 35234 | |

*Where applicable, dimensions shown with ramp deployed. *Marinrite® I is a registered trademark of BNZ Materials, Inc.

Gas-Cylinder Support Brackets

Secure multiple gas-cylinders to wall or bench for safe and compliant storage

- Brackets accept cylinder sizes ranging from 4- to 12-in (102- to 305-mm) and 9- to 16-in (229- to 407-mm)
- Bumper guard edging with steel reinforced vinyl protects cylinders from damage while providing extra grip
- Constructed from heavy-gauge powder-coated steel, or unfinished stainless steel
- For bench mounting, use models to clamp to tables from 1- to 2.75-in (26 to 70-mm) thick
- Heavy-duty polypropylene support straps, 1.5-in (38-mm) wide and rated at 1138-lb (516-kg), feature steel cinch buckle and hold individual cylinders securely against bracket
- Stainless steel brackets use a nylon side latch buckle to protect against corrosion



Secure gas-cylinders to wall or bench to prevent tipping.

Wall mount



Bench mount



35256 HDPE bracket



35254

| Cylinder Capacity | Max Cylinder Diameter in/mm | Mount Type | Material | H x W x D | Straps Per Cylinder | Approv/Lstg Regulation | Model |
|-------------------|-----------------------------|------------|-----------------|---|---------------------|------------------------|-------|
| 1 | 12/305 | Wall | Steel | 4.25 x 8 x 2.25 in (108 x 203 x 57 mm) | 1 | O, C, G, A | 35250 |
| | 12/305 | | Stainless steel | 4.25 x 8 x 2.25 in (108 x 203 x 57 mm) | 1 | | 35252 |
| | 12/305 | | Steel | 4.25 x 8 x 2.25 in (108 x 203 x 57 mm) | 1 + Chain | | 35254 |
| | 12/305 | | HDPE | 4 x 10.375 x 2.5 in (108 x 264 x 64 mm) | 1 + Chain | | 35256 |
| | 12/305 | Bench | Steel | 4.25 x 8 x 4 in (108 x 203 x 102 mm) | 1 | | 35258 |
| | 12/305 | Bench | Stainless steel | 4.25 x 8 x 4.25 in (108 x 203 x 108 mm) | 1 | | 35260 |
| | 16/407 | Wall | Steel | 4.25 x 18 x 2.25 in (108 x 457 x 57 mm) | 1 | | 35262 |

See next page for more sizes.

Extra Accessories for Gas-Cylinder Support Brackets

| Description | Material | Model |
|--|-----------------|-------|
| Chain, one-piece, 41 in (1041 mm) long | Steel | 35366 |
| | Stainless steel | 35368 |




80 Gas-Cylinder Handling Equipment



All compressed gas-cylinders in service or in storage at user locations should be secured to prevent falling or rolling.



Straps with cinch buckle tightens to hold individual cylinders securely.

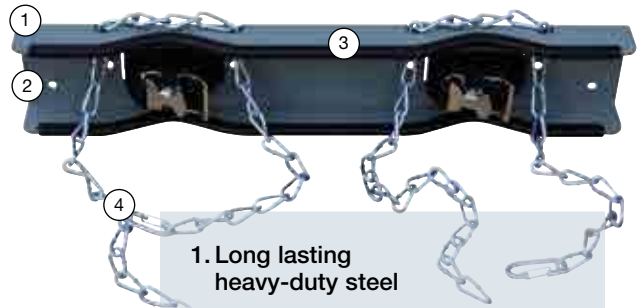

1. Long lasting heavy-duty steel
2. Smooth powder-paint finish for corrosion and chemical resistance
3. Exclusive bumper guard edging grips and protects cylinders
4. Chains provide a secondary support, extra safety



35276



35264

Gas-Cylinder Support Brackets (continued)

| Cylinder Capacity | Max Cylinder Diameter in/mm | Mount Type | Material | H x W x D | Straps Per Cylinder | Approv/Lstg Regulation | Model |
|-------------------|-----------------------------|------------|---|--|---------------------|------------------------|-------|
| 2 | 12/305 | Wall | Steel | 4 x 23.75 x 2 in (108 x 603 x 57 mm) | 1 | O, C, G, A | 35264 |
| | | | Stainless steel | 4.25 x 23.75 x 2.25 in (108 x 603 x 57 mm) | | | 35266 |
| | | Bench | Steel | 4.25 x 23.75 x 2.25 in (108 x 603 x 57 mm) | 1 + Chain | | 35268 |
| | | | Stainless steel | 4.25 x 23.75 x 4 in (108 x 203 x 102 mm) | 1 | | 35270 |
| 3 | Wall | Steel | 4.25 x 35.75 x 2.25 in (108 x 908 x 57 mm) | 1 | 35272 | | |
| 4 | | Steel | 4.25 x 48.75 x 2.25 in (108 x 1238 x 57 mm) | | 35274 | | |
| | | | | | | | 35276 |

Gas-Cylinder Storage Stands

Floor-mounted stands provide safe and secure storage options for one or more containers

- Fully welded construction using 11-gauge (3-mm) steel or 12-gauge (2-mm) stainless steel
- Exclusive bumper guard edging with steel reinforced vinyl
- Most stands store cylinders from 4- to 12-in (102 to 305-mm) in diameter. Low profile model 35282 accepts cylinders up to 10-in (254-mm) and features a 0.187-in (5-mm) thick steel clamping bar protected with an edge bumper guard.
- Pre-drilled holes in base designed for floor mounting
- Heavy-duty support straps, rated at 1138-lb (516-kg), feature steel cinch buckle and hold cylinders securely to prevent tipping. Stainless steel models use a nylon side latch buckle to protect against corrosion.



Mount model 35288 to floor and independently strap two cylinders securely to stand to prevent dangerous tipping accidents.



| Cylinder Capacity | Max Cylinder Diameter in/mm | Mount Type/Orientation | Material | H x W x D | Straps Per Cylinder | Approv/Lstg Regulation | Model |
|-------------------|-----------------------------|------------------------|-----------------|--|---------------------|------------------------|-------|
| 1 | 12/305 | Floor | Steel | 30 x 18 x 13.75 in (762 x 457 x 349 mm) | 2 | O, C, G, A | 35278 |
| | | | Stainless steel | 30 x 18 x 13.75 in (762 x 457 x 349 mm) | | | 35280 |
| 2 | 12/305 | Floor | Steel | 15 x 16 x 16 in (381 x 406 x 406 mm) | 1 + Clamp bar | | 35282 |
| | | | Stainless steel | 30 x 27.75 x 10.5 in (762 x 705 x 267 mm) | | | 35288 |
| 3 | 12/305 | Floor | Stainless steel | 30 x 27.75 x 10.5 in (762 x 705 x 267 mm) | 1 | | 35290 |
| 3 | 12/305 | | | 30 x 39.75 x 10.5 in (762 x 1010 x 267 mm) | | | 35294 |
| 4 | 12/305 | Floor back to back | Steel | 30 x 32 x 23 in (762 x 813 x 584 mm) | 2 | 35296 | |
| | 12/305 | Floor | | 30 x 52 x 14 in (762 x 1321 x 356 mm) | | 35298 | |
| 6 | 12/305 | Floor back to back | | 30 x 44 x 23 in (762 x 1118 x 584 mm) | | 35300 | |
| | | | | 30 x 56 x 23 in (762 x 1422 x 584 mm) | | 35302 | |

*Extra Accessories for Gas-Cylinder Support Stands

| Description | Material | Model No |
|--|-----------------|----------|
| Chain, one-piece, 41 in (1041 mm) long | Steel | 35366 |
| | Stainless steel | 35368 |



*Not applicable for model 35282

Gas-Cylinder Process Stations

Prevent dangerous tipping accidents—secure gas cylinders with easy-to-reach control mounting panels for gas distribution

- Fully welded construction using 11-gauge (3-mm) steel
- Store cylinders from 4- to 12-in (102- to 305-mm) in diameter
- Powder-coated finish
- Exclusive bumper guard edging with steel reinforced vinyl protects your cylinders from damage while providing extra grip
- Pre-drilled holes in base designed for floor mounting
- Heavy-duty support straps, 1.5-in (38-mm) wide and rated at 1138-lb (516-kg), feature steel cinch buckle
- Most stands include openings to retrofit secondary support chains, one set for each cylinder station. Add model 35366 for optional steel chain.
- Heavy-duty size 2/0 steel chains lay flat against the cylinders for a tight fit



Process rack model 35314 accepts three cylinders per side. Add cylinder controls or cross-over devices on top panel for safe gas distribution.



35306



35310



35304

Custom Designed Process Control Station



Before



After

Photos courtesy of Praxair Specialty Gases

| Cylinder Capacity | Max Cylinder Diameter in/mm | Mount Type/Orientation | Control Mount Type | H x W x D | Straps Per Cylinder | Approv/Lstg Regulation | Model | | |
|-------------------|-----------------------------|------------------------|--------------------|--|---------------------|------------------------|--|---|-------|
| 1 | 12/305 | Floor | Panel | 72 x 18 x 13.75 in (1829 x 457 x 349 mm) | 2 | O, C, G, A | 35304 | | |
| 2 | | | | 72 x 28 x 10.5 in (1829 x 705 x 267 mm) | 1 | | 35306 | | |
| 3 | | | | 72 x 40 x 10.5 in (1829 x 1016 x 267 mm) | 1 | | 35308 | | |
| 4 | | | Dual struts | 72 x 52 x 14 in (1829 x 1321 x 356 mm) | 2 | | 35310 | | |
| 4 | | | | Floor back to back | Panel | | 72 x 32 x 23 in (1829 x 813 x 584 mm) | 2 | 35312 |
| 6 | | | | | Panel | | 72 x 44 x 23 in (1829 x 1118 x 584 mm) | 2 | 35314 |

Extra Accessories for Gas-Cylinder Process Stands

| Description | Model |
|--|-------|
| Chain, one-piece, 41 in (1041 mm) long | 35366 |



35366

Gas-Cylinder Carts and Mobile Stands

Heavy-duty steel construction for safe transport of compressed gas

- For cylinders from 4- to 12-in diameter
- Exclusive bumper guard edging with reinforced vinyl protects cylinders while providing extra grip
- Heavy-duty support straps, rated at 1138-lb, feature steel cinch buckle and hold cylinders securely
- Powder-coated steel parts
- Carts include upper and lower brackets for added support and security
- Mobile stands—suitable for over-the-road gas-cylinder transportation. Locking collar and post system adds vise-like holding capability. Use of safety cylinder caps ensures DOT compliance. Locking post extends up to 66-in (1677-mm) in height.
- Order **model 35366** to get heavy-duty size 2/0 chain(s) with twist link for highest level of safety on any installation



Model 35286 cylinder stand features a locking collar and post system to immobilize cylinder for safe over-the-road transport.



| Cylinder Capacity | Max Cylinder Diameter in/mm | Type | Locking Post(s) | H x W x D | Straps Per Cylinder | Approv/Lstg Regulation | Weight Capacity lb/kg | Model |
|-------------------|-----------------------------|-------|-----------------|--|---------------------|------------------------|-----------------------|-------|
| 4 | 12/305 | Cart | — | 72 x 18 x 13.75 in (1829 x 457 x 349 mm) | 2 | O, C, G, A | 1600/726 | 35056 |
| 6 | 12/305 | Cart | — | 72 x 18 x 13.75 in (1829 x 457 x 349 mm) | | | 2000/907 | 35058 |
| 1 | 10/254 | Stand | Yes | 41 x 16.25 x 10.5 in (1041 x 413 x 267 mm) | 2 | O, C, G, A | — | 35286 |
| 2 | 10/254 | Stand | Yes | 41 x 27.75 x 10.5 in (1041 x 705 x 267 mm) | | | — | 35292 |

Extra Accessories for Gas-Cylinder Carts and Mobile Stands

| Description | Model |
|--|-------|
| Chain, one-piece, 41 in (1041 mm) long | 35366 |



Aluminum Cylinder Lockers

No rust solution—100% welded aluminum construction won't rust, corrode or discolor

- Heavy gauge, 0.065-in (1.65-mm) thick aluminum mesh and extruded (not bent) frame add rigidity to these cylinder lockers
- Solid roof panel slopes to back to shed water and ice
- Ships fully assembled—saves set-up time
- Wire mesh sides prevent dangerous buildup of flammable gases
- Thick metal panels and welded security lug (order padlock separately) on front panel deter tampering.
- Includes four labels—two warning and full/empty cylinder identification
- Lockers meet NFPA 58 for LPG storage and OSHA 1910.110 regulations. LPG vertical lockers (see next page) also comply with Canadian Standards Association CSA-B149.2



Durable, weather resistant aluminum construction offers long-lasting, safe storage of LPG and compressed gas-cylinders.



23007



23006



23005




23003


Horizontal LPG Cylinders




4 Cylinders
23001




6 Cylinders
23002



8 Cylinders
23003



12 Cylinders
23004




16 Cylinders
23005


Vertical LPG Cylinders



4 Cylinders
23009




8 Cylinders
23010




16 Cylinders
23011

Vertical Compressed gas-cylinders




5 to 10 Cylinders
23006




10 to 20 Cylinders
23007

Combination Horizontal and Vertical Locker LPG and Compressed gas-cylinders



Vertical 5-10 Cylinders / Horizontal 8 Cylinders
23008

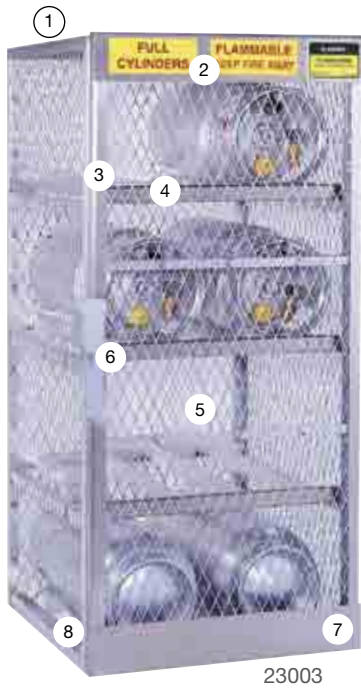

1. Sloped roof design sheds water and ice. Solid top reinforces stability
2. Includes warning and identification labels
3. Extruded 0.125-in (3-mm) thick, heavy aluminum framework provides superior strength
4. Easy-to-use rack positions cylinders securely and stores 20- and 33-lb (9- and 15- kg) cylinders
5. Heavy, expanded, 0.065-in (1.65-mm) thick aluminum mesh panels and all-welded construction resist abusive outdoor elements—won't rust or discolor
6. Padlock lug for security
7. A pre-drilled hole at each corner accepts 0.5-in (12.7-mm) anchor bolts
8. Cylinders stay clear of ground with heavy-duty bottom rack on horizontal locker or strong floor plate on vertical storage locker

23003



23010



23008



23009



23011

Aluminum Cylinder Lockers (continued)

| Description | Cylinder Type | Capacities | Exterior H x W x D | Racks | Model |
|-----------------------------|----------------------|--|--|-------|-------|
| 4-cylinder horizontal | LPG | Four 20 or 33 lb cylinders (9 or 15 kg) | 33.5 x 30 x 32 in (851 x 762 x 813 mm) | 1 | 23001 |
| 6-cylinder horizontal | | Six 20 or 33 lb cylinders (9 or 15 kg) | 49.5 x 30 x 32 in (1257 x 762 x 813 mm) | 2 | 23002 |
| 8-cylinder horizontal | | Eight 20 or 33 lb cylinders (9 or 15 kg) | 65 x 30 x 32 in (1651 x 762 x 813 mm) | 3 | 23003 |
| 12-cylinder horizontal | | Twelve 20 or 33 lb cylinders (9 or 15 kg) | 49.5 x 60 x 32 in (1257 x 1524 x 813 mm) | 4 | 23004 |
| 16-cylinder horizontal | | Sixteen 20 or 33 lb cylinders (9 or 15 kg) | 65 x 60 x 32 in (1651 x 1524 x 813 mm) | 6 | 23005 |
| 4-cylinder vertical | | Four 20 or 33 lb cylinders (9 or 15 kg) | 33.5 x 30 x 32 in (851 x 762 x 813 mm) | — | 23009 |
| 8-cylinder vertical | LPG | Eight 20 or 33 lb cylinders (9 or 15 kg) | 65 x 30 x 32 in (1651 x 762 x 813 mm) | 1 | 23010 |
| 16-cylinder vertical | | Sixteen 20 or 33 lb cylinders (9 or 15 kg) | 65 x 60 x 32 in (1651 x 1524 x 813 mm) | 2 | 23011 |
| 10-cylinder vertical | Compressed gas | Up to 10 cylinders | 65 x 30 x 32 in (1651 x 762 x 813 mm) | — | 23006 |
| 20-cylinder vertical | | Up to 20 cylinders | 65 x 60 x 32 in (1651 x 1524 x 813 mm) | — | 23007 |
| Combo horizontal & vertical | LPG & compressed gas | Up to 8 horizontal and 10 vertical cylinders | 65 x 60 x 32 in (1651 x 1524 x 813 mm) | 3 | 23008 |

Small Gas-Cylinder Stands

Benchtop stands for storage and transport of smaller specialty gas-cylinders commonly used in laboratories

- Sized to fit calibration gases or medical oxygen in laboratories
- Stands have pre-drilled holes for wall or benchtop mounting
- PVC stands fit 2- or 3-in calibration gas, lecture bottles (LB) and oxygen cylinders. Pre-drilled mounting holes. Models 35318 and 35320 require mounting for proper functionality. Model 35322 functions as a six-cylinder carrier for transporting within a laboratory.
- Steel stands—corrosion resistant power-coated finish. Used for medical oxygen or calibration gases.

Model 35326 — 3.25- to 4.25-in (83- to 108-mm) bottles
Model 35328 — 5.75- to 6.75-in (146- to 172-mm) bottles
Model 35330 — 7.75- to 8.75-in (191- to 222-mm) bottles



35322



35316

35318

35320

35326

35328

| Cylinder Capacity | Max Cylinder Diameter in/mm | Type | Material | H x W x D | Approv/Lstg Regulation | Model |
|-------------------|-----------------------------|---|----------|---|---|---------------------------------------|
| 1 | 2/51 | Bench | PVC | 5 x 7.75 x 7.75 in (127 x 197 x 197 mm) | O, C, G, A | 35316 |
| 1 | | Wall / Bench | | 7.5 x 5 x 4 in (191 x 127 x 102 mm) | | 35318 |
| 3 | | Wall / Bench | | 7.5 x 11 x 4 in (191 x 279 x 102 mm) | | 35320 |
| 6 | | Carrier | | 19 x 9 x 6 in (483 x 229 x 152 mm) | | 35322 |
| 6 | 3/76 | Bench | Steel | 6 x 7.75 x 7.75 in (152 x 197 x 197 mm) | | 35324 |
| 1 | | | | 4.25/108 | | 7 x 9.5 x 9.5 in (178 x 241 x 241 mm) |
| | | | | 6.75/172 | 7 x 14.5 x 14.5 in (178 x 368 x 368 mm) | 35328 |
| | 8.75/222 | 7 x 16.5 x 16.5 in (178 x 419 x 419 mm) | 35330 | | | |

Drum Funnels & Equipment

Responsive



Safety Drum Funnels

Prevent spills when transferring flammable solvents, thinners, oils or paint wastes—self-closing lid in case of fire

- Wide-mouth, galvanized steel with durable powder-coat finish
- Models 08207 and 08205 include a built-in brass flame arrester that absorbs and dissipates heat, preventing any external ignition source from reaching the drum’s content. Model 08205 with a longer flame arrester provides greater liquid flow.
- For collection of viscous flammables or non-flammable liquids, use model 08208 fitted with a long open-ended brass tube to direct liquid flow
- Model 08203 prevents spillage from tip-over accidents and offers the same protection as drum funnel 08207 above, but includes an integral self-closing ball valve to prevent content spillage. System includes a brass vent to provide pressure and vacuum relief.
- FM-approved. EPA and OSHA compliant



Proper bonding and grounding techniques prevent static discharge and the potential for fire.



Pushing down handle opens ball valve to release liquid into drum.



| Description | Funnel Dia x H | NPT/NPS | Approv/Lstg Regulation | Red Funnel Model | CA Prop 65 | Yellow Funnel Model | CA Prop 65 |
|--|-------------------------------|--|------------------------|------------------|------------|---------------------|------------|
| Safety drum funnel with self-closing cover and 6 in (152 mm) flame arrester | 10.75 x 10 in 273 x 254 mm | 2 in (DN50) | FM, TÜV | 08207 | ⚠ | 08227 | ⚠ |
| Safety drum funnel with self-closing cover and 32 in (813 mm) flame arrester | | | | 08205 | ⚠ | 08206 | ⚠ |
| Safety drum funnel with self-closing cover and 33 in (838 mm) brass tube | | | | 08208 | ⚠ | — | |
| Safety drum funnel 08207 with tip-over protection system | — | 2 in (DN50) and 0.75 in (DN20) vent | FM | 08203 | ⚠ | — | |
| Tip-over protection kit only for use with 08207 or 08205 | | | FM | 08214 | ⚠ | — | |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Safety Drum Vents and Fill Vents

Prevent dangerous drum failure while storing flammables—relieve pressure build-up due to heat

- Vents automatically relieve pressure between 3 and 8 psi (30 to 55 kPa) and include a flame arrester
- Vacuum relief during sudden cooling or liquid drain-off
- Valve within the vent is tested to allow 61 cubic inch (1 L) of water through a .375-in (9.5-mm) pipe nipple in less than 6 seconds for vacuum relief during drum dispensing operations
- Vacuum relief is automatic on vertically-installed vents and manual on horizontally-installed vents

Drum vent with Aerosolv® filter

- For vertically-stored drums and has the same protection features of auto venting, auto vacuum relief, and a flame arrester as found in our traditional safety vents—with the addition of a replaceable filter to control fugitive emissions
- Brass body with an activated carbon filter adsorbs vapors and captures VOCs. Use replacement filters when filter reaches full capacity, or odors are present (approximately 90-120 days).

Safety fill vents and funnels

- For vertically-stored drums
- Brass vent provides automatic pressure and vacuum relief
- Model 08204 includes a brass cap with safety chain tethered to the vent to prevent misplacement or loss
- Model 08211 includes a 9-in (229-mm) wide polyethylene funnel to facilitate solvent waste disposal and reduce spillage
- Six-in (152-mm) flame arrester safely dissipates heat and prevents flashback from external ignition sources



Horizontally-Stored Drums



Vertically-Stored Drums



| Safety Drum Vents | Vacuum Relief | NPT/NPS | Approv/Lstg Regulation | Model | CA Prop 65 |
|--|---------------|----------------|------------------------|-------|------------|
| Brass vertical vent for petroleum-based applications | Auto | 2 in (DN50) | FM | 08101 | ⚠ |
| Brass vertical vent assembly for 0.75 in (DN20) bung | | 0.75 in (DN20) | | 08102 | ⚠ |
| Nonmetallic vertical vent, plated steel flame arrester, for petroleum based applications | | 2 in (DN50) | | 08005 | |
| Nonmetallic vertical vent, stainless steel flame arrester for chlorinated solvents | | | | 08006 | |
| Brass horizontal vent for petroleum-based applications | Manual | 2 in (DN50) | FM | 08300 | ⚠ |
| Stainless steel horizontal vent for corrosives and general solvents | | | | 08306 | ⚠ |
| Cast-iron EL fitting for mounting vent nos. 08101 or 08006 in 2 in (DN50) bung opening | — | — | — | 08011 | |
| Cast-iron EL fitting for mounting vent nos. 08101 or 08006 in 0.75 in (DN20) bung opening | — | — | — | 08015 | |
| Aerosolv® brass drum vent for 2 in (DN50) bung with filter and one extra replacement filter | Auto | 2 in (DN50) | FM | 28206 | ⚠ |
| Aerosolv® brass drum vent for 0.75 in (DN20) bung with filter and one extra replacement filter | | 0.75 in (DN20) | | 28207 | ⚠ |
| Replacement filter (2-pack) for Aerosolv® drum vent | — | — | — | 28198 | |


| Safety Fill Vents and Funnels | Vacuum Relief | NPT/NPS | Approv/Lstg Regulation | Model | CA Prop 65 |
|---|---------------|-------------|------------------------|-------|------------|
| Fill vent with 9 in (229 mm) in polyethylene funnel, 6 in (152 mm) flame arrester | Auto | 2 in (DN50) | FM | 08211 | ⚠ |
| Fill vent with 6 in (152 mm) flame arrester | | | | 08204 | ⚠ |
| Polyethylene funnel only (no flame arrester) | — | — | — | 08213 | ⚠ |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Safety Drum Faucets

Leakproof dispensing of flammable liquids—internal flame arrester prevents flashback into the drum for added safety

- Brass construction with a polytetrafluoroethylene (PTFE) seal ensures excellent chemical resistance
- Models 08910 and 08916 feature a coupling nut that provides rotation of the spout downward after the faucet is threaded in place
- Use model 08552 for viscous noncorrosive flammables such as adhesives, paint or heavy oils above 2000 SSU (about 30W oil)
- FM-approved

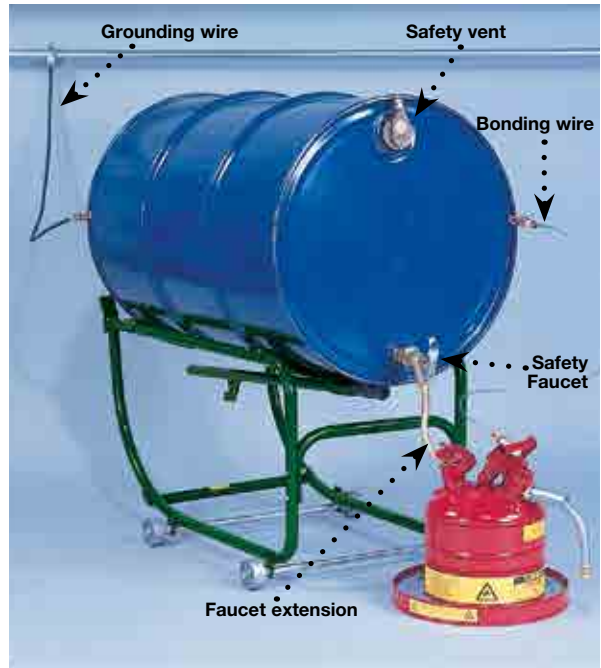

Create a safe dispensing station using Justrite® safety products.




| Description | NPT/NPS | Internal Spout Thread | Approv/Lstg Regulation | Model | CA Prop 65 |
|--|----------------|-----------------------|------------------------|-------|------------|
| Brass drum gate valve, viscous liquids | 2 in (DN50) | — | FM | 08552 | ⚠ |
| Brass safety faucet, rigid | 0.75 in (DN20) | 0.8125 in - 27 UNS 2B | | 08902 | ⚠ |
| Brass safety faucet, adjustable | | | | 08910 | ⚠ |
| Brass safety faucet, viscous liquids | | | | 08955 | ⚠ |
| Brass control flow lab safety faucet | | 0.5 in - 20 UNF | | 08540 | ⚠ |
| Stainless steel faucet, adjustable | | 0.8125 in - 27 UNS 2B | | 08916 | |
| Flexible faucet extension 3.25 in (83 mm) long, brass for use with 08902, 08910, and 08955 | | | — | 08932 | ⚠ |
| Flexible faucet extension 6 in (152 mm) long, stainless steel for use with 08916 | | | | 08587 | ⚠ |
| Flexible faucet extension 6 in (152 mm) long, brass for use with 08540 or 08955 | | | | 08584 | ⚠ |
| Flexible faucet extension 8 in (203 mm) long, brass for use with 08902, 08910, and 08955 | | | | 08930 | ⚠ |

Drum Siphon Adaptor

Safely drain a horizontally-stored drum down to a few ounces to save on costs associated with removal of hazardous liquids

- Solid cast brass adaptor withstands heavy use with compatible liquids
- Adaptor fits into a 0.75-in (19-mm) drum bung and features an adjustable collar to accommodate bungs in various positions for maximum draining
- Use a 0.75-in (19-mm) safety drum faucet for safe, trouble-free dispensing

| Description | Model | CA Prop 65 |
|---|-------|------------|
| Brass drum siphon adaptor for 0.75 in NPT/NPS (DN20) bung | 08311 | ⚠ |
| Brass adaptor 08311 and brass self-closing faucet 08902 | 08308 | ⚠ |

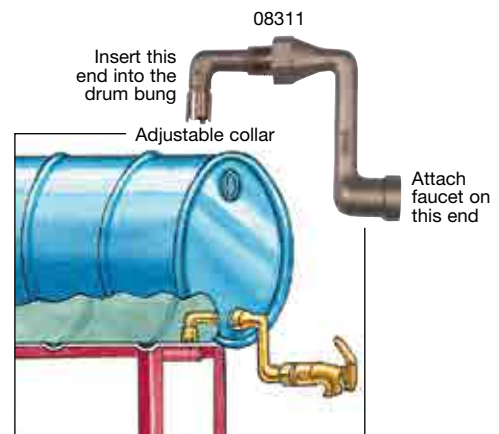

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Antistatic Wires

Prevent sparks from static electricity generated by movement and flow of flammable liquids

- During waste collection operations, use one antistatic wire to bond from a safety container to a receiving vessel such as a funnel, then properly ground by attaching a second antistatic wire to the drum and then to an earth ground
- Standard wire lengths are 3-foot (1-m) and 10-foot (3-m); for longer reach, use several wires with 0.25-in (6-mm) terminal ends
- Custom length assemblies available in 3-foot (1-m) increments



Bond dispensing can to receiving container, then ground receiving container to a water pipe or ground strip.



| Description | End Connections | Model |
|---|--|-------|
| Flexible wire, 10 foot (3 meters) coiled | Hand clamp + 0.25 in (6 mm) terminal | 08496 |
| Insulated wire, 10 foot (3 meters) coiled | Hand clamp + 0.25 in (6 mm) terminal | 08497 |
| | "C" clamp 0.625 in (16 mm) + hand clamp | 08498 |
| | Dual hand clamps | 08499 |
| | Dual alligator clips 0.625 in (16 mm) jaws | 08500 |
| Flexible wire, 3 foot (1 meter) | "C" clamp 0.625 in (16 mm) + alligator clip 0.625 in (16 mm) | 08501 |
| | Dual 0.25 in (6 mm) terminals. Also used as an extension | 08503 |
| | "C" clamp 0.625 in (16 mm) + alligator clip 0.625 in (16 mm) | 08505 |
| | Dual 0.25 in (6 mm) terminals. Also used as an extension | 08506 |
| For custom assemblies, call Customer Service. | | |



Drum Fill Gauges

Avoid overfilling and dangerous overflow – polyethylene pop-up gauge provides an economical way to prevent accidents

- Polyethylene gauges for use with vertically-stored drums during waste disposal operations
- Zinc-plated, cast-iron gauge for horizontally-stored drums permits visual checking of liquid level. Heavy-duty glass tubing protected by a chrome-plated housing for use with non-viscous liquids. Buna-N seals are suitable for petroleum products.



08532





08530

| Description | Dimensions | NPT/NPS | Model |
|---|------------------------------------|----------------|--------|
| Vertical drum polyethylene pop-up gauge | 0.75 in dia. - 5 in L (127 mm) | 0.75 in (DN20) | 08530 |
| Vertical drum polyethylene pop-up gauge | 0.75 in dia. - 11 in L (279 mm) | | 08531 |
| Horizontal drum cast-iron fill gauge | 0.75 in dia. - 11.25 in L (286 mm) | | 08532* |
| Horizontal drum cast-iron fill gauge 08532 with self-closing faucet No. 08902 | | | 08533 |

* Can be used with drum siphon adapter 08311 or 08308 (see page 90).

Drum Accessories

Add convenience and safety when handling and dispensing from drums

- **Drum Bung Wrench** - rugged, non-sparking brass. Opens 2-in (51-mm) and .075-in (19-mm) bung caps.  08805
- **Drum Locks** - secures contents. Corrosion resistant, non-sparking zinc die-cast. Installs over bung flange—no potential for content contamination.
- **Drum Lifter** - tong-style lifter with 1,000-lbs (454-kgs) capacity grips the drum chime to allow a 55-gallon (200-L) drum to be elevated and moved with a forklift truck. For use with steel drums, not poly.  08801

| Description | W x D | Model | CA Prop 65 |
|--|---------------------------------|-------|------------|
| Drum bung wrench fits 2 in & 0.75 in NPT (DN50 & DN20) bungs | | 08805 | ⚠ |
| Steel drum lock set fits 2 in & 0.75 in NPT (DN50 & DN20) bung (set of 2 padlocks) | | 08510 | |
| Steel drum lock set fits 2 in & 0.75 in NPT (DN50 & DN20) bung (padlocks not included) | | 08508 | |
| Plastic drum lock set fits 2 in NPT (DN50) bung (set of 2 padlocks) | | 08511 | |
| Plastic drum lock set fits 2 in NPT (DN50) bung (padlocks not included) | | 08509 | |
| Drum lifter | Jaws open 18-25 in (457-635 mm) | 08801 | |




Heavy-duty drum wrench opens tight drum bungs with ease.

Handling and Transport Accessories

- **Drum Cradle** - Safely moves steel drums weighing up to 600-lbs (272-kgs). Loading bar grips drum chime and permits smooth shifting of drum into horizontal position.
- **Drum Dolly** - Move vertically stored drums with this steel dolly. Generously sized platform accommodates 55-gallon (200-L) drums and Justrite's single-drum collection station.

| Description | W x D | OD x H | Model |
|-------------|---|-----------------------------|-------|
| Drum Cradle | Frame size: 22.5 x 35.5 in (571 x 902 mm) Handle: 35.75 (908 mm) | — | 08800 |
| Drum Dolly | — | 27 x 5.25 in (686 x 133 mm) | 28270 |



Spill-Control Accessories

- **Spill Tray** - Made of 24-gauge coated steel, tray features a low-profile for easy placement beneath vertically-stored drums. Also for use with safety cans 5-gallon (19-L) and smaller.
- **Drip Can** - Durable, 24-gauge coated steel drip can with perforated metal fire baffle acts as a flame arrester to protect contents from fire exposure. Can catches up to 1-gallon (4-L) of flammable liquids. Top removes for quick cleaning.

| Description | OD x H | Spill Capacity | Approv/Lstg Regulation | Model |
|-------------|-------------------------------|----------------|------------------------|-------|
| Drip can | 9.375 x 4.5 in (238 x 114 mm) | 1 gal (4 L) | FM | 10376 |
| Spill tray | 13.75 x 1.25 in (349 x 32 mm) | 1 qt (1 L) | | 10177 |



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Spill Control & Environmental

Down-to-earth



Why do I need spill containment?

Hazardous leaks and spills are a relentless challenge. Slippery floors indoors can lead to a fall accident with associated costs anywhere from \$5,000 to \$40,000 for more severe lost-time accidents. In addition to the damaging effects to our environment, EPA fines for contamination of our outdoors can be staggering, into the tens and hundreds of thousands of dollars. By using Justrite spill control products, accidents and costly fines can be easily avoided.

Good spill containment practices offer these benefits:

- Keeps personnel and the environment protected
- Supports corporate and government sustainability initiatives
- Saves money by reclaiming spilled liquids
- Enhances your safety program, raises employee awareness
- Improves your company image—shows your commitment to employees and the environment
- Increases efficiencies by keeping materials organized
- Complies to laws and avoids fines—meets or supports EPA and SPCC (Spill Prevention, Control, and Countermeasure) regulations

Flexible containment

Flexible containment products are typically made of durable PVC coated fabric which folds down and stores compactly for easy portability and emergency use. They can be used indoors or out and capture anything from small leaks and drips to large-scale spills up to 5,860 gallons (22,187 liters). Patented Rigid-Lock QuickBerms® feature vehicle drive-in, drive-out capability, and offer fast, one-piece set up.

Structured containment

Structured containment products are typically used indoors to safely store drums of hazardous liquids. For outdoor use, weather-resistant sheds equipped with leakproof sumps safely store drums or IBC's. Most are constructed of rigid, durable EcoPolyBlend™ recycled content, making them twice as good for the environment. Sump capacities as high as 372 gallons (1,408 liters) prevent groundwater contamination—and recycled content saves on oil, electricity, and landfill space.



Rigid-Lock QuickBerm® offers immediate, secure deployment and no-worry, spill-readiness.



Quick-deploy design for permanent or temporary spill control



No assembly needed—saves time, ready in minutes!



A simple tug locks supports in upright position.

Rigid-Lock technology

Patented wall-support design maximizes inside berm space and reduces tripping hazards on the berm perimeter. They lock the sidewalls in



a 12-in (305-mm) high, 90° vertical position for strong structural integrity. Sidewalls lower quickly for easy drive-in and -out. Encased in protective nylon hub and in down position, support withstands vehicle traffic with 11,000-lbs (5,009-kgs) of tire weight at each tire. Hub includes integrated holes to accept anchors (anchors not included).


CriticalCorner™

Reinforced CriticalCorner™ design featuring wraparound diagonal radio frequency welds using electromagnetic energy and pressure creates a permanent, impenetrable bond for 100% leakproof containment. Prevents billowing, unwrapping, or sagging of the corners during full containment for fluid-tight reliability. Walls include a 1-in (25-mm) fray-resistant finished hem along the top rim for added wall strength and integrity. Seam seals prevent air, gas, vapors or fluids from either entering or escaping the berm.



Chemical Resistance

EnGuard™ modified PVC coated fabric withstands a broad range of chemicals including petroleum, oils, grease, and most acids—



durable enough for extended wear. Exceptionally strong structural integrity. Withstands long-term UV exposure—great for outdoor use. Visit justrite.com for chemical compatibility charts to ensure performance and longevity.



Large-scale spill protection with optimum floor space for unobstructed drive-through capability.

Rigid-Lock QuickBerm® Plus

Heavy-duty drive-in long-term spill containment for vehicles, heavy equipment, and tankers—supports SPCC

- EnGuard™ VI modified PVC coated fabric is thicker and more robust for frequent vehicle traffic and heavy applications
- Highly chemical resistant and withstands long-term UV exposure—great for outdoor use
- Patented Rigid-Lock stainless-steel wall-support system locks at 90° for secure, leakproof containment
- Quick and easy setup—simply push on locks to lay wall down flat for an unobstructed work space and drive-through capability
- Single-piece construction with reinforced CriticalCorner™ design and radio frequency (RF) welds prevent seam leaks, provide fluid-tight reliability
- Integrated holes permit easy anchoring under high wind conditions. Anchor stakes not included.



28504

| Capacity Gal/L | W x L x H | | Model |
|----------------|---|--|-------|
| | Interior | Folded | |
| 595/2252 | 8 ft x 10 ft x 12 in (2.4 m x 3.0 m x 305 mm) | 24 x 24 x 12 in (610x 610 x 305 mm) | 28500 |
| 1120/4240 | 10 ft x 15 ft x 12 in (3.0 m x 4.6 m x 305 mm) | 24 x 24 x 16 in (610 x 610 x 406 mm) | 28502 |
| 2510/9501 | 12 ft x 28 ft x 12 in (3.7 m x 8.5 m x 305 mm) | 32 x 32 x 16 in (813 x 813 x 406 mm) | 28504 |
| 4485/16978 | 12 ft x 50 ft x 12 in (3.7 m x 15.2 m x 305 mm) | 36 x 36 x 20 in (914 x 914 x 508 mm) | 28506 |
| 4840/18321 | 12 ft x 54 ft x 12 in (3.7 m x 16.5 m x 305 mm) | 36 x 36 x 24 in (914 x 914 x 610 mm) | 28508 |
| 5860/22183 | 14 ft x 56 ft x 12 in (4.3 m x 17.1 m x 305 mm) | 40 x 40 x 24 in (1016 x 1016 x 610 mm) | 28510 |

Note (1): For exterior dimension, add 8-in (203-mm) to width and length to account for support and hub.

Note (2): When selecting a berm size, allow 12-in (305-mm) at entry or exit for lowering and raising the wall.

Rigid-Lock QuickBerm®

- Durable EnGuard™ V modified PVC coated fabric is suited for placing heavy materials within the working space, occasional drive-in or –out scenarios and pedestrian traffic
- Chemical resistant and withstands long-term UV exposure—great for outdoor use
- Patented Rigid-Lock integral stainless-steel wall-support system locks at 90° for secure, leakproof containment
- Single-piece construction—patented Rigid-Lock wall-support system integral to berm provides unobstructed work space
- Quick and easy setup—no assembly required
- Integrated holes permit easy anchoring under high wind conditions. Anchor stakes not included.
- Supports SPCC for containment and spill prevention



Portable, drive-in containment berms can be used indoors or out, for storage of drums, tanks, or leaky equipment.



| Capacity Gal/L | W x L x H | | Model |
|----------------|--|--------------------------------------|-------|
| | Interior | Folded | |
| 175/662 | 4 ft x 6 ft x 12 in (1.2 m x 1.8 m x 305 mm) | 24 x 24 x 5 in (610 x 610 x 127 mm) | 28512 |
| 235/890 | 4 ft x 8 ft x 12 in (1.2 m x 2.4 m x 305 mm) | 24 x 24 x 6 in (610 x 610 x 152 mm) | 28514 |
| 355/1344 | 6 ft x 8 ft x 12 in (1.8 m x 2.4 m x 305 mm) | 24 x 24 x 12 in (610 x 610 x 305 mm) | 28516 |
| 475/1798 | 8 ft x 8 ft x 12 in (2.4 m x 2.4 m x 305 mm) | 26 x 26 x 12 in (660 x 660 x 305 mm) | 28518 |
| 745/2820 | 10 ft x 10 ft x 12 in (3.0 m x 3.0 m x 305 mm) | 28 x 28 x 12 in (711 x 711 x 305 mm) | 28519 |
| 1075/4069 | 12 ft x 12 ft x 12 in (3.7 m x 3.7 m x 305 mm) | 28 x 28 x 12 in (711 x 711 x 305 mm) | 28522 |
| 1435/5432 | 12 ft x 16 ft x 12 in (3.7 m x 4.9 m x 305 mm) | 26 x 26 x 16 in (660 x 660 x 406 mm) | 28524 |
| 1795/6795 | 12 ft x 20 ft x 12 in (3.7 m x 6.1 m x 305 mm) | 30 x 30 x 16 in (762 x 762 x 406 mm) | 28526 |
| 1910/7230 | 16 ft x 16 ft x 12 in (4.9 m x 4.9 m x 305 mm) | 36 x 36 x 16 in (914 x 914 x 406 mm) | 28528 |
| 2390/9047 | 16 ft x 20 ft x 12 in (4.9 m x 6.1 m x 305 mm) | 36 x 36 x 20 in (914 x 914 x 508 mm) | 28530 |
| 2990/11318 | 20 ft x 20 ft x 12 in (6.1 m x 6.1 m x 305 mm) | 38 x 38 x 22 in (965 x 965 x 559 mm) | 28532 |

Note (1): For exterior dimension, add 8-in (203-mm) to width and length to account for support and hub.

Note (2): When selecting a berm size, allow 12-in (305-mm) at entry or exit for lowering and raising the wall.



Quickly capture spills from damaged saddle tanks, minimizing ground contamination and associated clean-up costs.

Rigid-Lock QuickBerm® Lite

Lightweight, portable, versatile containment berm deploys quickly for emergency spill response

- Tough EnGuard™ I PVC coated fabric provides broad UV and chemical resistance that withstands repeated usage
- Patented wall supports maximize usable space inside the berm and reduce tripping hazard around the perimeter. Stainless steel braces support wall at 90° locked position for secure, leakproof containment.
- Folds to a small size for storage in trucks, emergency vehicles, and spill kits
- Optional grates help reduce contact with contaminated liquids (see page 103)
- Supports SPCC



Use as an emergency decontamination station with optional grating.



28372

| Capacity Gal/L | W x L x H | | Model |
|----------------|--|--------------------------------------|-------|
| | Interior | Folded | |
| 79/299 | 4 ft x 4 ft x 8 in (1.2 m x 1.2 m x 203 mm) | 16 x 12 x 5 in (406 x 305 x 127 mm) | 28370 |
| 119/451 | 4 ft x 6 ft x 8 in (1.2 m x 1.8 m x 203 mm) | 16 x 14 x 6 in (406 x 356 x 152 mm) | 28372 |
| 159/602 | 4 ft x 8 ft x 8 in (1.2 m x 2.4 m x 203 mm) | 16 x 14 x 6 in (406 x 356 x 152 mm) | 28374 |
| 318/1204 | 8 ft x 8 ft x 8 in (2.4 m x 2.4 m x 203 mm) | 16 x 14 x 12 in (406 x 356 x 305 mm) | 28376 |
| 398/1507 | 8 ft x 10 ft x 8 in (2.4 m x 3.0 m x 203 mm) | 16 x 14 x 14 in (406 x 356 x 356 mm) | 28378 |

Note (1): For exterior dimension, add 8-in (203-mm) to width and length to account for support and hub.
 Note (2): When selecting a berm size, allow 8-in (203-mm) at entry or exit for lowering and raising the wall.

Decon QuickBerm®

Portable multi-zone decon stations help prevent environmental contamination

- For emergency deployment, multi-stage berms with patented interior walls create wash down zones that safely capture and contain contaminated solutions. Select from two-, three-, or four-zone models.
- Lightweight PVC coated fabric provides wide range of chemical resistance. The 8-in (203-mm) walls allow for easy entry and exit of the compartments. One 0.75-in GHT drain fitting per zone.
- Single-piece construction—patented inside wall-support system forms watertight wash down zones
- Quick and easy setup—no assembly required
- Optional durable, anti-slip grates keep personnel and parts away from fluids and contaminants above contaminated wash down water (see page 103)



Individual, leakproof zones prevent contaminated fluid from traveling from one zone to another.

| Capacity Gal/L | Zones | W x L x H | | Model |
|----------------|-------|--|-------------------------------------|-------|
| | | Interior | Folded | |
| 299/1132 | 2 | 6 ft x 10 ft x 8 in (1.8 m x 3.0 m x 203 mm) | 24 x 24 x 4 in (610 x 610 x 102 mm) | 28570 |
| 478/1810 | 3 | 6 ft x 16 ft x 8 in (1.8 m x 4.9 m x 203 mm) | 26 x 26 x 5 in (660 x 660 x 127 mm) | 28572 |
| 598/2264 | 4 | 6 ft x 20 ft x 8 in (1.8 m x 6.1 m x 203 mm) | 28 x 28 x 4 in (711 x 711 x 102 mm) | 28574 |

Washdown QuickBerm®

Portable drive-through station captures contaminated water from vehicle and construction equipment wash down

- Durable vinyl coated material reinforced with radio frequency-welded, high visibility yellow runway strips that withstand drive-thru traffic, including backhoes and skid steers
- Removable 4-in (102-mm) diameter foam inserts support sidewalls while 2-in H x 8-in W (51- x 203-mm) planks (not included) slide into pockets to keep end walls elevated preventing wastewater from escaping during drive-over
- Brass grommets around perimeter provide the ability to securely anchor berm during use. Anchor stakes not included.
- Helps comply with EPA for storm water regulations



Wash down dirty equipment and recapture water for reclamation.



Drain fitting offers an easy way to redirect liquids.



Drive over endwalls without losing liquids.

| Capacity Gal/L | W x L x H | | Model |
|----------------|---|--|-------|
| | Interior | Folded | |
| 250/947 | 10 ft x 11 ft x 4 in 3.0 m x 3.4 m x 102 mm | 40 x 40 x 20 in 1016 x 1016 x 508 mm | 28576 |
| 425/1609 | 10 ft x 18 ft x 4 in 3.0 m x 5.5 m x 102 mm | 40 x 40 x 24 in 101 x 1016 x 610 mm | 28578 |
| 750/2840 | 12 ft x 26 ft x 4 in 3.7 m x 7.9 m x 102 mm | 40 x 40 x 36 in 1016 x 1016 x 914 mm | 28579 |
| 1800/6815 | 14 ft x 54 ft x 4 in 4.3 m x 16.5 m x 102 mm | 40 x 40 x 48 in 1016 x 1016 x 1219 mm | 28581 |

Note: For exterior dimension, add 8-in (203-mm) to width and 36-in (914-mm) length.

QuickBerm® Ground Protection Accessories

Improve berm longevity without sacrificing functionality

Ground Mats: Create a smooth, uniform deployment area with this heavy-duty woven fabric. Place under berm for improved wear resistance against rocks and construction debris.

Track Mats: Position inside the berm for extra protection along tire paths. Thick durable, black woven fabric protects the floor and walls from tire abrasion caused by skidding, turning, and braking.

Track Runners: Place this high visibility, yellow vinyl coated fabric inside the berm for moderate protection against tire abrasion.



Improve wear resistance and extend the life of your berm by adding track runners.



28356 Ground Mat



28348 Track Mat



28340 Track Runner

| Description | 6-ft (1.8-m) Length Model | 10-ft (3.0-m) Length Model | 16-ft (4.9-m) Length Model | 28-ft (8.5-m) Length Model | 56-ft (17.1-m) Length Model |
|--------------------------------|------------------------------|-------------------------------|-------------------------------|-------------------------------|--------------------------------|
| 6-ft (1.8-m) wide ground mat | 28338 | 28344 | 28350 | 28356 | 28362 |
| 3-ft (0.9-m) wide track mat | 28336 | 28342 | 28348 | 28354 | 28360 |
| 3-ft (0.9-m) wide track runner | 28334 | 28340 | 28346 | 28352 | 28358 |

Berm Repair Kits

Repair lightly damaged berms

Use to repair berms having small holes, abrasion points, and small tears to maintain fluid-tight reliability and compliance.

- Heat gun and nozzle
- Scissors and utility knife
- Pressure application roller
- PVC cement
- Sand paper
- 10-square feet of coated fabric repair material



| Description | Use to repair these products | Model | CA Prop 65 |
|------------------------------|---|-------|------------|
| Modified vinyl repair kit | Rigid-Lock QuickBerm® Plus, Rigid-Lock QuickBerm®, and the Mini-Berm Flex Tray | 28328 | ⚠ |
| PVC coated fabric repair kit | Rigid-Lock QuickBerm® Lite, Decon QuickBerm®, Maintenance Spill Berm, and Pop-Up Pool | 28330 | ⚠ |

⚠ WARNING: This product can expose you to chemicals including toluene, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



Space-saving design for emergency spill control from ruptured saddle tanks.


Pop-Up Pools

Simply unfold, shake from foam ring top, and place under leaking equipment

- Contain spills from punctured saddle tanks, or leaking drums, hydraulic lines, pipes, and machinery
- Durable vinyl fabric is 20% heavier than other models on the market, providing increased abrasion resistance and more reliable seam adhesions
- Embedded foam ring top raises containment wall as fluid level increases
- Yellow color provides visibility and easy identification



Use for temporary spill containment for leaky drums.

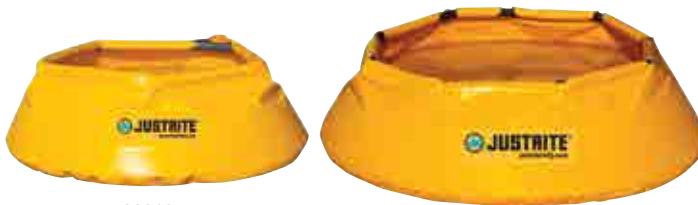

28319

28321



Folds to a compact size for storage in tight spaces.

| Capacity Gal/L | Product Diameter x H | Folded W x L x H | Model |
|----------------|-------------------------------|-------------------------------------|-------|
| 20/76 | 31 x 11.75 in (787 x 298 mm) | 18 x 12 x 3 in (457 x 305 x 76 mm) | 28319 |
| 66/250 | 46 x 14 in (1168 x 355 mm) | 18 x 16 x 6 in (457 x 406 x 152 mm) | 28321 |
| 100/379 | 50 x 18.75 in (1270 x 476 mm) | 24 x 24 x 3 in (610 x 610 x 76 mm) | 28323 |
| 150/568 | 62 x 16 in (1574 x 406 mm) | 24 x 24 x 5 in (610 x 610 x 127 mm) | 28325 |

Maintenance Spill Berms

Compact and flexible spill containment deploys instantly in the shop or field

- Quickly contain minor spills and leaks during temporary storage of drums, machine parts, batteries, and equipment
- Lightweight PVC coated fabric provides broad UV and chemical resistance
- Encased urethane foam sidewalls offer easy roll-through access without the need for a ramp
- Walls quickly spring back into place with no memory loss
- No assembly required—simply unfold and use
- Anchor berm in place using the brass grommets in each corner. Anchor stakes not included.
- Order optional grates to keep products and machinery above fluid (see page 103)



Portable, flexible spill berm provides leak and spill protection anywhere in your facility.



28400 and 1642S

28416 and 16421B



Roll-over sidewalls offer easy drum placement.



Folds up for easy storage.

| Capacity Gal/L | Interior W x L | Folded W x L x H | Sidewall Height | Model |
|----------------|--------------------------|--------------------------------------|-----------------|-------|
| 5/19 | 2 x 2 ft (0.6 x 0.6 m) | 30 x 30 x 2 in (762 x 762 x 51 mm) | 2 in (51 mm) | 28414 |
| 10/38 | | 30 x 30 x 4 in (762 x 762 x 102 mm) | 4 in (102 mm) | 28400 |
| 10/38 | 2 x 4 ft (0.6 x 1.2 m) | 30 x 54 x 2 in (762 x 1372 x 51 mm) | 2 in (51 mm) | 28416 |
| 20/76 | | 16 x 30 x 16 in (406 x 762 x 406 mm) | 4 in (102 mm) | 28402 |
| 40/151 | 2 x 8 ft (0.6 x 2.4 m) | 28 x 28 x 16 in (711 x 711 x 406 mm) | 4 in (102 mm) | 28404 |
| 20/76 | 4 x 4 ft (1.2 x 1.2 m) | 30 x 30 x 6 in (762 x 762 x 152 mm) | 2 in (51 mm) | 28418 |
| 40/151 | | 20 x 24 x 16 in (508 x 610 x 406 mm) | 4 in (102 mm) | 28406 |
| 60/227 | 4 x 6 ft (1.2 x 1.8 m) | 24 x 24 x 16 in (610 x 610 x 406 mm) | 4 in (102 mm) | 28408 |
| 40/151 | 4 x 8 ft (1.2 x 2.4 m) | 30 x 30 x 12 in (762 x 762 x 305 mm) | 2 in (51 mm) | 28421 |
| 80/303 | | 36 x 36 x 16 in (914 x 914 x 406 mm) | 4 in (102 mm) | 28410 |
| 44/167 | 6 x 6 ft (1.8 x 1.8 m) | 24 x 24 x 16 in (610 x 610 x 406 mm) | 2 in (51 mm) | 28422 |
| 90/341 | | 38 x 38 x 16 in (965 x 965 x 406 mm) | 4 in (102 mm) | 28412 |
| 135/511 | 10 x 11 ft (3.0 x 3.4 m) | 28 x 28 x 16 in (711 x 711 x 406 mm) | 2 in (51 mm) | 28424 |
| 220/833 | 10 x 18 ft (3.0 x 5.5 m) | 30 x 30 x 16 in (762 x 762 x 406 mm) | | 28426 |

Note: For exterior dimension on 4-in (102-mm) models, add 12-in (305-mm) to width and length. For exterior dimension on 2-in (51-mm) models, add 6-in (152-mm) to width and length.



28416

28414

Ceiling Leak Diverters

Redirect roof or pipe leaks to prevent water damage to protect your personnel, equipment, and inventory

- Durable, puncture resistant, and watertight PVC-coated yellow fabric channels overhead leaks to containers or floor drains
- Connect to a standard garden hose to drain water safely away. Flow rate of 3.3 gal/min (12.5 L/min)
- Available with high strength magnets for steel rafter attachment, or grommets for bungee or zip tie attachment
- Constructed with cinched corners for quick and easy installation



| Product W x L | Folded W x L x H | Model Grommets | Model Magnets |
|--------------------------|--------------------------------------|----------------|---------------|
| 5 x 5 ft (1.5 x 1.5 m) | 18 x 12 x 2 in (457 x 305 x 51 mm) | 28300 | 28302 |
| 7 x 7 ft (2.1 x 2.1 m) | 18 x 16 x 4 in (457 x 406 x 102 mm) | 28304 | 28306 |
| 10 x 10 ft (3.0 x 3.0 m) | 18 x 16 x 6 in (457 x 406 x 152 mm) | 28308 | 28310 |
| 12 x 12 ft (3.7 x 3.7 m) | | 28312 | 28314 |
| 15 x 15 ft (4.6 x 4.6 m) | 18 x 16 x 10 in (457 x 406 x 254 mm) | 28315 | — |
| 20 x 20 ft (6.1 x 6.1 m) | 18 x 16 x 14 in (457 x 406 x 356 mm) | 28318 | — |

Mini-Berm Flex Tray

Compact, portable spill control for harsh and hazardous chemicals

- Safe and reliable for tabletop parts cleaning and fluid transfer operations involving petroleum products and acids
- Made from a robust modified PVC-coated fabric
- Rigid corner supports and sturdy foam walls. Each berm comes with a 1-in NPT drain fitting.
- Easy to fold and store; utility strap included
- Helps comply with EPA for containment and spill prevention (SPCC)



| Capacity Gal/L | W x L x H | | Model |
|----------------|---|-------------------------------------|-------|
| | Interior | Folded | |
| 30/114 | 3 ft x 3 ft x 6 in (0.9 m x 0.9 m x 152 mm) | 5 x 50 x 7 in (127 x 1270 x 178 mm) | 28442 |
| 55/208 | 4 ft x 4 ft x 6 in (1.2 m x 1.2 m x 152 mm) | 5 x 62 x 7 in (127 x 1575 x 178 mm) | 28444 |
| 70/265 | 4 ft x 5 ft x 6 in (1.2 m x 1.5 m x 152 mm) | 8 x 60 x 8 in (203 x 1524 x 203 mm) | 28446 |
| 110/416 | 5 ft x 6 ft x 6 in (1.5 m x 1.8 m x 152 mm) | 8 x 62 x 8 in (203 x 1575 x 203 mm) | 28448 |

Grates

Keep parts and equipment away from fluids and contaminants

Durable grates help keep drums and other objects above spills. Made of chemical resistant, easy-to-clean polyethylene.



1642S

| Description | W x L x H | Model |
|----------------------|--|-------|
| Polyethylene grating | 25.25 x 25.25 x 1.5 in (642 x 642 x 38 mm) | 1642S |
| | 25.25 x 50.5 x 1.5 in (642 x 1283 x 38 mm) | 1642B |

Water-Filled Boom Diverters

Divert and control fluid for easy cleanup or recovery—helps comply with EPA for storm water regulations

- Use water filled booms in storm water management, portable washdown/pressure washing diversion, and spill diversion
- Flexible PVC film construction conforms to uneven surfaces such as asphalt or concrete to form a diversionary barrier away from storm drains or as a holding area for wet vacuum operations
- Features easy-open push plug for filling with standard water hose



Redirect liquids away from work areas and storm drains.

| Product W x L | Folded W x L x H | Model |
|--------------------------------|-------------------------------------|-------|
| 9 in x 5 ft (229 mm x 1.5 m) | 6 x 12 x 3 in (152 x 305 x 76 mm) | 28450 |
| 9 in x 10 ft (229 mm x 3.0 m) | 6 x 14 x 4 in (152 x 356 x 102 mm) | 28452 |
| 9 in x 25 ft (229 mm x 7.6 m) | 10 x 18 x 6 in (254 x 457 x 152 mm) | 28454 |
| 9 in x 50 ft (229 mm x 15.2 m) | 10 x 18 x 6 in (254 x 457 x 152 mm) | 28456 |

Water-Filled Drain Covers

Ensure regulatory compliance and prevent run-off pollutants from entering stormwater drains

- Deploy cover as a preventative measure to seal drains before washdowns, maintenance, or other cleanup tasks
- Long-lasting durable modified vinyl construction resists damage caused by UV rays
- Features easy-open push plug for filling with standard water hose
- Order a cover size that overlaps drain opening at least 6-in (152-mm) on each edge. To prevent edges from losing contact with ground surface, do not fill over 5-in (127-mm) in height.



28468

| Product W x L | Folded W x L x H | Model |
|-----------------------------|-------------------------------------|-------|
| 30 x 30 in (762 x 762 mm) | 15 x 15 x 3 in (381 x 381 x 76 mm) | 28468 |
| 42 x 42 in (1067 x 1067 mm) | 16 x 18 x 4 in (406 x 457 x 102 mm) | 28470 |
| 42 x 66 in (1067 x 1676 mm) | 16 x 18 x 6 in (406 x 457 x 152 mm) | 28472 |
| 58 x 58 in (1473 x 1473 mm) | 29 x 29 x 5 in (737 x 737 x 127 mm) | 28474 |

Waterproof Tarps

Protect drums and equipment to avoid contamination or damage

- Shield equipment from the harsh effects of direct sunlight, sand, dust, and rain with these protective covers
- Waterproof, lightweight vinyl coated fabric reduces the effect of the environment
- Brass grommets in corners offer a convenient way to secure the tarp in place

| Product W x L | Folded W x L x H | Model |
|--------------------------|-------------------------------------|-------|
| 5 x 5 ft (1.5 x 1.5 m) | 18 x 16 x 6 in (457 x 406 x 152 mm) | 28432 |
| 5 x 10 ft (1.5 x 3.0 m) | | 28434 |
| 10 x 10 ft (3.0 x 3.0 m) | | 28436 |
| 10 x 12 ft (3.0 x 3.7 m) | | 28438 |
| 10 x 20 ft (3.0 x 6.1 m) | | 28439 |



28432

Keep drums clean from dirt and debris.

Drip Pads

Capture small oil leaks and drips before they contaminate the ground or create unsafe work surfaces

- Made from UV- and chemical-resistant modified PVC
- Patented design includes coated mesh to trap coarse debris
- Replaceable oil-only absorbent within a welded leakproof barrier
- Rated for drive over applications, pads include brass grommets in opposing corners for anchoring. Anchoring stakes not included.
- Pads come in two sizes; extended model is weighted to keep it down in high winds. Outer shell is reusable with optional refill sorbent packs.



28458





Position drip pad in tight spaces between machinery to capture oily leaks.

| Description | Capacity Gal/L | Product W x L | Folded W x L x H | Model |
|--|----------------|----------------------------|-------------------------------------|-------|
| Drip pad with 5-pack sorbents | 1.25/5 | 21x 23 in (533 x 584 mm) | — | 28458 |
| Extended drip pad with 5-pack sorbents | 1.75/7 | 24 x 36 in (610 x 914 mm) | 24 x 12 x 6 in (610 x 305 x 152 mm) | 28459 |
| Drip pad 5-pack Refill | 1.25/5 | 15 x 19 in (381 x 483 mm) | — | 28460 |
| Extended drip pad 5-pack refill | 1.75/7 | 30 x 52 in (762 x 1321 mm) | — | 28461 |

Eagle Steel Spill Containment Pallets

Rugged and durable pallets for industrial drum storage applications, including flammable liquids

- Constructed of 12-gauge (2-mm) cold rolled steel with a corrosion resistant blue powder coat finish
- Corrugated galvanized steel grating with 0.50-in (13-mm) drain holes is removable for easy cleaning
- Large forklift pockets in front and back make relocation easy
- EPA compliant, supports SPCC and meets NFPA 1 and IFC fire codes



| Description | Sump Capacity Gal/L | Load-bearing* Capacity lb/kg | External W x D x H | Compliance | Model |
|---------------|---------------------|------------------------------|---|--------------|--------|
| 1 drum pallet | 17/64.4 | 1000/454 | 25.75 x 27 x 6 in (654 x 686 x 153 mm) | - | 1611ST |
| 2 drum pallet | 74/280.2 | 2000/907 | 51.25 x 27 x 13 in (1302 x 686 x 585 mm) | E, S,O ,I, A | 1620ST |
| 4 drum pallet | 92/348.3 | 4000/1814 | 54.25 x 54 x 12 in (1378 x 1372 x 305 mm) | | 1640ST |

| Accessories | Load-bearing* Capacity lb/kg | External W x D x H | Model |
|---------------|------------------------------|--|---------|
| Grating panel | 1000/454 | 25 x 26.5 x 0.875 in (635 x 673 x 22 mm) | 1611STG |


*Loads are stated as a total safe allowable uniform distributed load



Eagle Modular Spill Platforms

Create your own spill-control system for drum filling and dispensing operations

- Seamless construction eliminates leaks
- High density polyethylene (HDPE) construction with lead-free UV protectant provides excellent chemical resistance and impact durability for long life
- Removable HDPE flat top grates for simplified cleaning
- Black models and grates made with 100% recycled HDPE
- Forklift pockets on most models for easy relocation
- Use optional Sump-to-Sump™ drain kit to join platforms together and gain full compliance with regulations for sump capacity. Includes one pair rubber grommets and one polytetrafluoroethylene (PTFE) transfer tube. (Patent No US 6,622,879,B1)
- Load and unload heavy drums with ease using optional ramp with anti-skid diamond pattern—use with most platform sizes

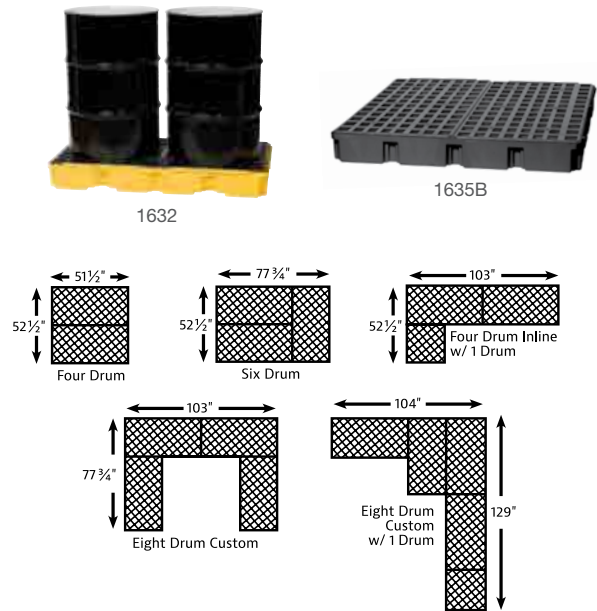

| Description | Sump Capacity Gal/L | Load-bearing* Capacity lb/kg | External W x D x H | Compliance | Model Black | Model Yellow | Compatible w/Ramp | Forklift Pockets |
|---------------------------------|------------------------------------|------------------------------|--|------------|-------------|--------------|-------------------|------------------|
| 1 drum platform | 15/56.8 | 2000/907 | 26.25 x 26 x 6.5 in (667 x 661 x 166 mm) | — | 1633B | 1633 | No | No |
| 1 drum platform w/drain | | | | | 1633BD | 1633D | | |
| 2 drum platform | 30/113.6 | 5000/2268 | 26.25 x 51.5 x 6.5 in (667 x 1309 x 166 mm) | — | 1632B | 1632 | Yes | Yes |
| 2 drum platform w/drain | | | | | 1632BD | 1632D | | |
| 3 drum in-line platform | 45/170.3 | 5000/2268 | 26.25 x 77.5 x 6.5 in (667 x 1969 x 166 mm) | — | — | 16323 | Yes | Yes |
| 4 drum square platform | 60.5/229.1 | 10000/4536 | 51.5 x 51.5 x 6.5 in (1309 x 1309 x 166 mm) | E, S, O | 1635B | 1635 | Yes | Yes |
| 4 drum square platform w/drain | | | | | 1635BD | 1635D | | |
| 4 drum in-line platform | 60.5/229.1 | 10000/4536 | 103.5 x 26.5 x 6.5 in (2629 x 667 x 166 mm) | E, S, O | 1647B | 1647 | Yes | No |
| 4 drum in-line platform w/drain | | | | | 1647BD | 1647D | | |
| 6 drum platform | 88/333.2 | 10000/4536 | 78.25 x 51.5 x 6.5 in (1988 x 1309 x 166 mm) | E, S, O | 1686B | 1686 | Yes | No |
| 6 drum platform w/drain | | | | | 1686BD | 1686D | | |
| 8 drum platform | 121/458.1 (60.5/229.1 per side) | 10000/4536 | 103 x 51.5 x 6.5 in (2617 x 1309 x 166 mm) | E, S, O | 1688B | 1688 | Yes | No |
| 8 drum platform w/drain | | | | | 1688BD | 1688D | | |
| Ramp | — | 1500/680 | 45.5 x 32 x 8 in (1156 x 813 x 203 mm) | — | 1689B | 1689 | — | — |

*Loads are stated as a total safe allowable uniform distributed load and apply to service temperature range of -30 F to 120 F (-34 C to 49 C)

| Accessories | External W x D x H | Model |
|---|--|--------|
| 1 drum grate for 1 drum unit and 3 drum in-line | 25.25 x 25.25 x 1.5 in (642 x 642 x 38 mm) | 1642S |
| 2 drum grate for all sizes except 1 drum | 25.25 x 50.5 x 1.5 in (642 x 1283 x 38 mm) | 1642IB |
| Sump-to-Sump™ drain kit | — | 28800 |

Eagle Spill Containment Pallets

Keep workers safe from accidental slips indoors and avoid costly hazmat cleanup costs

- Seamless construction eliminates leaks, making them ideal for drum filling and dispensing operations—models available with and without drain
- High density polyethylene (HDPE) construction with lead-free UV protectant provides excellent chemical resistance and impact durability for long life
- Black models and grates made with 100% recycled HDPE
- Removable HDPE flat top grates for simplified cleaning
- Forklift pockets make relocation easy
- Models available for high capacity sump applications, as well as nestable pallets for minimizing storage space requirements when not in use
- Load and unload heavy drums with ease using optional ramp with anti-skid diamond pattern—use with most pallet sizes
- EPA compliant and supports SPCC, unless noted



1645BND



1640BND



1646

| Description | Sump Capacity Gal/L | Load-bearing* Capacity lb/kg | External W x D x H | Compliance | Model Black | Model Yellow | Compatible w/Ramp |
|---|---------------------|------------------------------|--|------------|-------------|--------------|-------------------|
| 2 drum pallet | 66/249.9 | 4000/1814 | 51 x 26.25 x 13.75 in (1296 x 667 x 350 mm) | E, S, O | 1620BND | 1620ND | No |
| 2 drum pallet w/drain | | | | | 1620B | 1620 | |
| 4 drum square pallet | 66/249.9 | 8000/3629 | 51.5 x 51.5 x 8 in (1309 x 1309 x 204 mm) | | 1645BND | 1645ND | Yes |
| 4 drum square pallet w/drain | | | | | 1645B | 1645 | |
| 4 drum square pallet, high capacity | 132/499.7 | 8000/3629 | 52.5 x 51 x 13.75 in (1334 x 1296 x 350 mm) | | 1640BND | 1640ND | Yes |
| 4 drum square pallet w/drain, high capacity | | | | | 1640B | 1640 | |
| 4 drum nestable pallet | 66/249.9 | 6000/2722 | 58.5 x 58.5 x 7.75 in (1486 x 1486 x 197 mm) | | — | 1646 | Yes |
| Ramp | — | 1500/680 | 45.5 x 32 x 8 in (1156 x 813 x 203 mm) | | — | 1689B | 1689 |

*Loads are stated as a total safe allowable uniform distributed load and apply to service temperature range of -30 F to 120 F (-34 C to 49 C)

| Replacement Grates | External W x D x H | Model |
|---|---|--------|
| 2 drum grate for all models except 1646 | 25.25 x 50.5 x 1.5 in (642 x 1283 x 38 mm) | 1642IB |
| 2 drum grate for model 1646 | 25.25 x 50.5 x 1.75 in (642 x 1283 x 45 mm) | 1642B |

EcoPolyBlend™ IBC Pallet and IBC Shed

Reliable spill protection and safe storage for IBCs—meets EPA, supports SPCC

- Compliant storage for 275- or 330-gal (1000 or 1250-liter) IBCs
- Made of durable 40% recycled polyethylene offering excellent chemical resistance
- Large leakproof sump protects against high volume spills
- Sturdy pillar supports accept up to 9,000-lb (4082-kg)
- Removable pillars for easy cleanup
- Forklift pockets for easy relocation when empty



Outdoor design features lockable, dual-access roll-top doors and includes reach pole for easy closure.

| Description | Recycled Content | Sump Capacity Gal/L | Load-bearing* Capacity lb/kg | External W x D x H | Compliance | Model |
|---------------------------|------------------|---------------------|------------------------------|--|------------|-------|
| IBC indoor pallet | 40% | 372/1408 | 9000/4082 | 55 x 55 x 37.5 in (1397 x 1397 x 952 mm) | E, S, O | 28674 |
| IBC outdoor shed w/pallet | | | | 60.75 x 68.5 x 103.75 in (1543 x 1740 x 2635 mm) | | 28677 |
| Replacement Reach Pole | | | | 1.125 dia x 60 in L (28 dia x 1524 mm L) | — | 28690 |

*Loads are stated as a total safe allowable uniform distributed load and apply to service temperature range of -30 F to 120 F (-34 C to 49 C)
Accepts IBCs up to 48-in W x 48-in D x 53-in H (1219-mm W x 1219-mm D x 1346-mm H)

EcoPolyBlend™ Spill Trays

Lightweight and low-profile design for small-scale spill control

- Made of 100% recycled polyethylene, these eco-friendly spill trays will not rust or corrode
- Raised rib bottom adds rigidity and keeps contents out of spills—perfect for pouring and filling applications

| Sump Capacity Gal/L | External W x D x H | Nominal Interior W x D x H | Model |
|---------------------|---|---|-------|
| 12/45 | 46 x 16 x 5.5 in 1168 x 406 x 140 mm | 40.375 x 10.375 x 4.875 in 1026 x 264 x 124 mm | 28715 |
| 20/75 | 38 x 26 x 5.5 in 965 x 660 x 140 mm | 32.375 x 20.375 x 4.875 in 822 x 518 x 124 mm | 28716 |
| | 47.5 x 23 x 5.5 in 1207 x 584 x 140 mm | 41.875 x 17.375 x 4.875 in 1064 x 441 x 124 mm | 28717 |
| 23/87 | 37.75 x 34 x 5.5 in 959 x 864 x 140 mm | 31.875 x 28.375 x 4.875 in 810 x 721 x 124 mm | 28718 |
| 29/109 | 47 x 33 x 5.5 in 1194 x 838 x 140 mm | 41.375 x 27.375 x 4.875 in 1051 x 695 x 124 mm | 28719 |

*Loads are stated as a total safe allowable uniform distributed load and apply to service temperature range of -30 F to 120 F (-34 C to 49 C)



28719



28716

EcoPolyBlend™ DrumSheds™

Safe, secure, and compliant outdoor storage for drums

- Made of eco-friendly, weather resistant 50% recycled polyethylene
- Roll top doors allow access from front or rear
- Leakproof pallet sump has removable deck grating for easy cleanup
- Features grounding capability, integral anchor bolts, and molded lugs for padlocks
- Forklift pockets make it easy to relocate empty sheds
- A spacious interior enables safe addition of funnels or pumps
- EPA compliant and supports SPCC



28676 (closed)



Easily roll drums into a DrumShed™ for storage.

| Description | Recycled Content | Sump Capacity Gal/L | Load-bearing* Capacity lb/kg | External W x D x H | Compliance | Model |
|--------------------------|-----------------------------|---------------------|------------------------------|--|------------|----------------|
| 2 drum drumShed™ | 50% | 67/254 | 2500/1134 | 60.75 x 58.50 x 75.25 in (1543 x 1486 x 1911 mm) | E, S, O | 28675 |
| 4 drum drumShed™ | | 79/301 | 5000/2268 | 60.75 x 68.50 x 75.25 in (1543 x 1740 x 1911 mm) | | 28676 |
| Ramp | 100% - Black 0% - Yellow | — | 1000/455 | 48 x 59.75 x 11.25 in (1219 x 1518 x 286 mm) | — | 28679 28678 |
| Low line pallet - 2 drum | 100% | 67/254 | 2500/1134 | 55 x 45 x 9 in (1397 x 1143 x 229 mm) | E, S, O | 28672 |
| Low line pallet - 4 drum | | 79/301 | 5000/2268 | 55 x 55 x 9 in (1397 x 1397 x 229 mm) | | 28673 |

*Loads are stated as a total safe allowable uniform distributed load and apply to service temperature range of -30 F to 120 F (-34 C to 49 C)

EcoPolyBlend™ Single- and Double-Drum Collection Centers

All-weather construction stands up to the harshest environments

- Chemical-resistant 100% recycled polyethylene offers effective and economical spill control for 55-gallon (200-liter) drums
- Forklift channels allow for easy relocation when empty
- Lids include lock to prevent unauthorized access



28685 with funnel 28680 on 28270 steel dolly



Dual covers open separately for convenient access to either drum.

| Description | Sump Capacity Gal/L | Outside W x D x H | Compliance | Model |
|----------------------------------|---------------------|--|------------|-------|
| Double-drum collection center | 180/681 | 60 x 39 x 47 in (1524 x 991 x 1194 mm) | E, S, O | 28683 |
| Single-drum collection center | 66/250 | 33 top dia x 31.75 in (838 top dia x 806 mm) | | 28685 |
| Steel drum dolly for single drum | — | fits 28685 | — | 28270 |

EcoPolyBlend™ Spill Containment Caddy

Convenient handling, dispensing and built-in spill containment—all in one product!

- Durable 100% recycled polyethylene provides corrosion resistance and leakproof protection
- Rubber 10-in (254-mm) wheels easily roll over uneven terrain
- Allows one person to transport a full 55-gallon (200-liter) drum
- Ergonomic design with tilt/stop reduces back strain
- 2 tension straps hold drum securely in place
- 66-gallon (250-liter) spill sump contains chemical spills—meets EPA and supports SPCC



Two-wheeled design makes for easy transport.

| Description | Sump Capacity Gal/L | Load-bearing Capacity lb/kg | External W x D x H | Compliance | Model Black | Model Yellow |
|----------------------|---------------------|-----------------------------|---------------------------------------|------------|-------------|--------------|
| Indoor/outdoor caddy | 66/250 | 1250/567 | 32 x 72 x 26 in (813 x 1829 x 660 mm) | E, S, O | 28665 | 28664 |

*Loads are stated as a total safe allowable uniform distributed load and apply to service temperature range of -30 F to 120 F (-34 C to 49 C)

EcoPolyBlend™ Spill Control Funnels

An eco-friendly, cost-effective way to collect liquids and keep drum tops clean

- Funnels for use with closed-head 30- and 55-gallon (110-and 200-liter) drums
- Low-profile wide opening allows easy pouring
- Sloped design minimizes splashes and prevents containers from resting in liquids
- Large flat well at throat of funnel for passive draining of paint tins, filters, buckets and other containers
- Funnel for flammable liquids includes drum fill vent with brass flame arrester, threaded bung cap with tight seal, and pressure relief valve for high temperatures



Wide diameter opening allows for quick and easy pouring.

| Description | Sump Capacity Gal/L | OD x H | Compliance | Model |
|---------------------------|---------------------|----------------------------|------------|-------|
| Funnel for non-flammables | 2.5/9 | 21 x 3.25 in (533 x 83 mm) | 0 | 28680 |
| Funnel for flammables | | | | 28681 |
| Cover for funnel 28680 | | 19 x 3.25 in (482 x 32 mm) | — | 28682 |

EcoPolyBlend™ Drum Management System

Organize drums for maximum efficiency, productivity and cost-savings

- 100% recycled molded polyethylene construction
- Stackable design stores up to four 30- and/or 55-gallon (110- and/or 200-liter) Class 1B or 1C drums
- Three-part system includes a base module, stack module and dispensing shelf
- **Base module** holds two drums with a 3060-lb (1388-kg) total load capacity. 66-gallon (250-liter) open-view containment sump makes it easy to see spills. Meets EPA and supports SPCC.
- **Stack module** holds two further drums doubling the load capacity to 1500-lb (680-kg)
- **Dispensing shelf:** has a load capacity of 60-lb (27-kg) and mounts securely to stack module



EcoPolyBlend™ drum management system combines efficient drum storage and positive spill control.



28667 Base • 28669 Stacker with strap • 28671 Shelf



28667 Base

| Description | Sump Capacity Gal/L | Load-bearing* Capacity lb/kg | External W x D x H | Compliance | Model Black | Model Yellow |
|------------------|---------------------|------------------------------|---|------------|-------------|--------------|
| Base module | 66/250 | 3060/1388 | 49 x 59 x 26 in (1245 x 1499 x 660 mm) | E, S, O | 28667 | 28666 |
| Stack module | — | 1500/680 | 49 x 46 x 12 in (1245 x 1168 x 305 mm) | — | 28669 | 28668 |
| Dispensing shelf | — | 60/27 | 19.5 x 18.75 x 16.5 in (495 x 476 x 419 mm) | — | 28671 | — |

*Loads are stated as a total safe allowable uniform distributed load and apply to service temperature range of -30 F to 120 F (-34 C to 49 C)

Why do I need a Aerosolv® Aerosol Can Recycling System?

Companies can pay hefty fines for the improper handling of hazardous waste. Aerosol cans are no exception. Considered hazardous waste while still under pressure, it is illegal for businesses to dispose of spent aerosol cans in the trash.

With Aerosolv, you can safely puncture the aerosol can, relieve the can's pressure, filter VOCs, and collect any residual liquids. Punctured, discharged cans do not meet the definition of hazardous waste per EPA 40CFR 261.23(a)(6), and thus can be treated as recyclable scrap steel.

Over 3 billion aerosol cans are produced annually in the U.S. alone.* Turning aerosol cans from hazardous waste to recyclable steel not only avoids costly fines, it helps lower the impact on our environment and saves money.

Benefits of using Aerosolv® Systems:

- Saves companies thousands of dollars on hazardous waste disposal cost
- Minimizes hazardous waste streams and saves on landfill space for a cleaner environment
- Recycled steel turns into recycling profits


*Source: Consumer Specialty Products Association (CSPA)

Did you know?



Approximately 4 aerosol cans equal one pound of steel. Every pound of steel recycled saves 5,450 BTUs of energy ... enough to light a 15-watt compact fluorescent light (CFL) bulb for over 100 hours.†

†Source: PA Dept. of Environmental Protection

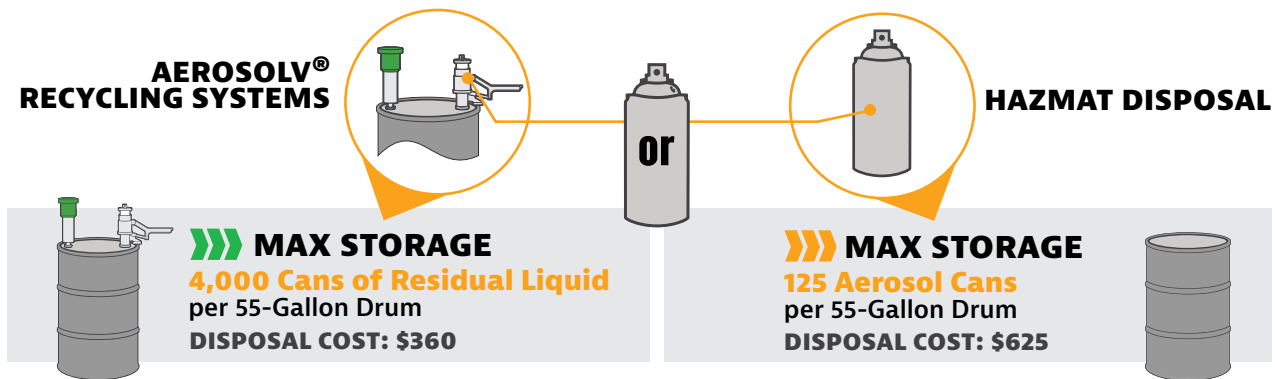

WHAT IS THE IMPACT AND COST OF 4,000 CANS?

- Disposal of one 55-Gallon Drum
- RCRA Empty Compliance
- Revenue Generating Scrap Metal




Puncture Point: Proof the can is now recyclable



COST: \$360

Note: Disposal costs are estimations

Disposal of thirty-two 55-Gallon Drums

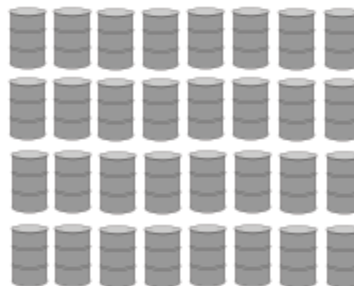

COST: \$20,000

Aerosolv® Aerosol Can Recycling System

Safely convert used aerosol cans to a non-hazardous material—reducing disposal costs and minimizing waste

- Punctured/discharged cans don't meet definition of hazardous waste EPA 40 CFR 261.23(a)(6), and be used as recyclable metal
- Aluminum body with moving parts of 308 stainless steel
- Includes combination filter, safety goggles, and anti-static ground wire with alligator clip
- Accepts standard sized cans with a maximum height of 8.5-in (215-mm)
- Non-spark pin punctures can, releasing residual liquids into collection drum
- Bottom cartridge converts liquid into droplets for safe drainage
- Top activated carbon filter cartridge acts as a replacement reminder



Use Aerosolv® anywhere you find aerosol cleaners, adhesives, and lubricants.

| Description | Shipping W x D x H | Compliance | Model | CA Prop 65 |
|-------------|--|------------|-------|------------|
| Aerosolv® | 18 x 18 x 7 in (457 x 457 x 178 mm) | E | 28202 | ⚠ |

| Accessories | Model |
|---|-------|
| Counter accessory for any Aerosolv® Unit | 28225 |
| Color changing combination coalescing/carbon filter | 28224 |
| Color changing activated carbon cartridge (2pk) | 28223 |
| Combination coalescing/carbon filter (non-color changing) | 28197 |
| Activated carbon cartridge (2pk) (non-color changing) | 28198 |
| Aerosolv® maintenance repair kit (for use with any Aerosolv®) | 28200 |
| Includes: 1 non-sparking puncture pin with O-rings | |
| 1 Aeroprene (polychloroprene) gasket | |
| 1 Spring | |
| 3 bridge pins | |
| 1 tube of grease | |
| Replacement Aeroprene (polychloroprene) gasket | 28111 |
| Replacement poly sleeve | 28181 |

†Coalescing filter can only be purchased in combination with a carbon filter.

Note: With the 28202 Aerosolv® unit you must leave the last aerosol can punctured and drained clamped in the unit to maintain a closed container as defined by OSHA.

Non-Color Changing Filter



Color Changing Filter



⚠ **WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Aerosolv® Plus System

Avoid fines and meet RCRA—save thousands of dollars on disposal costs. Turn spent aerosol cans into recyclable material.

- Made of aluminum with moving parts of 308 stainless steel—accepts standard sized cans with a maximum height of 8.5-in (215-mm)
- Push handle punctures and drains residual liquids into drum—collects the contents of approximately 4,000 spent cans
- Poly safety shield on slide bar minimizes spray back should operator error occur during insertion
- Two-stage high-efficiency combination filter reduces VOCs
- Filter base with replaceable, proprietary polymer coalescer captures residual liquid in the gas before it reaches the activated carbon—extends the life of the filter
- Adsorption indicator in top activated carbon filter cartridge
- Includes goggles and anti-static ground wire with alligator clip



For facilities using small to medium amounts of aerosol cans, Aerosolv Plus offers a legal, affordable way to minimize the high expense of hazardous waste disposal.



Insert inverted can into sleeve, rotate safety shield, and twist knob for secure closure to reduce spray back.



Smooth side puncture leaves no jagged edges.



Combination filter captures dangerous VOCs. Ultra-efficient, proprietary polymer coalescer in base of filter extends life by 33%—less change outs.

| Description | Shipping W x D x H | Approv/Lstg Regulation | Model | CA Prop 65 |
|---|-------------------------------------|------------------------|-------|------------|
| Aerosolv® Plus System | 18 x 18 x 9 in (458 x 458 x 229 mm) | E | 28170 | ⚠ |
| Filter replacement kit: carbon cartridge and coalescer (2 pack) | 10 x 6 x 6 in (254 x 152 x 152 mm) | — | 28102 | |
| Counter accessory for Aerosolv 28170 or 28202 | 3 x 3 x 3 in (76 x 76 x 76 mm) | — | 28225 | |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Aerosolv® 360

Ergonomic activation wheel quickly processes high volumes of aerosol cans into recyclable steel

- Enclosed system—dual seal chamber eliminates potential content spray back, prevents VOC release, and reduces gunk build up
- Wheel with rack and pinion gear increases torque
- Alignment cone and two-way pressure controlled, non-sparking vent pin offers the most efficient point of puncture
- High-efficiency combination carbon filter captures odors, and VOCs
- Integrated lock out system prevents unauthorized use and tamper-proof retention plate secures unit to drum
- Non-stick coating on housing minimizes static transfer and reduces clean up
- Includes goggles, anti-static ground wire with alligator clip, and built-in counter
- Accept cans up to 3-in (76-mm) in diameter and 8-in (203-mm) from bottom of can to base of dome



Fully closed recycling system punctures and drains aerosol cans with no content spray back—transforms cans from a hazardous to non-hazardous state.



Puncture point at the dome top offers fast evacuation and less mess.



Ultra-efficient coalescer extends filter life by 33%—less change outs, saving time and money.

| Description | Shipping W x D x H | Approv/Lstg Regulation | Model | CA Prop 65 |
|---|-------------------------------------|------------------------|-------|------------|
| Aerosolv® 360 System | 18 x 18 x 9 in (458 x 458 x 229 mm) | E | 28100 | ⚠ |
| Filter replacement kit: carbon cartridge and coalescer (2 pack) | 10 x 6 x 6 in (254 x 152 x 152 mm) | — | 28102 | |

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Aerosolv® Super System

ETV certified system safely recycles spent aerosol cans, reduces disposal costs, and minimizes waste

- Offers greater vapor reduction and added security
- Protective coating for easy cleaning
- Lock-out and shut-off mechanism seals system and drum when not in use to eliminate escape of hazardous vapors
- Includes saturation indicating carbon filter, padlock with key, anti-static ground wire with C-clamp, safety goggles, and built-in counter



Built-in counter is a great tool for easy adherence to your ISO 14001 program.

| Description | Shipping W x D x H | Compliance | Model |
|---|-------------------------------------|------------|-------|
| Aerosolv® super system with counter | 18 x 18 x 7 in (457 x 457 x 178 mm) | E, V | 28230 |
| Color changing combination coalescing/carbon cartridge with auto shut-off valve | 6 x 6 x 16 in (152 x 152 x 406 mm) | — | 28228 |
| Replacement color changing activated carbon cartridge (2 pack) | | | 28229 |

Aerosolv® Dual-Compliant System

Designed to comply with California’s vapor emission regulation SB1158, ETV certified

- Offers greater security featuring a shut-off valve in the puncturing unit and a check valve in the carbon cartridge to prevent off-gassing
- Poly lid cover containment sump help with compliance when you are accumulating or transporting processed aerosol cans for scrap
- Includes a combination coalescing/saturation indicating carbon filter, a padlock, antistatic ground wire with C-clamp, safety goggles, and built-in counter



| Description | Shipping W x D x H | Compliance | Model |
|---|--------------------------------------|------------|-------|
| Aerosolv® dual compliant can disposal system with counter | 27 x 27 x 10 in (457 x 457 x 178 mm) | E, V | 28231 |

Note: See replacement filters above.

Prosolv® System

Safely recycle depressurized propane cylinders, and eliminate an entire category of hazardous waste from your waste stream

- Removes the sealing sleeve and internal valve stem from small 1-lb (0.45-kg) propane, propylene, MAPP, and some 0.75-in (19-mm) external male threaded calibration gas cylinders with schrader valves (Do not use with oxygen bottles)
- Empties and filters propellants from cylinders converting them into non-hazardous recyclable material



| Description | Shipping W x D x H | Compliance | Model |
|--|-------------------------------------|------------|-------|
| Prosolv® - Includes: vent device, carbon filter, antistatic wire, safety goggles, sleeve removal tool, and 40 certification tags | 15 x 11 x 7 in (381 x 279 x 178 mm) | E | 28190 |
| Replacement filter with 40 tags | 6 x 6 x 9 in (152 x 152 x 229 mm) | — | 28191 |

Outdoor Safety Lockers

Expert



Outdoor Safety Lockers— Non-Combustible

Safe and secure flammables and hazardous chemicals storage solution

- Reduce poison hazards, minimize contamination of chemicals, helps meet insurance requirements, and prevent costly fines
- Heavy gauge steel with leakproof, all welded sump and galvanized steel floor grating
- Chemical- and UV-resistant coating, inside and out
- 42-in (1.07-m) wide steel door system with 3-point lock
- Natural draft ventilation
- NFPA 704 diamond decal for content identification, forklift channels, static grounding connections, and anchoring plates for hold down protection
- Choose models with explosion relief for storage of Class 1A or dispensing of Class 1A and 1B flammables as defined by NFPA
- FM-approved and complies with EPA, NFPA 30, NFPA 1, and EPA



Sixteen-drum locker with optional steel ramp simplifies drum loading.



1. Air vents on both sides
2. Inside grounding lug
3. Leakproof sump with removable, galvanized steel grate floor
4. High visibility safety strip
5. Forklift channels
6. 3-point latching system
7. Outside grounding lug and anchor plate

NON-COMBUSTIBLE OUTDOOR SAFETY LOCKERS

| 55-Gal Drum Capacity | Sump Capacity Gal/L | Exterior W x D x H* | Approv/Lstg Regulation | Standard Model | Explosion Relief Model |
|----------------------|---------------------|---|------------------------|----------------|------------------------|
| 2 | 120/454 | 67 x 38 x 77.5 in (1702 x 965 x 1969 mm) | FM, N, A, E | 911020 | 911021 |
| 4 | 100/379 | 67 x 62 x 77.5 in (1702 x 1575 x 1969 mm) | | 911040 | 911041 |
| 6 | 140/530 | 91 x 62 x 99 in (2311 x 1575 x 2515 mm) | | 911060 | 911061 |
| 9 | 198/750 | 91 x 86 x 99 in (2311 x 2184 x 2515 mm) | | 911090 | 911091 |
| 12 | 253/958 | 84 x 115 x 99 in (2134 x 2921 x 2515 mm) | | 911120 | 911121 |
| 16 | 326/1234 | 115 x 110 x 99 in (2921 x 2794 x 2515 mm) | | 911160 | 911161 |

Note: Door height on 2- and 4-drum models is 51-in (1.30-m) high and 80-in (2.03-m) high on 6- through 16-drum models.
*Dimensions include mounting plates and door hardware.

Outdoor Safety Lockers— 2-hour Fire-Rated

Fire-rated construction for safe, storage of drums of flammables near existing structures and/or property set-backs as determined by the local authority having jurisdiction

- FM-approved fire rated 90-minute fire-rated door and roof design
- Layers of fire-resistant gypsum wall board encased between exterior heavy gauge steel and interior galvanized sheet steel for durability
- 42-in (1.07-m) wide door with UL Listed keyed lockset
- Gravity air flow vents with UL Listed fire dampers and fusible links—hydraulic door mechanism ensures automatic closure
- Leakproof, all welded sump and galvanized steel floor grating
- Chemical- and UV-resistant coating
- NFPA 704 diamond decal, forklift channels, static grounding connections, and anchoring plates
- Models with FM-approved explosion relief release panels at 20 psf
- Meets EPA, NFPA 30, NFPA 1, and EPA



Six-drum locker with optional ramp offers a convenient way to load or unload heavy drums using a drum dolly.



Independently tested and approved 90-minute fire-rated door



UL Listed air flow vent



Hydraulic door closer



| 55-Gal. Drum Capacity | Sump Capacity Gal/L | Exterior W x D x H* | Approv/Lstg Regulation | Standard Model | Explosion Relief Model |
|-----------------------|---------------------|---|------------------------|----------------|------------------------|
| 2 | 88/333 | 71 x 42 x 77.5 in (1803 x 1067 x 1969 mm) | FM, N, A, E | 912020 | 912021 |
| 4 | 80/303 | 71 x 66 x 77.5 in (1803 x 1676 x 1969 mm) | | 912040 | 912041 |
| 6 | 116/439 | 95 x 66 x 99 in (2413 x 1676 x 2515 mm) | | 912060 | 912061 |
| 9 | 168/636 | 95 x 90 x 99 in (2413 x 2286 x 2515 mm) | | 912090 | 912091 |
| 12 | 221/837 | 88 x 119 x 99 in (2235 x 3023 x 2515 mm) | | 912120 | 912121 |
| 16 | 288/1090 | 119 x 114 x 99 in (3023 x 2896 x 2515 mm) | | 912160 | 912161 |

Note: Door height on 2- and 4-drum models is 51-in (1.30-m) high and 80-in (2.03-m) high on 6- through 16-drum models.
*Dimensions include mounting plates and door hardware.

Outdoor Safety Lockers— 4-hour Fire-Rated

Higher fire rating—provides proximity advantage over non-combustible and 2-hour locker models

- 4-hour fire-rated construction with FM-approved 3-hour fire-rated door and roof design
- Layers of fire-resistant gypsum wall board encased between exterior heavy gauge steel and interior galvanized sheet steel
- 42-in (1.07-m) wide door with UL Listed keyed lockset
- Gravity air flow vents with UL Listed fire dampers and fusible links—hydraulic door mechanism ensures automatic closure
- Leakproof, all welded sump and galvanized steel floor grating
- Chemical- and UV-resistant coating
- NFPA 704 diamond decal, forklift channels, static grounding connections, and anchoring plates
- Models with FM-approved explosion relief release panels at 20 psf
- Meets EPA, NFPA 30, NFPA 1, and EPA
- Suitable for placement within close proximity of existing structures and/or property set-backs. Check with your local authority having jurisdiction.



Designed for close placement to existing structures, 4-hr fire-rated lockers provide a safe and convenient storage solution.



| 55-Gal. Drum Capacity | Sump Capacity Gal/L | Exterior W x D x H* | Approv/Lstg Regulation | Standard Model | Explosion Relief Model |
|-----------------------|---------------------|---|------------------------|----------------|------------------------|
| 2 | 75/284 | 71 x 42 x 77.5 in (1803 x 1067 x 1969 mm) | FM, N, A, E | 913020 | 913021 |
| 4 | 71/269 | 71 x 66 x 75.5 in (1803 x 1676 x 1969 mm) | | 913040 | 913041 |
| 6 | 105/397 | 95 x 66 x 99 in (2413 x 1676 x 2515 mm) | | 913060 | 913061 |
| 9 | 155/587 | 95 x 90 x 99 in (2413 x 2286 x 2515 mm) | | 913090 | 913091 |
| 12 | 205/776 | 88 x 119 x 99 in (2235 x 3023 x 2515 mm) | | 913120 | 913121 |
| 16 | 272/1030 | 119 x 114 x 99 in (3023 x 2896 x 2515 mm) | | 913160 | 913161 |

Note: Door height on 2- and 4-drum models is 51-in (1.30-m) high and 80-in (2.03-m) high on 6- through 16-drum models.
*Dimensions include mounting plates and door hardware.

Outdoor Safety Lockers— Optional Accessories

Accessorize your locker with options that improve function and add convenience

- Sturdy steel ramps to simplify loading or unloading heavy drums with a drum dolly
- Galvanized steel shelving for organized, easy access to smaller containers
- Heating and/or air conditioning where comfort, chemical stability or freeze protection is a concern
- Two varieties of fire protection—fuse linked extinguishers or an integral dry chemical system

NC Non-Combustible **FR** 2-Hour Fire-Rated
4-Hour Fire-Rated

Use the descriptions below, combined with the charts on the next page to determine the accessories available for each style of safety locker.

see page 122

NC
FR



Grounding Kit

Model 915505

Kit comes with rod – 5/8-in (16-mm) diameter x 8-ft (2438-mm) L, wire and connector

NC
FR



Loading Ramp

Steel with anti-skid yellow paint

- **Model 915001:**
48-in (1219-mm) W x 120-in (3048-mm) L
- **Model 915003:**
48-in (1219-mm) W x 88-in (2235-mm) L

NC
FR




Shelving

Models 915101 - 915105

Galvanized steel. Two-tier, 16-in (406-mm) wide with mounting brackets—back wall only

Not available on locker models with explosion relief panels. Shelf package for 2- and 4-drum models (915101) will limit the ability to load locker to full drum capacity.

NC
FR



Fiberglass Grate with Sump Liner

Models 915201 - 915211

High density polyethylene (HDPE) sump liner and fiberglass grate flooring for acid and corrosive chemical spill resistance

NC
FR



Basic Fire Protection System

Models 915401 - 915403

BC Type, FE-227 extinguisher unit, ceiling mounted and fuse linked

NC
FR



Dry Chemical Fire Suppression System

Model 915405

- FM-approved, UL Listed, ABC Type, dry chemical system with agent cylinder
- One pull station and means of remote annunciation

NC
FR



Interior Light and Fan Package

Model 915501

- Exterior on/off switch—UL listed
- Explosion-proof mechanical ventilator tied to light switch for forced vapor removal
- Explosion-proof conduit and wiring with seal-offs

NC
FR



Exterior Light

Model 915503

Explosion-proof and photocell activated

Only available when ordered with Interior Light/Fan Package 915501.

FR



Explosion-Proof Wall-mounted Heaters

- **Model 915301:** 6,000 btu
- **Model 915303:** 12,000 btu

Must be ordered in conjunction with the equivalent size R-11 insulation package.

FR



Explosion-Proof Air Conditioner

- **Model 915305:** 15,000 btu
- **Model 915307:** 20,000 btu

Must be ordered in conjunction with the equivalent size R-11 insulation package.

FR



Explosion Proof Wall-mounted Heater / Air Conditioner Package

- **Model 915309:** 6,000 / 15,000 btu
- **Model 915311:** 12,000 / 20,000 btu

Must be ordered in conjunction with the equivalent size R-11 insulation package.

FR



R-11 Insulation

Models 915601 - 915611

R-11 insulation in the ceiling, walls, and sump walls for added temperature control and use in conjunction with the air and heat packages

**Outdoor Safety Lockers—
Optional Accessories (continued)**

NC Non-Combustible **FR** 2-Hour Fire-Rated
4-Hour Fire-Rated

Use the charts below, combined with the optional accessories on the previous page to determine the accessories available for each style of safety locker.

see page 121



| Locker Capacity | Grounding Kit Model | Loading Ramp Model | Galvanized Steel* Shelving - 2 Tier Model | Fiberglass† Grate Flooring (with Sump Liner) Model | Basic Fire† Protection System Model | Dry Chemical Fire † Suppression Model | Interior Light† and Fan Electrical Package Model | Exterior Light†** Package Model |
|-----------------|---------------------|--------------------|---|--|-------------------------------------|---------------------------------------|--|---------------------------------|
| 2-drum | 915505 | 915001 | 915101 | 915201 | 915401 | NA | 915501 | 915503 |
| 4-drum | | 915003 | | 915103 | | | | |
| 6-drum | | | 915205 | | | | | |
| 9-drum | | | 915207 | | | | | |
| 12-drum | | | 915209 | | | | | |
| 16-drum | | 915105 | 915211 | | | | | |

Note: Due to space constraints in the 2- and 4-drum models, shelving and interior light packages cannot be ordered together.



| Locker Capacity | Grounding Kit Model | Loading Ramp Model | Galvanized Steel* Shelving - 2 Tier Model | Fiberglass† Grate Flooring (with Sump Liner) Model | Basic Fire† Protection System Model | Dry Chemical† Fire Suppression Model | Interior Light† and Fan Electrical Package Model | Exterior Light†** Package Model |
|-----------------|---------------------|--------------------|---|--|-------------------------------------|--------------------------------------|--|---------------------------------|
| 2-drum | 915505 | 915001 | 915101 | 915201 | 915401 | NA | 915501 | 915503 |
| 4-drum | | 915003 | | 915103 | | | | |
| 6-drum | | | 915205 | | | | | |
| 9-drum | | | 915207 | | | | | |
| 12-drum | | | 915209 | | | | | |
| 16-drum | | 915105 | 915211 | | | | | |

Note: Due to space constraints in the 2- and 4-drum models, shelving and interior light packages cannot be ordered together.

FR Fire-Rated Models (continued)

| Locker Capacity | Explosion-† Proof Heater Model | Explosion-Proof† Air Conditioner Model | Heater and† Air Conditioner Package Model | R-11 Insulation† Model |
|-----------------|--------------------------------|--|---|------------------------|
| 2-drum | NA | NA | NA | 915601 |
| 4-drum | | | | 915603 |
| 6-drum | 915301 | 915305 | 915309 | 915605 |
| 9-drum | | | | 915607 |
| 12-drum | 915303 | 915307 | 915311 | 915609 |
| 16-drum | | | | 915611 |

Note: Heating and air conditioning packages must be ordered in conjunction with the equivalent size insulation package on fire-rated lockers

† These accessories must be purchased in conjunction with a locker to ensure proper installation and to retain FM approval.

* Shelving is not available on models with explosion relief panels. Shelf package for 2- and 4-drum models (915101) will limit the ability to load locker to full capacity.

** Exterior light package is only available when ordered with the interior light/fan package 915501

Warehouse Shipping Locations

Illinois

Justrite Warehouse
6674 E. County Road 1000N
Mattoon, IL 61938
Tel: 1-217-234-7350
Fax: 1-217-234-3160

California

Western Safety Associates
267 Winfield Circle
Corona, CA 92880
Tel: 1-951-371-8685
Fax: 1-951-371-2496

North Carolina

Justrite Southeast
Distribution Ctr.
Tel: 1-800-798-9250
Fax: 1-800-488-5877

Europe

Justrite Europe
Distribution Ctr.
Duesseldorf, Germany
Tel: +31 180 615 744
infoEU@justrite.com

China (Mainland)

Justrite China
Wuxi, China
Tel: 011+86-400-812-1906
infoCN@justrite.com

China (Outside Mainland)

Justrite Asia
Zhuhai, China
Tel: 011+86-756-322-9909
infoCN@justrite.com

United Kingdom

Justrite U.K.
Stockport, United Kingdom
Tel: 0800 0939975
infoUK@justrite.com

Middle East

Justrite Dubai
United Arab Emirates
Tel: +971 6526 1997
infoME@justrite.com

Operations

U.S.A.

Justrite Safety Group
3921 DeWitt Avenue
Mattoon, IL 61938 U.S.A.

*Manufacturing, Finance (billings),
Purchasing, Information Technology &
Human Resources*
Tel: 1-217-234-7486
Fax: 1-217-234-7632

China

Justrite Safety Technology (Wuxi) Co., Ltd.
Room 502, Building B, A-Park
Technology & Business Center
#35 South Changjiang Road
Wuxi 214028, China
Tel: 011+86-400-812-1906
Fax: 011+86-510-85305038

Corporate - U.S.A.

Justrite Safety Group
2454 Dempster Street
Des Plaines, IL 60016 U.S.A.
Sales, Marketing & Administrative
Tel: 1-847-298-9250
Fax: 1-847-298-9261



Customer Service

North America

Tel: 1-800-798-9250
Fax: 1-800-488-5877
custserv@justrite.com

Latin America

Tel: 1-217-234-7494
Fax: 1-217-234-7420
internationalcs@justrite.com

EMEA

Tel: +31 180 615 744
Fax: +31 180 611 551
salesEU@justrite.com

Return shipments must be authorized. Call customer service for RMA form.

Justrite and Chemical Compatibility

Because of the complex nature of chemicals, Justrite cannot offer specific recommendations on chemical compatibility. Your chemical supplier, SDS sheets, or other expert sources should be consulted. To aid in your decision process to select the appropriate Justrite product for your application, contact Justrite Customer Service to obtain sample material parts for you to test with the chemicals you are using. Justrite makes no guarantee of results and assumes no obligation or liability in connection with the use of these products and their application relative to their chemical compatibility. It is the end user's sole responsibility to determine the nature of the materials to be contained and to select the proper product suitable for a particular application. Furthermore, it is the end user's responsibility to insure that the product selected is suitable for its intended use. **JUSTRITE MAKES NO WARRANTY, EXPRESSED OR IMPLIED OF MERCHANTABILITY OR FITNESS FOR PURPOSE**, and assumes no liability in connection with any product made or sold by Justrite with regard to its use or chemical compatibility.

Justrite Limited Warranty

Ask for Terms and Conditions where limited warranty is included.

Justrite Printed Catalog

Warranty Disclaimer: Justrite has made a diligent effort to illustrate and describe the products in this catalog accurately; however, such illustrations and descriptions are for the sole purpose of identification, and do not express or imply a warranty that the products are MERCHANTABILITY, or FIT FOR A PARTICULAR PURPOSE, or that the products will necessarily conform to the illustrations or descriptions. Always check for product specifications prior to purchase. No warranty or affirmation of fact, express or implied, other than as set forth in the limited warranty statement above is made or authorized by Justrite. Justrite reserves the right to correct publishing errors.

Note: Justrite metric equivalents may be inconsistently noted. Capacities shown may be nominal because some products may hold more than listed to accommodate manufacturing tolerances and expansion, as well as others are designed to accommodate additives which is a common practice with safety can usage. Additionally, "rounding" may occur to simplify data or where catalog space is restrictive. In other cases nominal capacities have simply become accepted "industry practice" over the last 100 years since Justrite has been in business.

Shipping weights are approximate and are subject to change.



For over a century, organizations around the world have relied on Justrite to keep their workers and workplaces safe. Justrite provides expert advice and leading industrial safety solutions to help customers meet—and exceed—compliance regulations.

Worker & Workplace Safety

- Safety & Storage Cabinets
- Safety Cans & Containers
- Smoking Receptacles
- Gas Cylinder Handling Equipment
- Drum Funnels & Equipment
- Outdoor Safety Lockers

Environmental Protection

- Spill Containment
- Secondary Containment
- Aerosol Recycling

Disset Odiseo
900 17 17 00 · 93 586 15 60
comercial@dissetodiseo.com